

# KBS TEKNISK RAPPORT

# 75

**Small-scale bentonite injection test  
on rock**

**Roland Pusch**

**Högskolan i Luleå 1978-03-02**

**KÄRN -  
BRÄNSLE -  
SÄKERHET**

*POSTADRESS: Kärnbränslesäkerhet, Fack. 102 40 Stockholm. Telefon 08-67 95 40*

SE 100037

SMALL-SCALE BENTONITE INJECTION  
TEST ON ROCK

Roland Pusch  
Högskolan i Luleå 1978-03-02

Denna rapport utgör redovisning av ett arbete som utförts på uppdrag av KBS. Slutsatser och värderingar i rapporten är författarens och behöver inte nödvändigtvis sammanfalla med uppdragsgivarens.

I slutet av rapporten har bifogats en förteckning över av KBS hittills publicerade tekniska rapporter i denna serie.

**REPORT 121**

**SMALL-SCALE BENTONITE  
INJECTION TEST ON ROCK**

Luleå 1978-03-02

Div. Soil Mechanics, University of Luleå

R. PUSCH

## SMALL-SCALE BENTONITE INJECTION TEST ON ROCK

### Introduction

Irrespective of the kind of radioactive waste products which are going to be deposited, a sealing of the rock in which the deposition holes are located is very valuable since it reduces the rate of water percolation and diffusion.

There are a number of possible techniques which can be used to seal the rock. Injection of bentonite gels by means of over-pressure and subsequent electrophoresis ("electro-kinetic treatment") has been suggested earlier by the author (PUSCH, 1977) and preliminary tests with glass-plates instead of rock have been fairly successful.

The present report describes a rock test series where bentonite injection was applied.

The main idea was to simulate the real conditions in a tunnel at great depth (Fig.1a). For these conditions the main steps in the injection program are:

1. A central pilot hole and a series of fairly closely located outer holes are bored. The central hole is later enlarged to form the deposition hole (cf. Fig.1b).
2. The central pilot hole (or the final hole for deposition) is filled with a Na bentonite suspension ( $w = 1000-2000\%$ ).
3. An over-pressure is applied in the hole with the suspension (an under-pressure can be applied as well in the surrounding bore holes) by which the dilute bentonite gel is forced into joints which extend from the central hole.

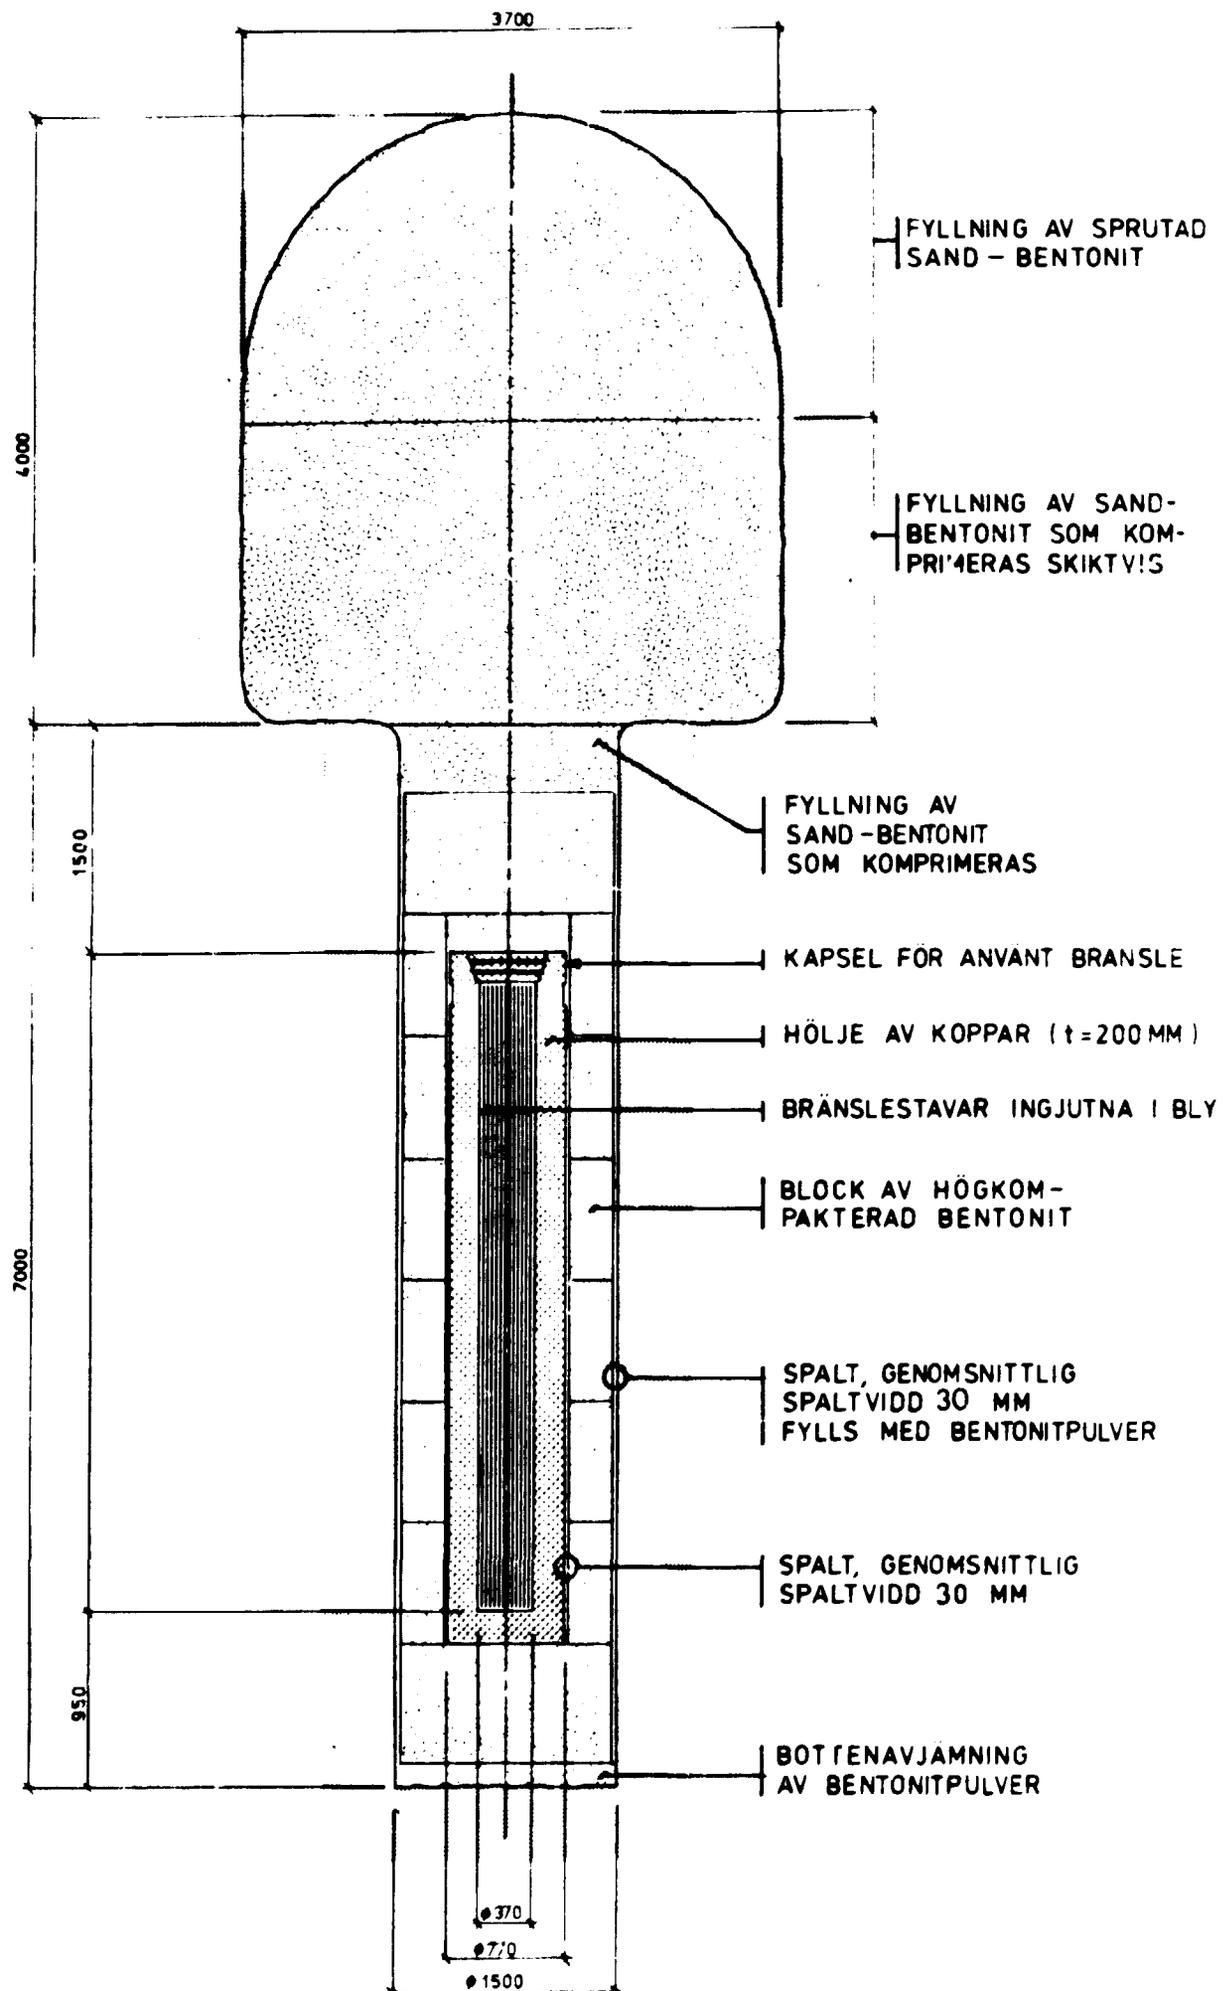


Fig.1a. Schematic picture of tunnel and deposition hole (VBB).

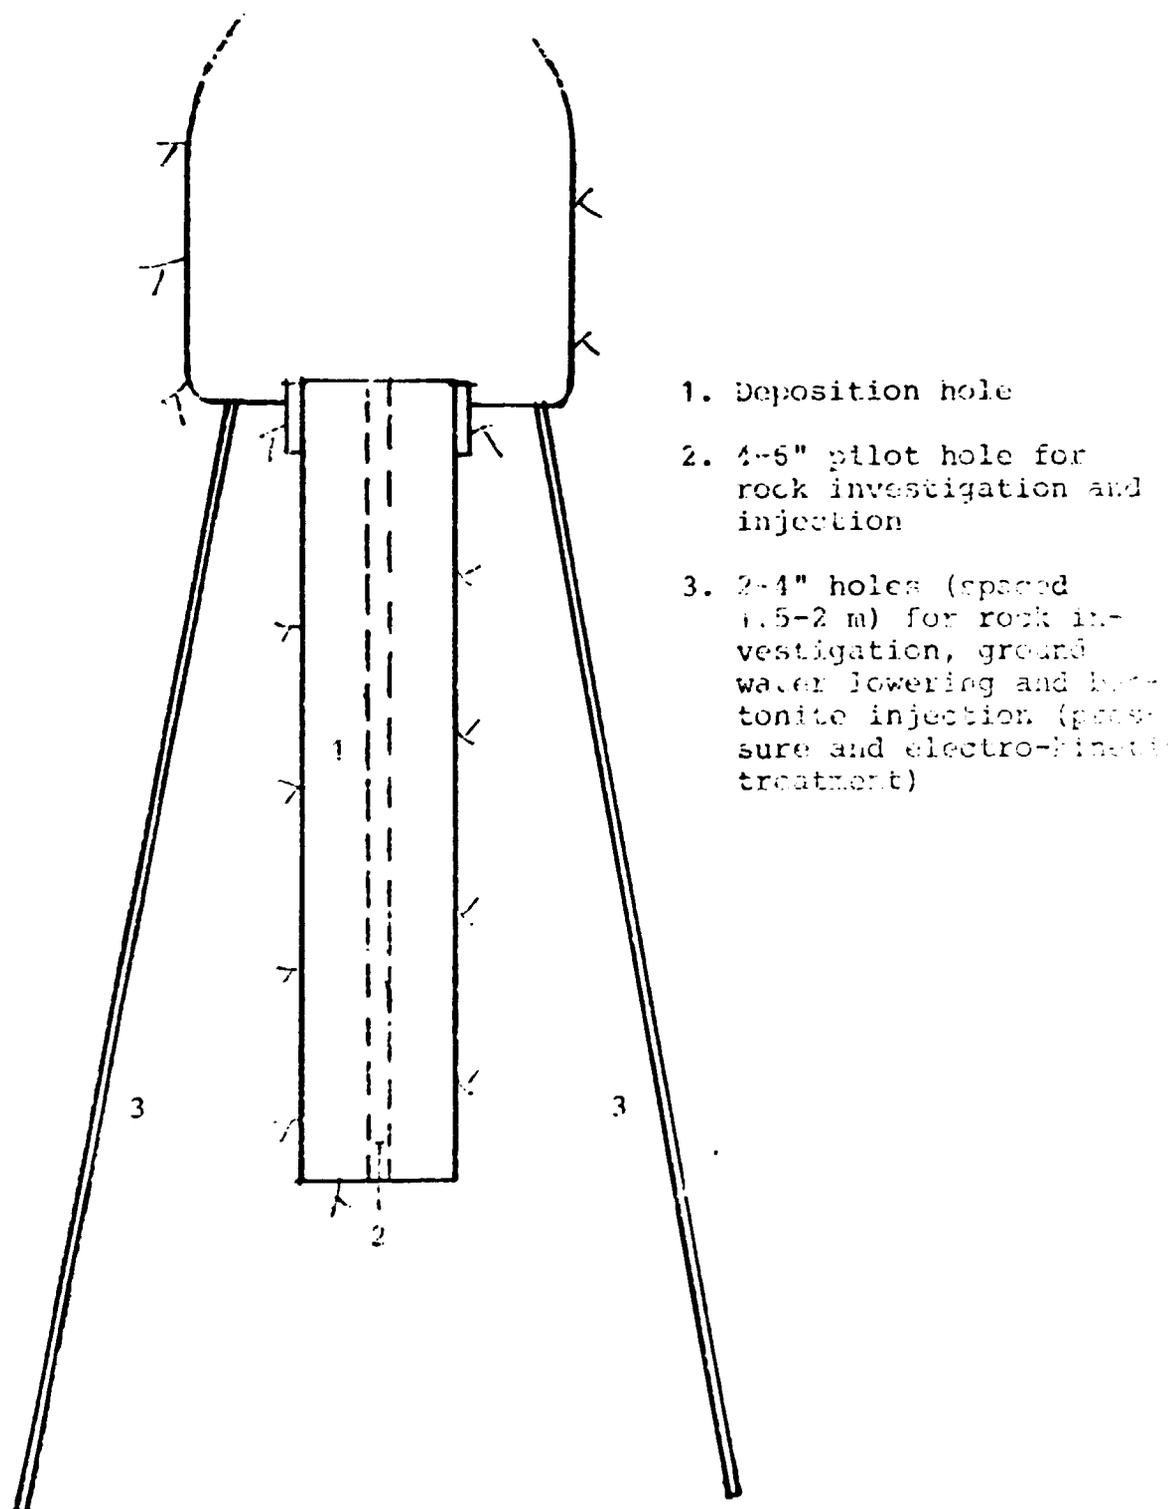


Fig. 1b. Bore hole arrangement. Holes 3 are sealed by inserting fairly closely fitting cylindrical bodies of highly compacted bentonite.

- 4
4. Electrodes are installed in the holes (cathode in the central hole and anodes in the circumferential holes) and a 200-2000V direct current is applied for about a week. By this, additional clay particles are transported from the central hole into the joints. The clay particles belong to the montmorillonite mineral group which is the dominant constituent in bentonite.

#### Test arrangement

##### Rock type, block preparation

The limited capacity of the lifting device in the test hall (3 tons) implied a maximum block size of about 1 m<sup>3</sup>. The block, which had an approximately cubical shape, was selected from a road construction work in Luleå on the 3rd of January. The rock type was diorite (metabasite) with a fairly high frequency of quartz lenses. The site from where the block was taken was located below the ground water level. Since the air temperature was well below -10°C the water in the joints froze and preserved the state of water saturation. In the warm test hall the block was flooded and covered to maintain this state (Fig. 2).

After core drilling it was transferred to a basin where it was submerged during the tests. To prevent permanent opening of joints by the pressure injection operations and to simulate the lateral support of the tunnel base, the block was confined in 15 cm reinforced concrete except for the upper side with the bore holes (Fig. 3).

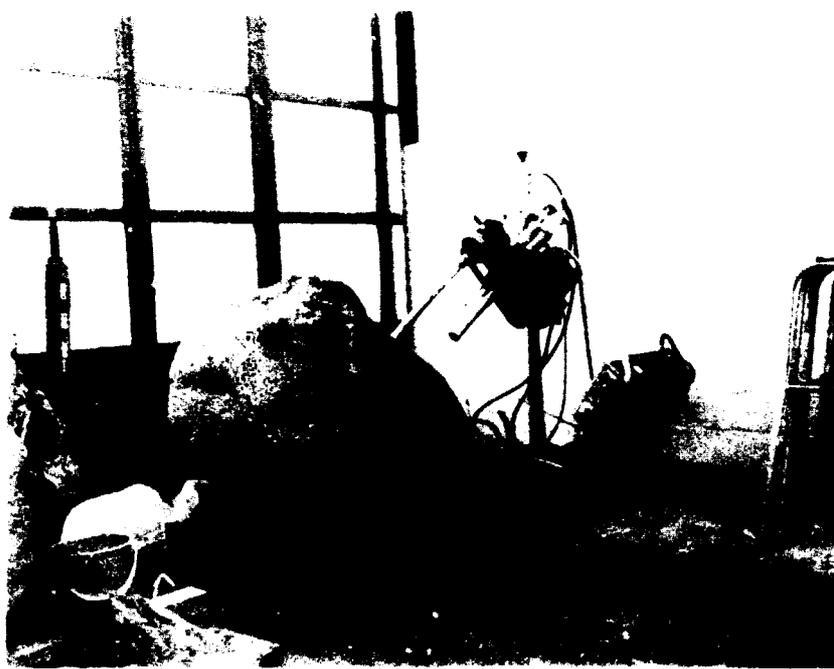


Fig. 2. Drilling device. The block was covered with plastic sheets to maintain water saturation.

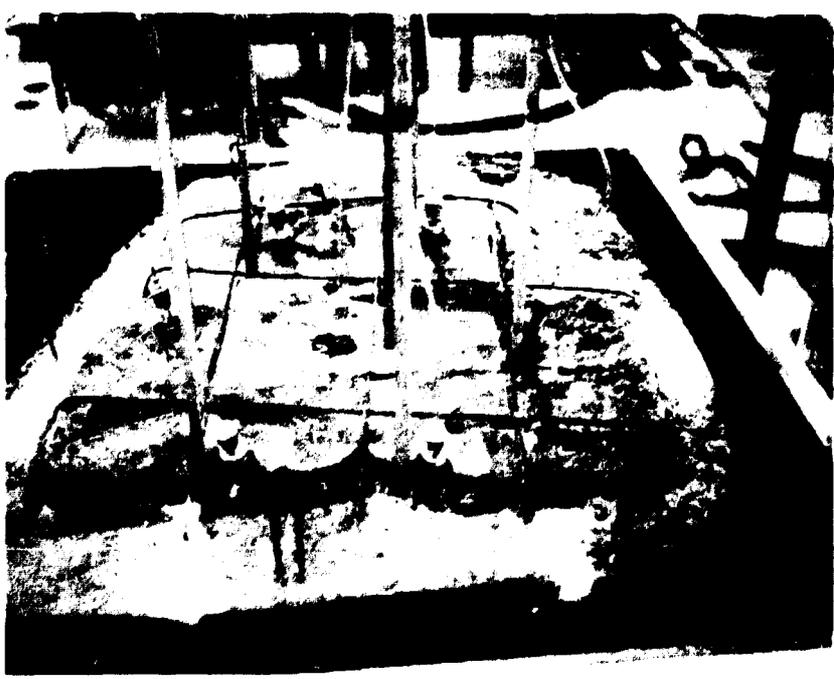


Fig. 3. Top surface of the concrete-confined block with electrodes installed. Pipe connections of glass and plastic were used for permeability measurement.

The holes, which were placed according to Fig. 4, were 4.3 cm in diameter and 48 cm deep. Holes no.1, 5 and 6 had to be inclined somewhat towards the central hole because of the irregular external shape of the block. No direct connection between the holes through joints or fissures could be seen with the naked eye. The regular joint pattern shown in Fig. 4 can be seen in the photograph in Fig. 3 also.

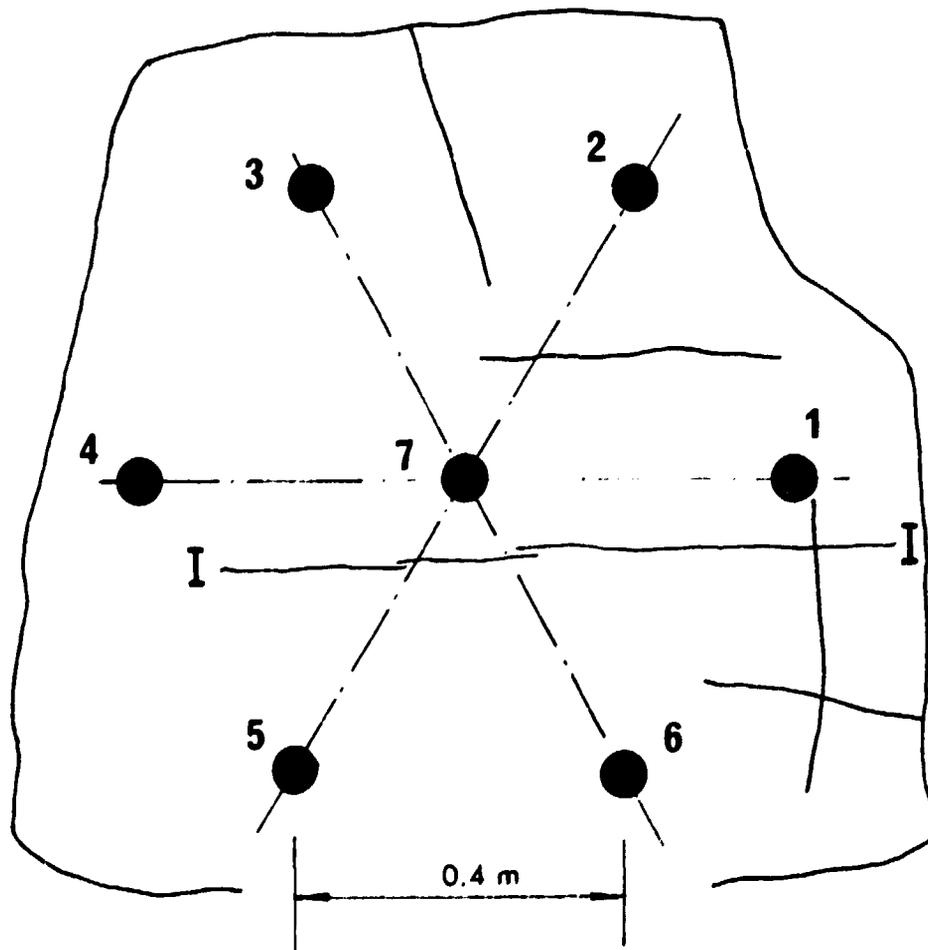


Fig. 4. Schematic top view of the block.

The cores (Fig. 5) were inspected with reference to joints and fissures, the observations being listed in Table 1.


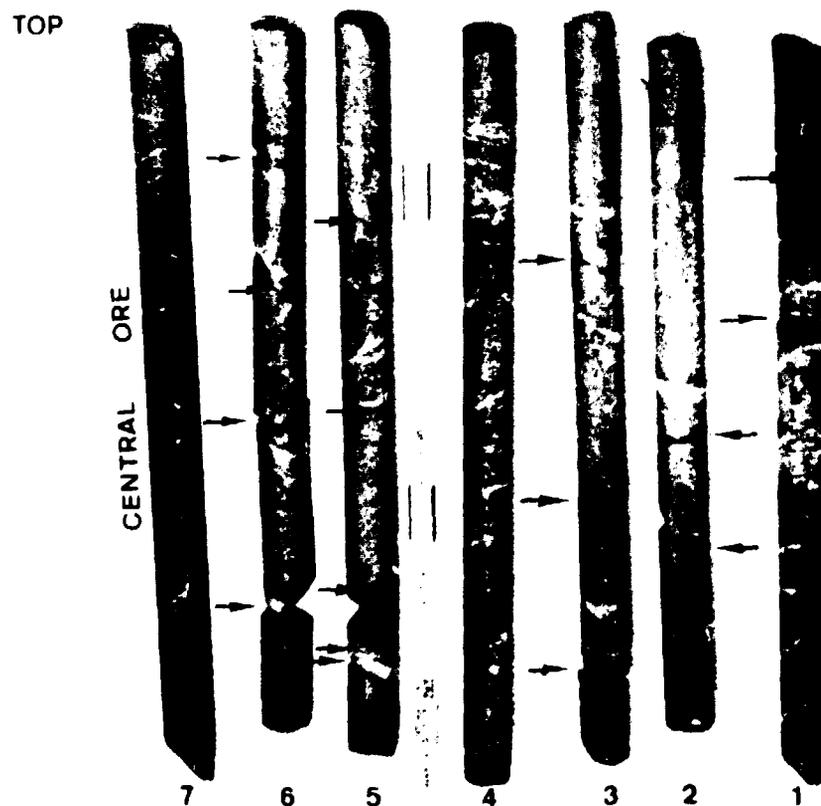


Fig. 5. Cores with joints indicated by arrows. Note that cores from hole 4 and 7 show no joints or fissures. The rather fine-grained rock matrix is rich in biotite and hornblende. As seen in the picture quartz lenses and laminae are frequent.

Table 1. Observed openings in cores. (Cores 4 and 7 dense).

	1	2	3	5	6
0					
5	Steep joint				
10				Slightly incl. joint	Slightly incl. joint
15	Horiz. joint		Incl. joint in quartz		Steep joint
20					
25		Horiz. joint		Axial joint	Horiz. joint
30					
35		Joint system	Joint system		
40				Joint system	Joint system
45					
50					

It should be noticed that the cores from the "deposition hole" (no. 7) and hole no. 4 had no joints or fissures. They gave the impression of being perfectly free from any kind of openings. It was not possible to draw any conclusions from the core inspection as concerns possible connections between the various holes. However, the permeability tests and the disintegration of the block after the test gave the information collected in Fig. 6. It is concluded that there is a connection through horizontal or slightly inclined joints between holes 1, 2, 5, 6 and (the base of) hole 7. The width of one joint was about 0.4 mm but most of them were probably less than 0.1 mm wide. The pore volume of the block estimated from the detailed determina-

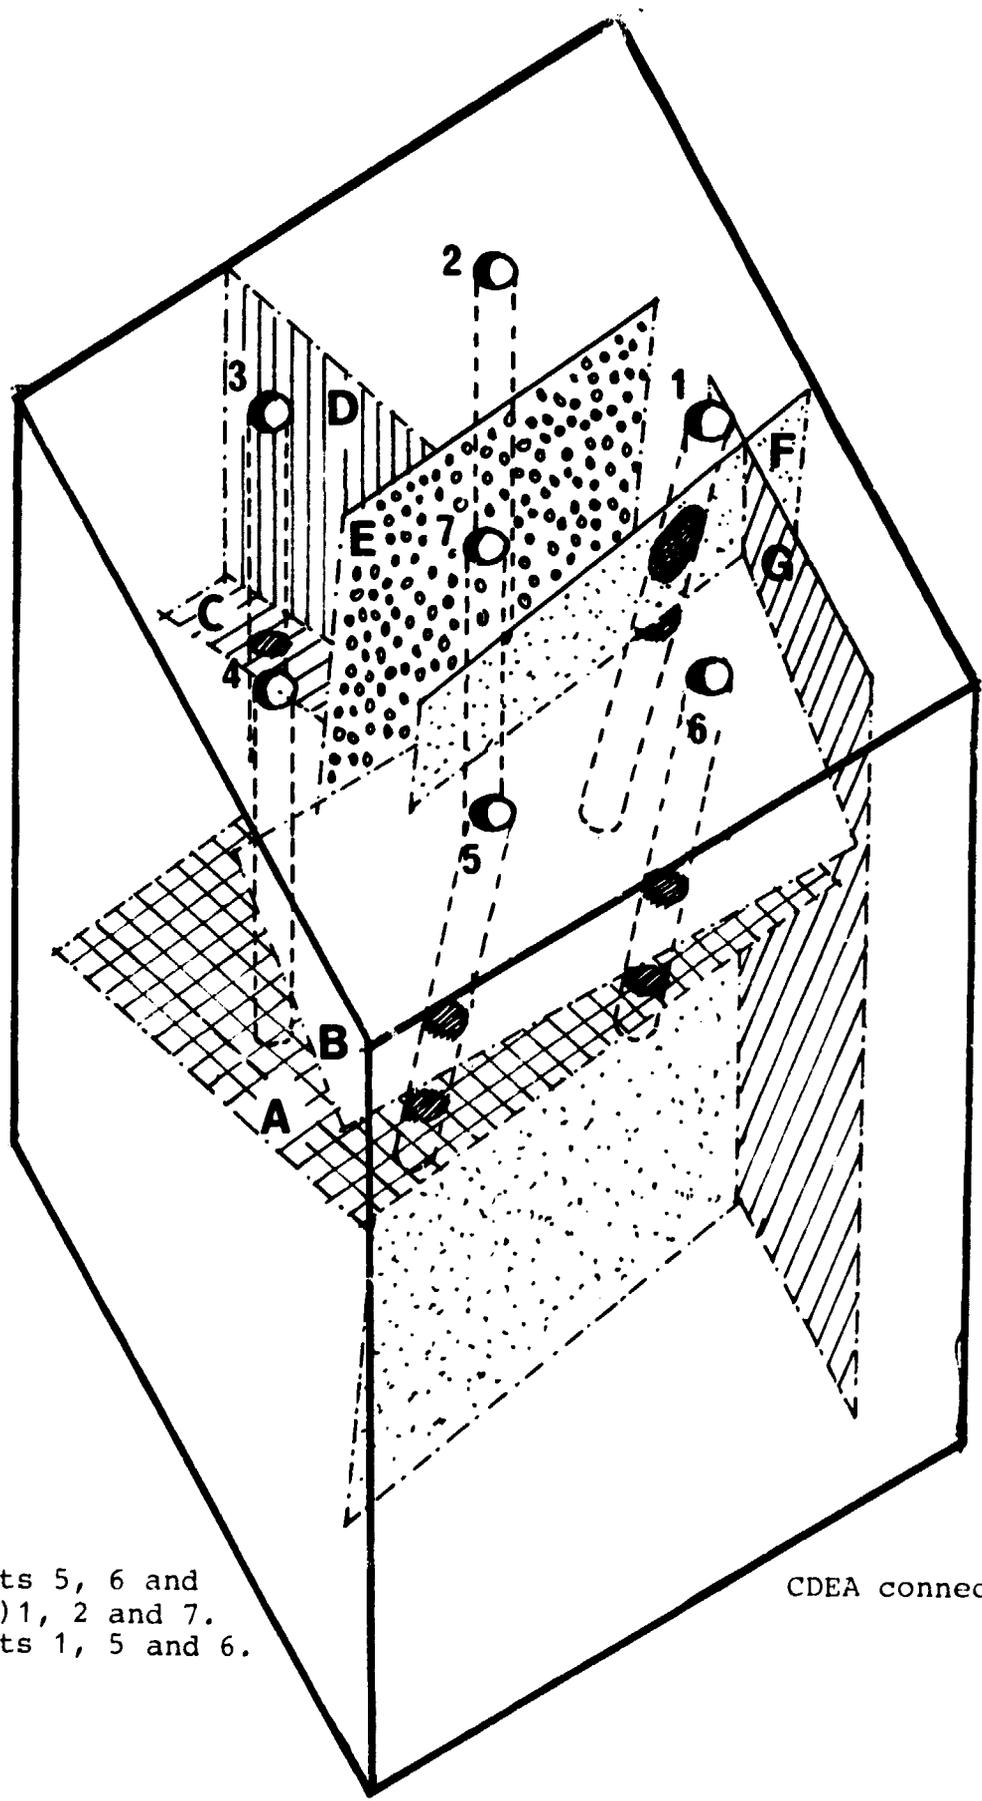

A connects 5, 6 and  
 (base of) 1, 2 and 7.  
 B connects 1, 5 and 6.

CDEA connects 3 and 7.

Fig. 6. Main joints.


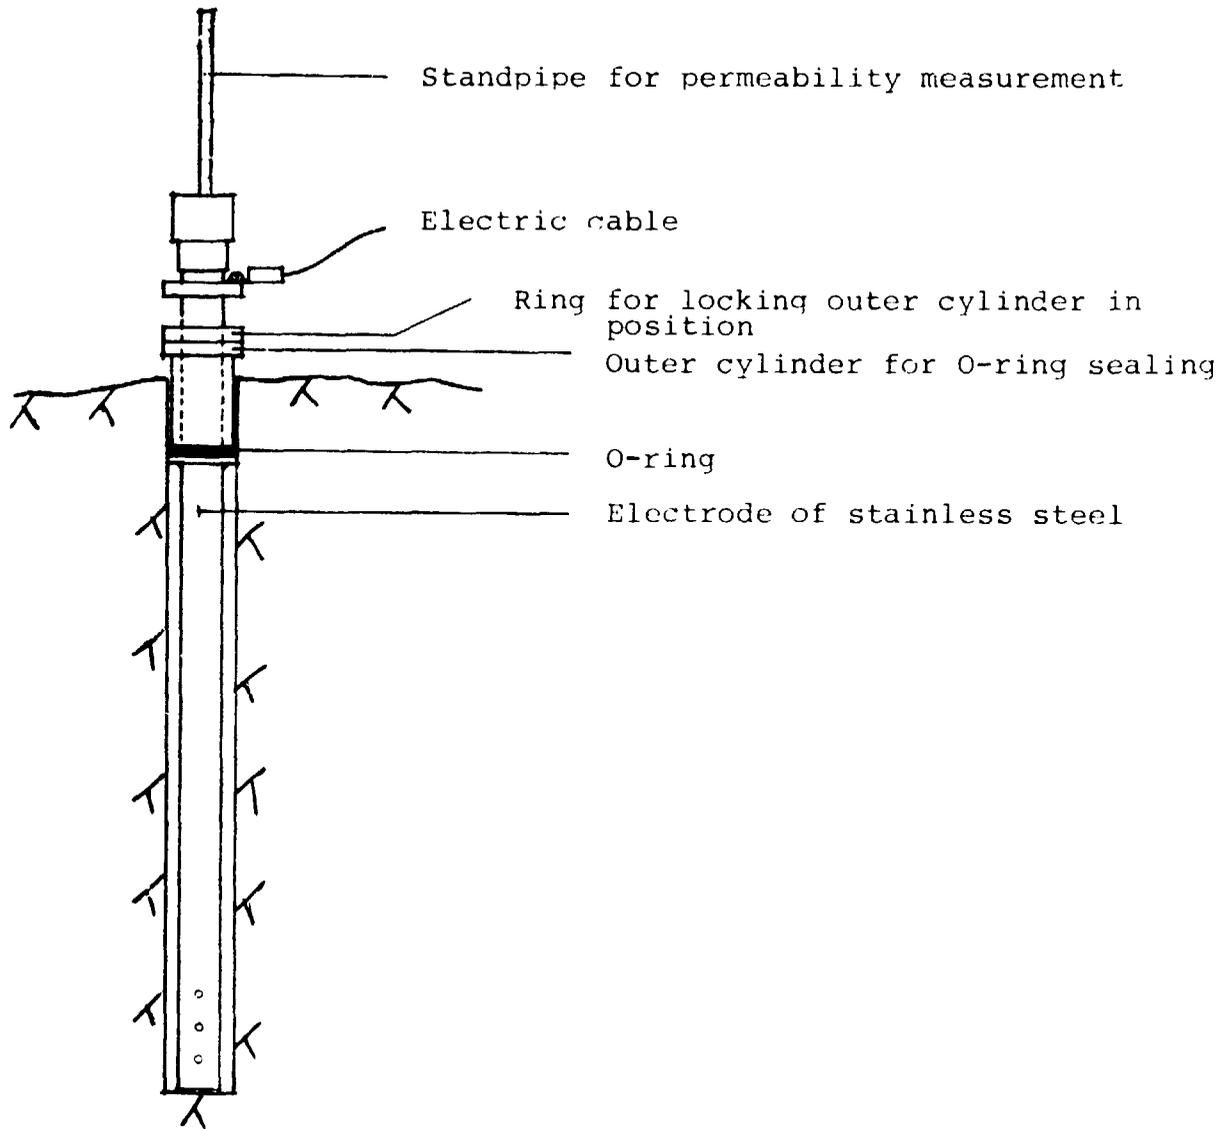


Fig. 7. Electrode.  
 Upper picture: Schematic drawing. Lower picture: Dismantled and mounted electrodes.

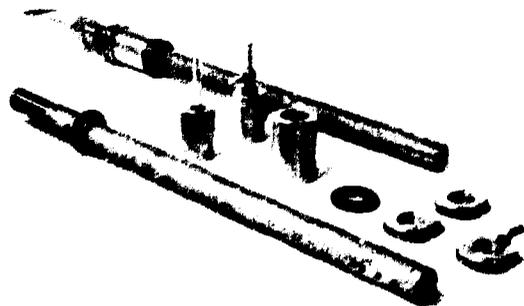

11

tion of the width and extension of the joints and from the injection work was about 500 ml. This means that the average porosity was about  $5 \cdot 10^{-4}$ .

In order to make possible both the over-pressure and the "electro-kinetic" injection as well as the permeability tests, electrodes of the type shown in Fig. 7 were mounted in the holes. Greased rubber O-rings were used for sealing purposes.

Some preliminary short-term pilot tests were used to find out the most suitable percolation technique and to test whether compressed air could be used for injection purposes. In order to restore the block after these pilot tests the holes and joints had to be washed by water under 500 kPa pressure before the main test started. This may have created some permanent joint opening.

#### Test program

The following program was chosen:

1. Percolation test of each individual hole (only one test at the time) using the falling head principle and starting with 1 m head (10 kPa water pressure at the upper end of each hole).<sup>1)</sup>
2. Injection of a bentonite slurry with 1000% water content (2% NaCl solution) by means of a specially designed, easily operated injection pump (Fig. 8). The pump house was filled with the slurry which was injected

---

<sup>1)</sup> Here, the preliminary tests came in by which some increase of the joint width may have been caused.

under a constant pressure of 1 MPa. After the injection of 350 ml, which took about 2 hours, the operation was stopped. A minor extrusion of water and bentonite suspension was observed along line I-I in Fig. 4 which indicates the presence of an irregular joint with connection to hole no. 7.



Fig. 8. Injection pump in operation.

3. Percolation test as in Paragraph 1 after thorough cleaning of the "deposition hole" no. 7. Samples of the water in holes no. 1-6 were first taken to find out whether montmorillonite had been transferred from hole no. 7.
4. Electro-kinetic treatment. The central, deposition hole was again filled with a 1000% water content (2% NaCl solution) bentonite slurry to which a small amount of a

gold sol was added. This substance formed positively charged particles of colloidal size which were thus adsorbed on negatively charged basal planes of montmorillonite particles. The intention was to mark the montmorillonite so that particles transferred by the electrical field from the central hole to the peripheral holes and transported out into joints could be identified by applying electron microscopy.

A 240 volt potential was then applied for 4 days, the electrode in the deposition hole (no.7) being cathode and all the other electrodes being anodes. The current decreased from 16-40 mA to 3-10 mA at the end of the treatment. It was initially about 35-40 mA for holes no. 1, 2, 5 and 6 while it was only about 16 mA for holes no. 3 and 4. This indicates a different degree of connection between the circumferential holes and the central hole. Thus, holes no. 3 and 4 seem to have little or no connection with hole no.7.

5. Percolation test as in Paragraph 1 after thorough cleaning of the deposition hole.
6. The block was split to expose the joints and to investigate them with reference to width and orientation and to their content of montmorillonite.

### Test results

#### Permeability

Ground water flow in rock takes place in continuous joints (rapid flow) and in continuous pore systems



(mainly incomplete grain contacts; slow flow) as shown by PUSCH, 1977. The large majority of the water flow takes place in one or two joints per unit volume and it is therefore hardly relevant to describe the circulation pattern by using flow nets for an assumed isotropic medium or by applying the term (average) permeability.

This was also obvious from some preliminary permeability tests which indicated a very complex joint pattern. They showed that the best way of describing the time-dependent clearance of the holes was to measure the time for clearance of each individual hole when the water level outside the block and within all the holes (except the one being tested) and all joints was the same (cf. Test program). It is true that this does not give any information as to where the water flows which means that the length of the water passage and, thus, the hydraulic gradient are not known. The coefficient of permeability can therefore not be used. For the present purpose the main thing was to find out the percolation rate before and after the various treatments. In the report, therefore, this rate is simply given in terms of the time required to dissipate 50 ml of water from each hole in a "falling head" test with 1 m head at the start of each test. A very rough estimate gives the value 2.0 for the hydraulic gradient at the test start.

The results of the percolation tests are given in Fig. 9, 10 and 11. They are commented as follows:



Hole no 1  
.....

The time for clearance of this hole before the treatments was about 12 minutes. The pressure-injected bentonite doubled this time. The most effective sealing was obviously produced by the electro-kinetic treatment by which the time was increased to 9 hours.

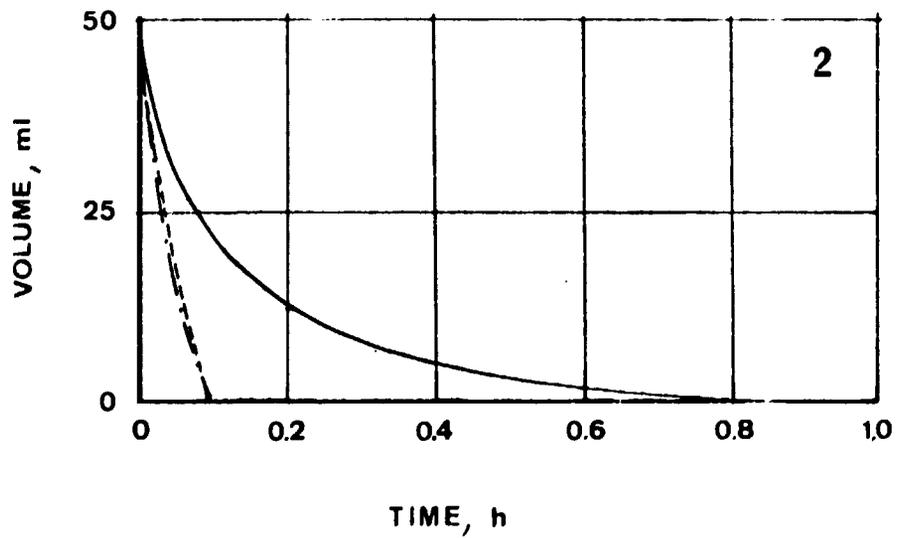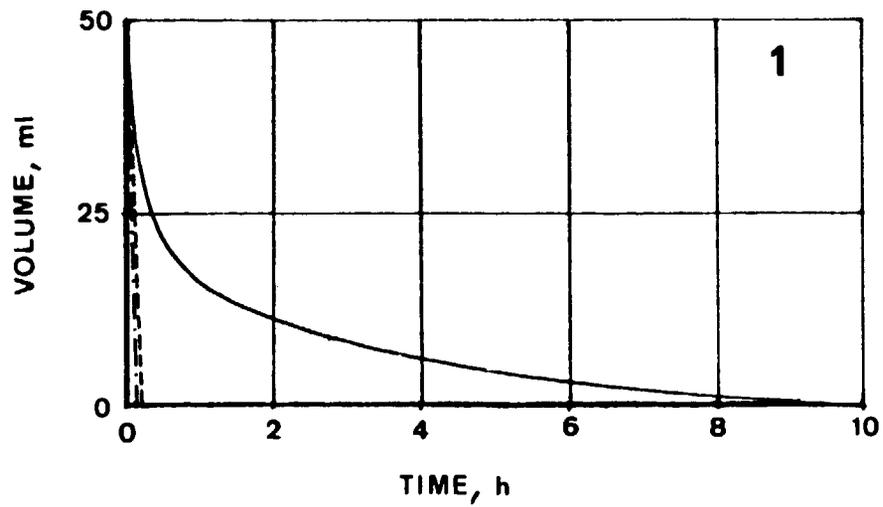



- Before treatment
- After pressure-injection
- After electro-kinetic treatment

Fig. 9. Percolation tests. Upper picture: Hole no 1.  
Lower picture: Hole no 2.

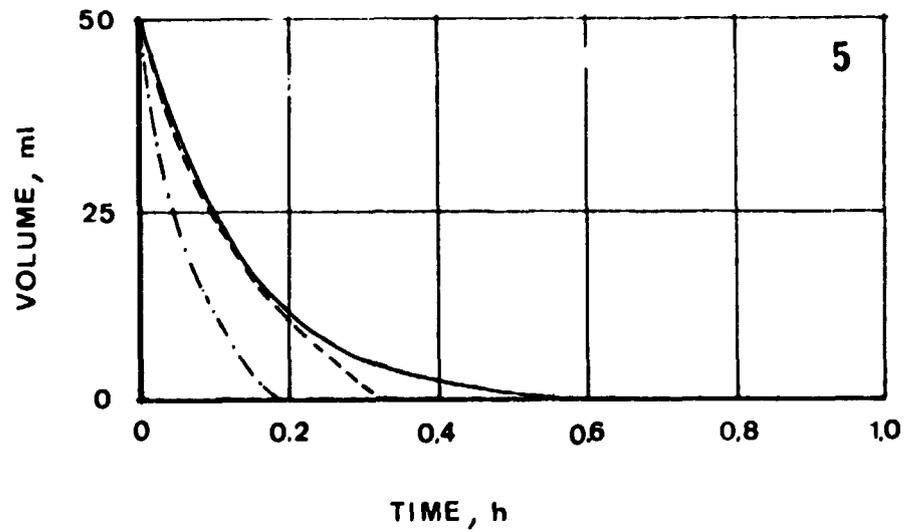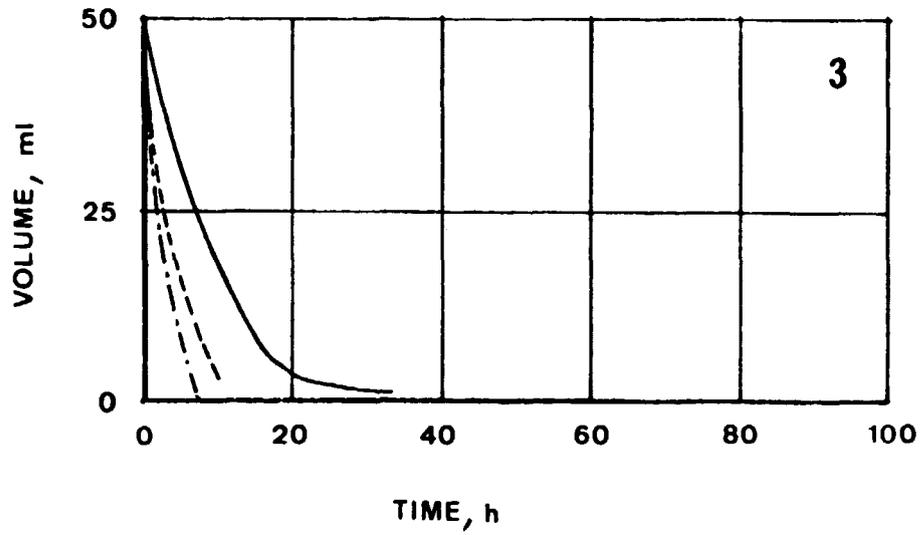

- ..... Before treatment
- After pressure-injection
- After electro-kinetic treatment

Fig. 10. Percolation tests. Upper picture: Hole no 3.  
Lower picture: Hole no 5.

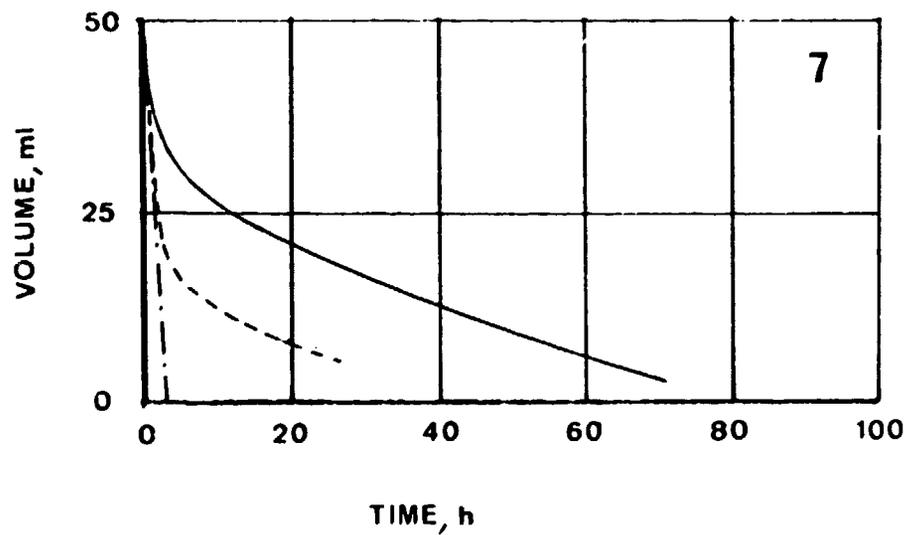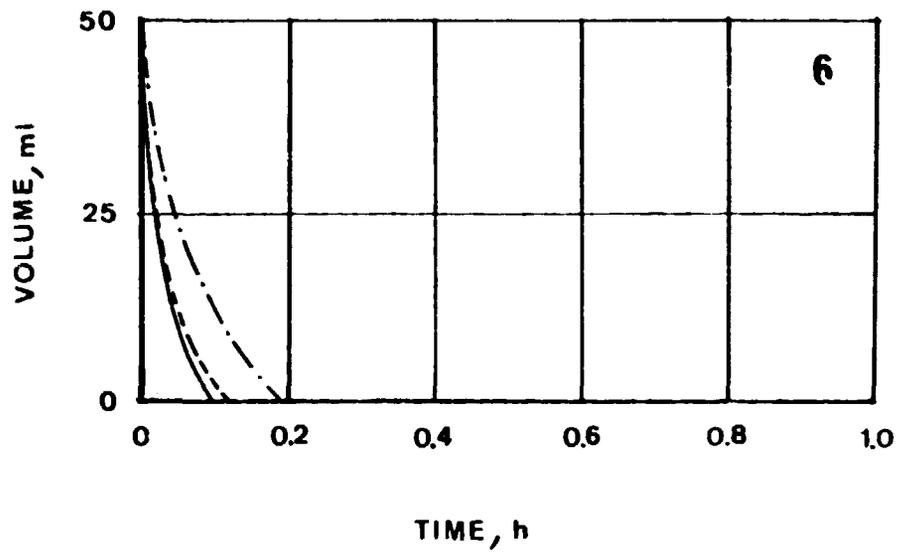

- ..... Before treatment
- After pressure-injection
- After electro-kinetic treatment

Fig. 11. Percolation tests. Upper picture: Hole no 6.  
Lower picture: Hole no 7.

Hole no 2  
.....

As in hole no 1 only the electro-kinetic treatment was really effective. It is obvious, however, that also after this treatment fairly large water passages extend from the hole. This is explained by Fig. 5 which shows a very open joint system at the lower third of the core. A largely prolonged electrical treatment should have improved the sealing.

Hole no 3  
.....

Same comment as for hole no. 2. The rather small effect is also due to the tortuous passage-way from hole no. 7.

Hole no 4  
.....

No water loss before or after the treatments could be observed.

Hole no 5  
.....

The bentonite injections were not especially successful. Again this is probably due to fairly large openings (cf. Fig. 5).

Hole no 6  
.....

We get the impression that the injections reduce the time for clearance in this test. As mentioned previously the preliminary tests with compressed air etc probably opened the frequent joints (cf. Fig. 5). Also, the injection of the bentonite gel by means of the injection pump may have caused an additional widening. This hole was situated close to the block surface so the pressure-injection may in fact have produced a local splitting of the rock and concrete.

Hole 7  
.....

This hole is the most interesting since it represents the deposition hole where the injections were performed. We see that the pressure-injection contributed considerably to the sealing of the rock (the test had to be finished after 27 hours) but that the electro-kinetic treatment was the most effective one.

We can conclude from these measurements that a pressure-injection in a bore hole from a tunnel floor should be much more effective than our test since the confining rock is pre-stressed and gives a very effective lateral support with less risk of joint opening. This requires, however, that no tensile stresses exist in the confining rock.

We also find that the electro-kinetic treatment works and that it gives a valuable contribution to the sealing. Very probably a more efficient technique can be developed, for instance by applying other potentials and by making a series of prolonged electrical treatments with pressure-injections in between.

It is interesting to see that while the pressure-injection transferred 350 ml bentonite suspension out into the joints (that is about 35 g of solid clay), the electrical treatment brought an additional amount of 15 g of solid clay out into these joints. The effect of the electrical treatment was of course also that of transporting pressure-injected clay further out into the joints. This is probably the major effect of this treatment.

It should be mentioned that the physical process which transfers minute negatively charged clay particles towards the positive anodes is accompanied by an electro-osmotic water transport towards the

cathode in the central hole. This was manifested by a slow rise of water in the standpipe of the cathode. The water column had risen to about 25 cm above the external water level when the test was stopped.

#### The transfer of clay

The splitting of the block (cf. Fig. 12) showed that the main joints in Fig. 6 contained a thin film of fairly stiff montmorillonite gel.

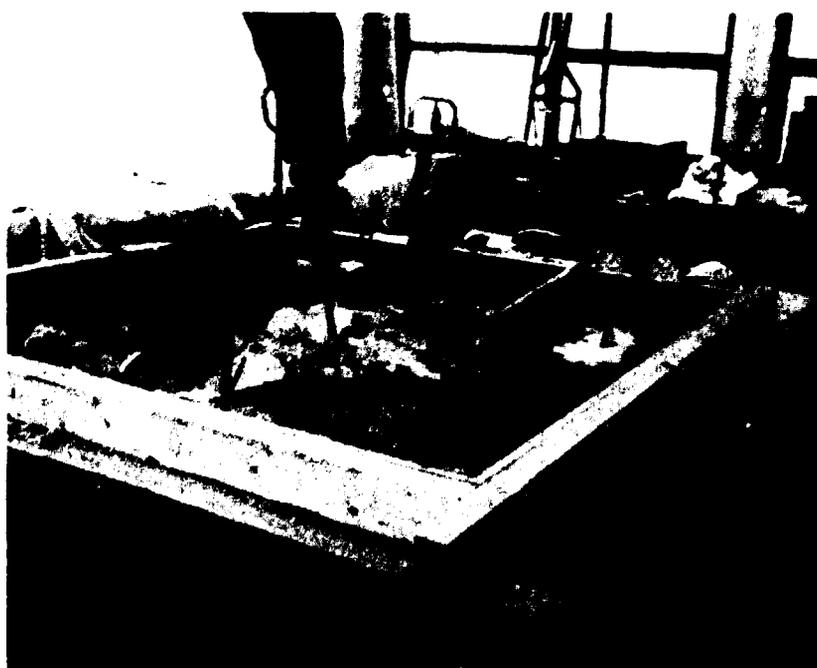


Fig. 12. Block splitting operation

The stiffness of the clay was much higher than that of gelled bentonite suspensions with a water content of 1000%. This means that consolidation occurred in course of the pressure-injection and/or that electro-phoresis increased the concentration of the gel. The latter process was observed in the previous glass-plate tests (PUSCH, 1977) and must

have contributed to the increased density.

Four representative samples were taken from various joints for mineral identification. The positions were (cf. Fig. 6): 1) Joint A between bore holes no. 1 and 2, 2) Joint B between bore holes no. 1 and 7 (passage way from base of hole no. 7 via joint A through hole no. 1 into joint B), 3) Joint B close to hole 5 (passage way from base of hole no. 7 via joint A through hole no. 5 into joint B, 4) Crossing of joints F and G 8 cm from top surface (passage way from base of hole no. 7 via joint A through joints F and G.

All the samples showed the presence of biotite and montmorillonite. The biotite originates from the rock while the montmorillonite is an evidence of the successful injection operations. This is because the rock is completely free from the natural weathering products. Fig. 13 is an example of the X-ray diffraction pattern for the sample from location 4. The conclusion of this study is that montmorillonite has been able to move a considerable distance despite the very tortuous passage-ways. This is most certainly an effect of the electro-kinetical treatment.

The water samples taken in the outer bore holes before and after the pressure-injection were investigated by means of electron microscopy. Due to the large amount of cations (the electrodes are dissolved as a result of the electrical treatment) and the low pH the montmorillonite flocculated immediately and settled to the base of the bore holes where it was mixed with rock flour. The electron micrographs are therefore difficult to interpret. Very probably, however, the frequently occurring extremely small and thin flakes represent this mineral (Fig. 14).

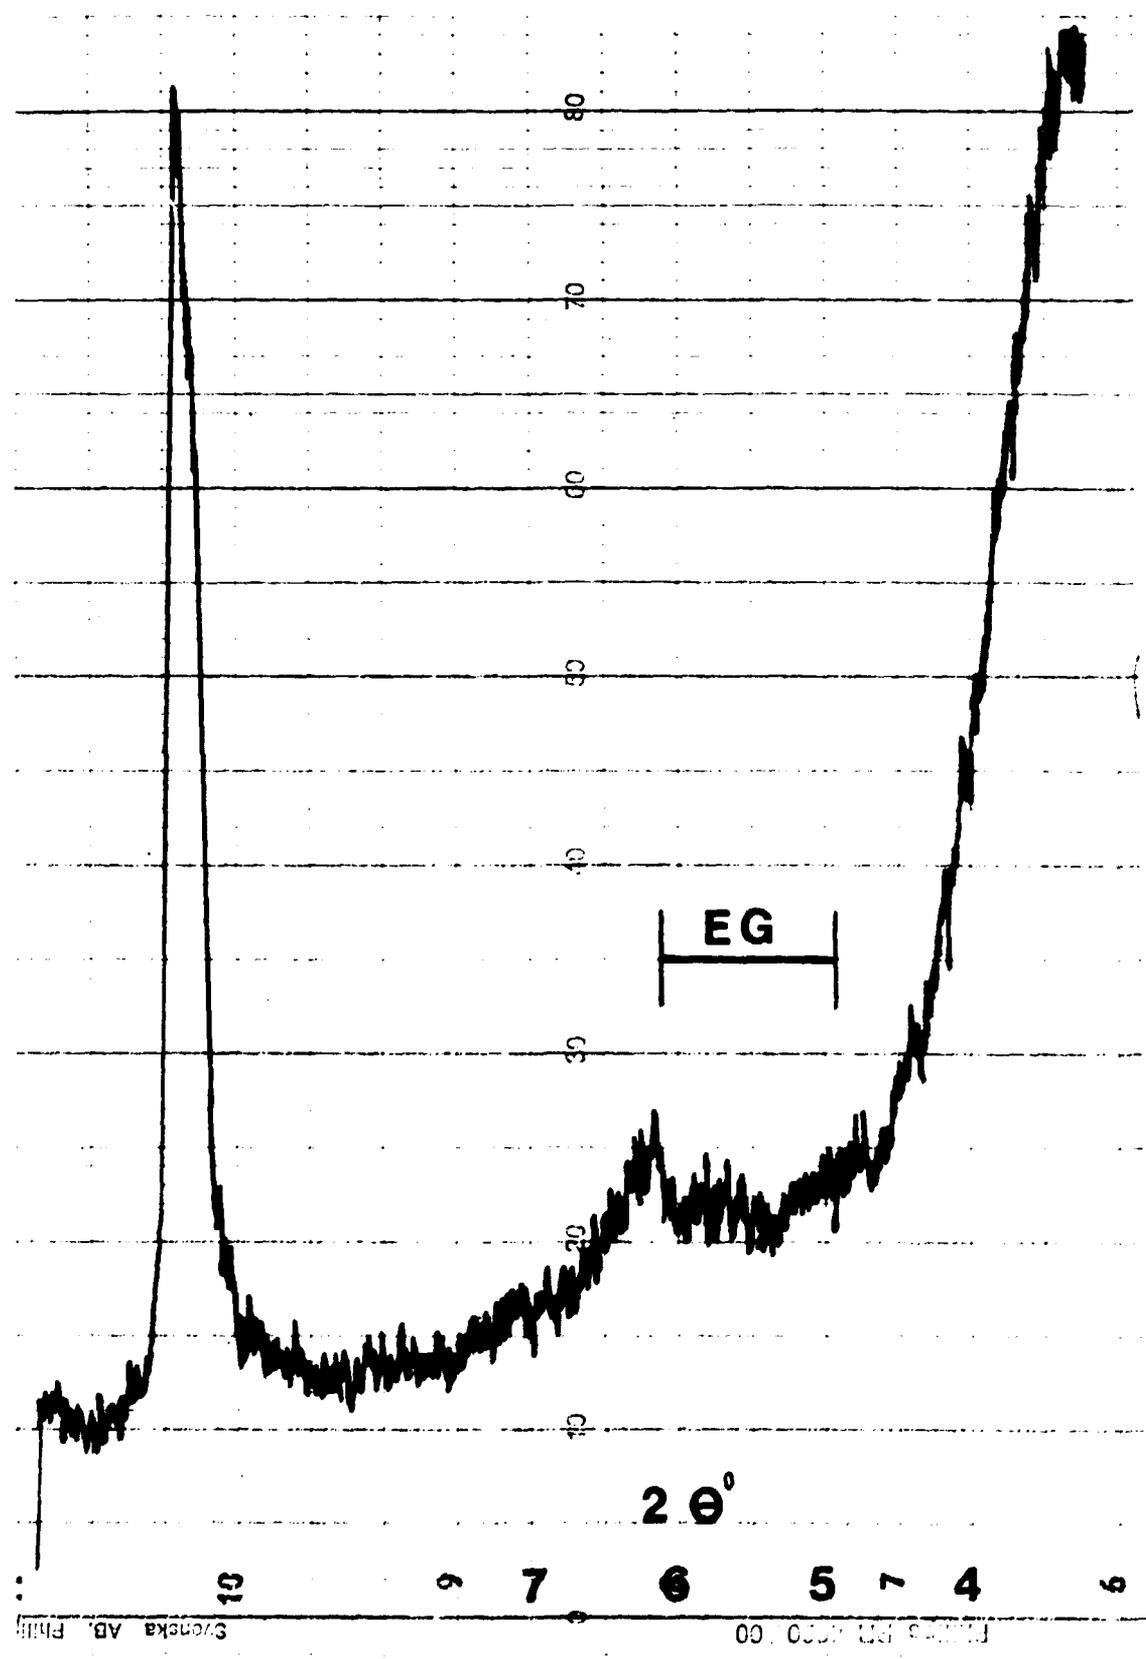


Fig. 13. X-ray diffraction pattern for sample from joint (no. 4). EG indicated the position to which the montmorillonite peak shifts after ethylene glycol treatment.

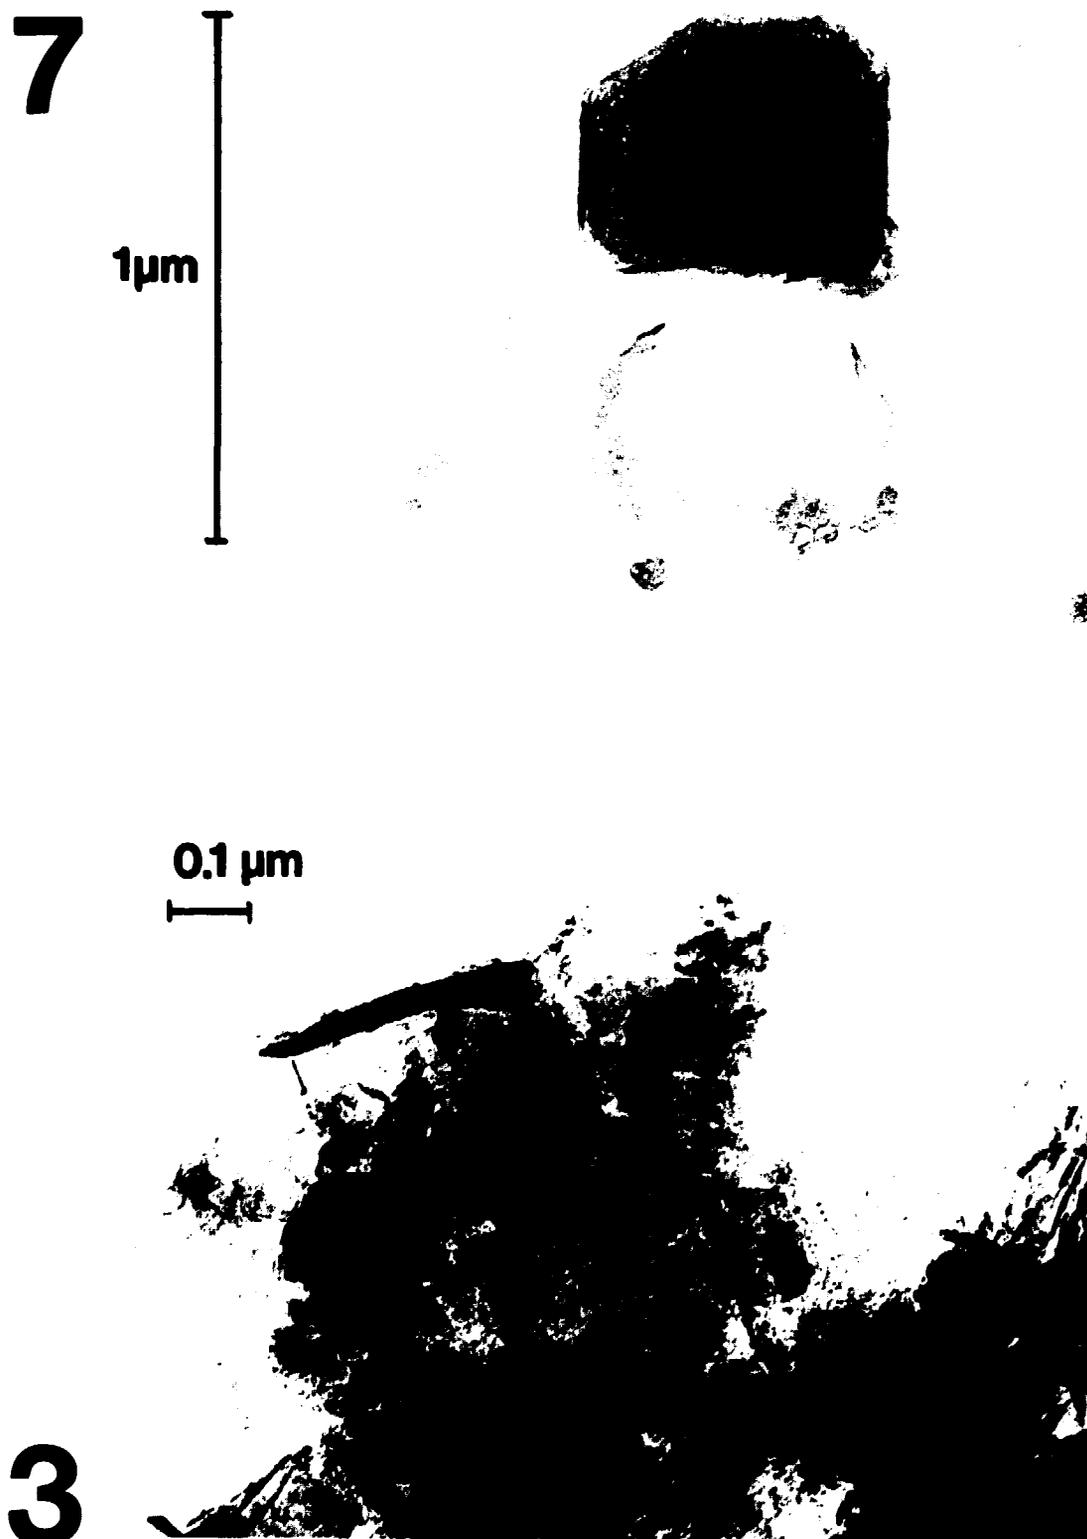


Fig. 14. Electron micrographs of samples from the bentonite slurry in bore hole 7 (for comparison) and from bore hole 3. The mineral assembly in the lower picture contains a number of small and very thin flakes.

Unfortunately, the colloidal gold particles could not be identified with certainty (cf. PUSCH, 1962 for technique description). It should be added that the montmorillonite in bore hole no. 3 had passed through such a tortuous joint system that the electrical field must have been the driving force.

### Conclusions

The main conclusions from this investigation are:

- ★ Pressure-injection of dilute bentonite suspensions ( $w \sim 1000$ ) has a sealing effect but the depth of extrusion of the suspension into rock joints is probably not large because of gelation of the strongly thixotropic substance.
- ★ Electro-kinetic injection of montmorillonite particles from a Na bentonite gel is a promising technique for rock tightening. It was found to be more effective than the pressure-injection. This was probably due to the electro-phoretic particle transport far out into the joints, directly from the central hole through the pressure-injected bentonite, and from the outer part of this bentonite.
- ★ Since the clay particles have a net negative electrical charge they are transported towards the anodes, which should therefore be arranged around the central hole with the cathode. In practice, the joint system of the rock mass is not known in detail when the location of the bore holes with anodes is to be decided. This is of no importance since the electrical field is con-

tinuous and transports clay particles towards the anodes in any kind of passages, provided that they begin at the deposition hole or are connected with joints which start there. A further testing of the technique on a larger scale should now be made.

### References

- PUSCH, R, 1962      Clay Particles, their size, shape and arrangement in relation to some important physical properties of clays. BFR, Handlingar nr 40.
- PUSCH, R, 1977      Bergspricktätning med bentonit.  
KBS Teknisk Rapport (Teknisk Rapport 10 in LuH's series).

## FÖRTECKNING ÖVER KBS TEKNISKA RAPPORTER

- 01 Källstyrkor i utbränt bränsle och högaktivt avfall från en PWR beräknade med ORIGEN  
Nils Kjellbert  
AB Atomenergi 77-04-05
- 02 PM angående värmeledningstal hos jordmaterial  
Sven Knutsson  
Roland Pusch  
Högskolan i Luleå 77-04-15
- 03 Deponering av högaktivt avfall i borrhål med buffertsubstans  
Arvid Jacobsson  
Roland Pusch  
Högskolan i Luleå 77-05-27
- 04 Deponering av högaktivt avfall i tunnlar med buffertsubstans  
Arvid Jacobsson  
Roland Pusch  
Högskolan i Luleå 77-06-01
- 05 Orienterande temperaturberäkningar för slutförvaring i berg av radioaktivt avfall, Rapport 1  
Roland Blomqvist  
AB Atomenergi 77-03-17
- 06 Groundwater movements around a repository, Phase 1, State of the art and detailed study plan  
Ulf Lindblom  
Hagconsult AB 77-02-28
- 07 Resteffekt studier för KBS  
Del 1 Litteraturgenomgång  
Del 2 Beräkningar  
Kim Ekberg  
Nils Kjellbert  
Göran Olsson  
AB Atomenergi 77-04-19
- 08 Utlakning av franskt, engelskt och kanadensiskt glas med högaktivt avfall  
Göran Blomqvist  
AB Atomenergi 77-05-20

- 09 Diffusion of soluble materials in a fluid filling a porous medium  
Hans Häggblom  
AB Atomenergi 77-03-24
- 10 Translation and development of the BNWL-Geosphere Model  
Bertil Grundfelt  
Kemakta Konsult AB 77-02-05
- 11 Utredning rörande titans lämplighet som korrosionshärdig kapsling för kärnbränsleavfall  
Sture Henriksson  
AB Atomenergi 77-04-18
- 12 Bedömning av egenskaper och funktion hos betong i samband med slutlig förvaring av kärnbränsleavfall i berg  
Sven G Bergström  
Göran Fagerlund  
Lars Rombén  
Cement- och Betonginstitutet 77-06-22
- 13 Urlakning av använt kärnbränsle (bestrålad uranoxid) vid direktdeponering  
Ragnar Gelin  
AB Atomenergi 77-06-08
- 14 Influence of cementation on the deformation properties of bentonite/quartz buffer substance  
Roland Pusch  
Högskolan i Luleå 77-06-20
- 15 Orienterande temperaturberäkningar för slutförvaring i berg av radioaktivt avfall  
Rapport 2  
Roland Blomquist  
AB Atomenergi 77-05-17
- 16 Översikt av utländska riskanalyser samt planer och projekt rörande slutförvaring  
Åke Hultgren  
AB Atomenergi augusti 1977
- 17 The gravity field in Fennoscandia and postglacial crustal movements  
Arne Bjerhammar  
Stockholm augusti 1977
- 18 Rörelser och instabilitet i den svenska berggrunden  
Nils-Axel Mörner  
Stockholms Universitet augusti 1977
- 19 Studier av neotektonisk aktivitet i mellersta och norra Sverige, flygbildsgenombgång och geofysisk tolkning av recenta förkastningar  
Robert Lagerbäck  
Herbert Henkel  
Sveriges Geologiska Undersökning september 1977

- 20 Tektonisk analys av södra Sverige, Vättern - Norra Skåne  
Kennert Röshoff  
Erik Lagerlund  
Lunds Universitet och Högskolan Luleå september 1977
- 21 Earthquakes of Sweden 1891 - 1957, 1963 - 1972  
Ota Kulhánek  
Rutger Wahlström  
Uppsala Universitet september 1977
- 22 The influence of rock movement on the stress/strain situation in tunnels or bore holes with radioactive constituents embedded in a bentonite/quartz buffer mass  
Roland Pusch  
Högskolan i Luleå 1977-08-22
- 23 Water uptake in a bentonite buffer mass  
A model study  
Roland Pusch  
Högskolan i Luleå 1977-08-22
- 24 Beräkning av utlakning av vissa fissionsprodukter och aktinider från en cylinder av franskt glas  
Göran Blomqvist  
AB Atomenergi 1977-07-27
- 25 Blekinge kustgnejs, Geologi och hydrogeologi  
Ingemar Larsson KTH  
Tom Lundgren SGI  
Ulf Wiklander SGU  
Stockholm, augusti 1977
- 26 Bedömning av risken för fördröjt brott i titan  
Kjell Pettersson  
AB Atomenergi 1977-08-25
- 27 A short review of the formation, stability and cementing properties of natural zeolites  
Arvid Jacobsson  
Högskolan i Luleå 1977-10-03
- 28 Värmeledningsförsök på buffertsubstans av bentonit/pitesilt  
Sven Knutsson  
Högskolan i Luleå 1977-09-20
- 29 Deformationer i sprickigt berg  
Ove Stephansson  
Högskolan i Luleå 1977-09-28
- 30 Retardation of escaping nuclides from a final depository  
Ivars Neretnieks  
Kungliga Tekniska Högskolan Stockholm 1977-09-14
- 31 Bedömning av korrosionsbeständigheten hos material avsedda för kapsling av kärnbränsleavfall. Lägesrapport 1977-09-27 samt kompletterande yttranden.  
Korrosionsinstitutet och dess referensgrupp

- 32 Long term mineralogical properties of bentonite/quartz  
buffer substance  
Preliminär rapport november 1977  
Slutrapport februari 1978  
Roland Pusch  
Arvid Jacobsson  
Högskolan i Luleå
- 33 Required physical and mechanical properties of buffer masses  
Roland Pusch  
Högskolan Luleå 1977-10-19
- 34 Tillverkning av bly-titan kapsel  
Folke Sandelin AB  
VBB  
ASEA-Kabel  
Institutet för metallforskning  
Stockholm november 1977
- 35 Project for the handling and storage of vitrified high-level  
waste  
Saint Gobain Techniques Nouvelles October, 1977
- 36 Sammansättning av grundvatten på större djup i granitisk  
berggrund  
Jan Rennerfelt  
Orrje & Co, Stockholm 1977-11-07
- 37 Hantering av buffertmaterial av bentonit och kvarts  
Hans Fagerström, VBB  
Björn Lundahl, Stabilator  
Stockholm oktober 1977
- 38 Utformning av bergrumsanläggningar  
Arne Finné, KBS  
Alf Engelbrektson, VBB  
Stockholm december 1977
- 39 Konstruktionsstudier, direktdeponering  
ASEA-ATOM  
VBB  
Västerås
- 40 Ekologisk transport och stråldoser från grundvattenburna  
radioaktiva ämnen  
Ronny Bergman  
Ulla Bergström  
Sverker Evans  
AB Atomenergi
- 41 Säkerhet och strålskydd inom kärnkraftområdet.  
Lagar, normer och bedömningsgrunder  
Christina Gyllander  
Siegfried F. Johnson  
Stig Rolandson  
AB Atomenergi och ASEA-ATOM

- 42 Säkerhet vid hantering, lagring och transport av använt kärnbränsle och förglasat högaktivt avfall  
Ann Margret Ericsson  
Kemakta november 1977
- 43 Transport av radioaktiva ämnen med grundvatten från ett bergförvar  
Bertil Grundfelt  
Kemakta november 1977
- 44 Beständighet hos borsilikatglas  
Tibor Lakatos  
Glasteknisk Utveckling AB
- 45 Beräkning av temperaturer i ett envånings slutförvar i berg för förglasat radioaktivt avfall Rapport 3  
Roland Blomquist  
AB Atomenergi 1977-10-19
- 46 Temperaturberäkningar för använt bränsle  
Taivo Tarandi  
VSB
- 47 Teoretiska studier av grundvattenrörelser  
Preliminär rapport oktober 1977  
Slutrapport februari 1978  
Lars Y Nilsson  
John Stokes  
Roger Thunvik  
Inst för kulturteknik KTH
- 48 The mechanical properties of the rocks in Stripa, Kråkemåla, Finnsjön and Blekinge  
Graham Swan  
Högskolan i Luleå 1977-09-14
- 49 Bergspänningsmätningar i Stripa gruva  
Hans Carlsson  
Högskolan i Luleå 1977-08-29
- 50 Lagningsförsök med högaktivt franskt glas i Studsvik  
Göran Blomqvist  
AB Atomenergi november 1977
- 51 Seismotectonic risk modelling for nuclear waste disposal in the Swedish bedrock  
F Ringdal  
H Gjöystdal  
E S Hysebye  
Royal Norwegian Council for scientific and industrial research
- 52 Calculations of nuclide migration in rock and porous media, penetrated by water  
H Häggblom  
AB Atomenergi 1977-09-14

- 53 Mätning av diffusionshastighet för silver i lera-sand-blandning  
Bert Allard  
Heino Kipatsi  
Chalmers tekniska högskola 1977-10-15
- 54 Groundwater movements around a repository
- 54:01 Geological and geotechnical conditions  
Håkan Stille  
Anthony Burgess  
Ulf E Lindblom  
Hagconsult AB september 1977
- 54:02 Thermal analyses  
Part 1 Conduction heat transfer  
Part 2 Advective heat transfer  
Joe L Ratigan  
Hagconsult AB september 1977
- 54:03 Regional groundwater flow analyses  
Part 1 Initial conditions  
Part 2 Long term residual conditions  
Anthony Burgess  
Hagconsult AB oktober 1977
- 54:04 Rock mechanics analyses  
Joe L Ratigan  
Hagconsult AB september 1977
- 54:05 Repository domain groundwater flow analyses  
Part 1 Permeability perturbations  
Part 2 Inflow to repository  
Part 3 Thermally induced flow  
Joe L Ratigan  
Anthony S Burgess  
Edward L Skiba  
Robin Charlwood
- 54:06 Final report  
Ulf Lindblom et al  
Hagconsult AB oktober 1977
- 55 Sorption av långlivade radionuklider i lera och berg  
Del 1 Bestämning av fördelningskoefficienter  
Del 2 Litteraturgenomgång  
Bert Allard  
Heino Kipatsi  
Jan Rydberg  
Chalmers tekniska högskola 1977-10-10
- 56 Radiolys av utfyllnadsmaterial  
Bert Allard  
Heino Kipatsi  
Jan Rydberg  
Chalmers tekniska högskola 1977-10-15

- 57 Stråldoser vid haveri under sjötransport av kärnbränsle  
Anders Appelgren  
Ulla Bergström  
Lennart Devell  
AB Atomenergi 1978-01-09
- 58 Strålrisker och högsta tillåtliga stråldoser för människan  
Gunnar Walinder  
FOA 4 november 1977
- 59 Tectonic lineaments in the Baltic from Gävle to Simrishamn  
Tom Flodén  
Stockholms Universitet 1977-12-15
- 60 Förarbeten för platsval, berggrundsundersökningar  
Sören Scherman
- Berggrundvattenförhållande i Finnsjöområdets nordöstra del  
Carl-Erik Klockars  
Ove Persson  
Sveriges Geologiska Undersökning januari 1978
- 61 Permeabilitetsbestämningar  
Anders Hult  
Gunnar Gidlund  
Ulf Thoregren
- Geofysisk borrhålmätning  
Kurt-Åke Magnusson  
Oscar Duran  
Sveriges Geologiska Undersökning januari 1978
- 62 Analyser och åldersbestämningar av grundvatten på stora djup  
Gunnar Gidlund  
Sveriges Geologiska Undersökning 1978-02-14
- 63 Geologisk och hydrogeologisk grunddokumentation av  
Stripa försöksstation  
Andrei Olkiewicz  
Kenth Hansson  
Karl-Erik Almén  
Gunnar Gidlund  
Sveriges Geologiska Undersökning februari 1978
- 64 Spänningsmätningar i Skandinavisk berggrund - förutsättningar,  
resultat och tolkning  
Sten G A Bergman  
Stockholm november 1977
- 65 Säkerhetsanalys av inkapslingsprocesser  
Göran Carleson  
AB Atomenergi 1978-01-27
- 66 Några synpunkter på mekanisk säkerhet hos kapsel för  
kärnbränsleavfall  
Fred Nilsson  
Kungl Tekniska Högskolan Stockholm februari 1978

- 67 Mätning av galvanisk korrosion mellan titan och bly samt mätning av titans korrosionspotential under  $\gamma$ -bestrålning. 3 st tekniska PM.  
Sture Henrikson  
Stefan Poturaj  
Maths Åsberg  
Derek Lewis  
AB Atomenergi januari-februari 1978
- 68 Degraderingsmekanismer vid bassänglagring och hantering av utbränt kraftreaktorbränsle  
Gunnar Vesterlund  
Torsten Olsson  
ASEA-ATOM 1978-01-18
- 69 A three-dimensional method for calculating the hydraulic gradient in porous and cracked media  
Hans Häggblom  
AB Atomenergi 1978-01-26
- 70 Lakning av bestrålat  $UO_2$ -bränsle  
Ulla-Britt Eklund  
Ronald Forsyth  
AB Atomenergi 1978-02-24
- 71 Bergspricktätning med bentonit  
Roland Pusch  
Högskolan i Luleå 1977-11-16
- 72 Värmeledningsförsök på buffertsubstans av kompakterad bentonit  
Sven Knutsson  
Högskolan i Luleå 1977-11-18
- 73 Self-injection of highly compacted bentonite into rock joints  
Roland Pusch  
Högskolan i Luleå 1978-02-25
- 74 Highly compacted Na bentonite as buffer substance  
Roland Pusch  
Högskolan i Luleå 1978-02-25
- 75 Small-scale bentonite injection test on rock  
Roland Pusch  
Högskolan i Luleå 1978-03-02
- 76 Experimental determination of the stress/strain situation in a sheared tunnel model with canister  
Roland Pusch  
Högskolan i Luleå 1978-03-02
- 77 Nuklidvandring från ett bergförvar för utbränt bränsle  
Bertil Grundfelt  
Kemakta konsult AB, Stockholm
- 78 Bedömning av radiolys i grundvatten  
Hilbert Christenssen  
AB Atomenergi 1978-02-17