

**NOTICE**  
 This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

Comp. 790327-840  
 SLAC-PUB-2271  
 March 1979  
 (A)

**AN ELECTRON BEAM SPECTRUM MONITOR USING SYNCHROTRON LIGHT\***

Daryl Reagan and Thomas E. Hostetler†

**Summary**

This instrument shows the positions, widths, and shapes of momentum spectra of SLAC beams. It uses synchrotron light produced when the beam is deflected by a magnet. Some of the light is focused on the face of an image splitter consisting of acrylic light pipes. The light pipes illuminate twelve photomultiplier tubes. Pulses from the PM tubes are integrated, multiplexed, and displayed on an oscilloscope. The resolution of the instrument is usually better than 0.2%. It has some advantages over the secondary emitter foil spectrum monitors (SEM's) currently in use at SLAC. It need never be put out of service to avoid disturbing the beam. It is as sensitive as the most sensitive SLAC SEM. (Its performance has been optimized for high-current beams; it can easily be made much more sensitive.) It provides information on a pulse-to-pulse basis and, with better cables, could indicate electron beam pulse shapes.

**Introduction**

When a relativistic electron beam is deflected by a magnet it produces synchrotron light.<sup>1,2,3</sup> In many places at SLAC the light is bright enough to be observable by means of closed circuit television even at very low beam current levels, and has been used for monitoring beam profiles (Ref. 4, p. 660; Ref. 5). SLAC electron and positron beam momentum spectra are ordinarily observed by means of secondary emission monitors (Ref. 4, p. 669). In passing through the aluminum foils of these instruments, the beam produces secondary electrons and X-rays. Since this contamination is intolerable for certain experiments performed in end station "A", a spectrum monitor has been developed which uses synchrotron light.

**The Light Source**

The monitor is installed some 10 m downstream of the B13 bending magnet in the SLAC "A" line (Ref. 4, p. 586). It makes use of a previously existing vacuum pipe junction which has been modified to serve as a viewing port. The port constrains the light path so that the central ray originates ~0.5 m upstream from the center of the magnet. In this location, the electron beam is dispersed horizontally by about 3.3 cm for a 1% spread in beam momentum and a monoenergetic beam would produce a spot 4 mm wide or less. The apparent horizontal angular size of the arc of an electron orbit in B13, as viewed from the direction of the monitor, is limited by the horizontal angular distribution of the synchrotron light. The width of the light cone which is produced by a small local increment of magnetic deflection may be estimated using Schwinger's equation II.31,<sup>1</sup> by integrating over  $x$  and taking averages of the resulting  $P(\psi, x, \omega)$  over intervals of  $2\pi$  in the function  $F$ , where

$$F = (1 - \beta^2 + \psi^2)^{3/2} (\pi R/\lambda)(x + x^3/3)$$

$\beta = v/c$ ,  $\psi$  is vertical angle,  $R$  is electron bending radius,  $\lambda$  is light wavelength,  $x = (1 - \beta^2 + \psi^2)^{-1/2} \chi$ , and  $\chi$  is horizontal angle, measured from the tangent to the electron orbit. For visible light ( $\lambda = 0.4 \mu\text{m}$ ), produced in B13 ( $R = 57 \text{ m}$ ), the averaged function  $\langle P(\psi, x, \omega) \rangle$  is peaked at  $x = 0$ , and half the light power

is confined within an angular interval  $\pm \chi_0$ , where

$$2\chi_0 \approx (4/\pi) \Gamma(1/3) (3\lambda/\pi R)^{1/3} \approx 6 \text{ mrad}$$

For  $|\chi| \gg \chi_0$  the intensity decreases as  $1/|\chi|^2$  (Ref. 6). If one compares the full widths containing half the visible light power, the horizontal ( $\chi$ ) width of the "light cone" is thus ~5 times the vertical ( $\psi$ ) width, which is  $\sim (3\lambda/4\pi R)^{1/3} \sim 1.2 \text{ mrad}$  (Ref. 2, p. 9). In B13 an electron orbit remains within  $\pm 3 \text{ mrad}$  of the line of sight to the monitor for ~.34 m of its path. The sagitta of this arc is ~0.3 mm, which corresponds to the distance between two electron orbits which differ in momentum by ~0.01%.

**The Light Path**

The light path (see Fig. 1) has been arranged to minimize the effects of radiation damage on the performance of the monitor. Some 9 meters downstream from the

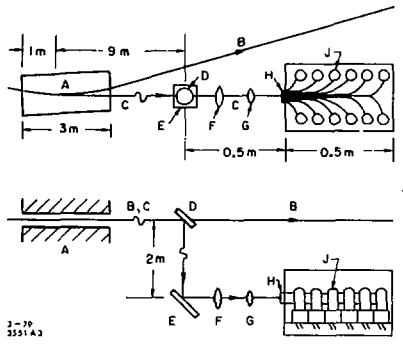


Fig. 1. Top and side views, not to scale. (A) bending magnet, (B) electron orbit, (C) light ray, (D) upper mirror, (E) lower mirror, (F) objective lens, (G) eyepiece or projection lens, (H) image splitter, (J) photomultiplier tube (typical).

source, an aluminumized copper mirror reflects the light down a 1.5 meter long vertical vacuum pipe from which the light emerges through a fused silica window. The light is then again reflected into a horizontal path by a first surface glass mirror.

An image of the light source is produced on the entrance face of the image splitter by a pair of positive lenses which are arranged in a manner similar to that used in making an image of the sun by eyepiece projection upon a screen with a small telescope or monocular. The 193 mm  $f/3.7$  primary lens makes a real image in space which is refocused upon the face of the image splitter by a 12 mm eyepiece lens. The system accommodates a 3.6% beam momentum spectrum interval which is ~12 cm wide at the light source, and appears to be ~4 cm wide at the face of the image splitter. Only a portion of an electron orbit is well focused. As has been indicated above, electrons radiate reduced amounts of light in the direction of the monitor as

\*Work supported by the Department of Energy under contract number EY-76-C-03-0515.  
 †Stanford Linear Accelerator Center, Stanford University, Stanford, California 94305.

**MASTER**

62B



Acknowledgments

T. Conway, K. Crook, L. Otts, K. M. Regan, B. Sukiennicki, and D. Walz have contributed to the development of this device.

References

1. J. Schwinger, Phys. Rev. 75, 1912 (1949).
2. R. A. Mack, "Spectral and Angular Distributions of Synchrotron Radiation, Cambridge Electron Accelerator report CEAL-1027 (1966).
3. K. R. Lea, Physics Letters 42C, 338 (1978). (This paper has a recent bibliography.)
4. R. Neal, editor, The Stanford Two-Mile Accelerator, New York, W. A. Benjamin, Inc., 1968.
5. A. P. Sabersky, IEEE Trans. Nucl. Sci. NS-20, No. 3, 638 (1973).
6. D. Reagan, unpublished notes.