

CONF-840802--14

PORTIONS OF THIS REPORT ARE ILLEGIBLE. It has been reproduced from the best available copy to permit the broadest possible availability.

Consolidated Fuel Reprocessing Program

CONF-840802--14

THE ADVANCEMENT OF REMOTE TECHNOLOGY:  
PAST PERSPECTIVES AND FUTURE PLANS

DE84 016710

M. J. Feldman, Fuel Recycle Division  
W. R. Hamel, Instrumentation and Controls Division  
Oak Ridge National Laboratory\*  
Oak Ridge, Tennessee 37831

Paper to be Presented

at

International Meeting on  
Fuel Reprocessing and Waste Management

August 26-29, 1984

Jackson, Wyoming

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

By acceptance of this article, the publisher or recipient acknowledges the U.S. Government's right to retain a nonexclusive, royalty-free license in and to any copyright covering the article.

\*Operated by Martin Marietta Energy Systems, Inc., for the U.S. Department of Energy.

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

THE ADVANCEMENT OF REMOTE SYSTEMS TECHNOLOGY:  
PAST PERSPECTIVES AND FUTURE PLANS\*

M. J. Feldman, Fuel Recycle Division  
W. R. Hamel, Instrumentation and Controls Division

Consolidated Fuel Reprocessing Program  
Oak Ridge National Laboratory  
Oak Ridge, Tennessee 37831, U.S.A.

ABSTRACT

In the Consolidated Fuel Reprocessing Program at the Oak Ridge National Laboratory, a comprehensive remote systems development program has existed for the past five years. The new remote technology under development is expected to significantly improve remote operations by extending the range of admissible remote tasks and increasing remote work efficiency. The motivation and justification for the program are discussed by surveying the 40 years of remote operating experience which exists and considering the essential features of various old and new philosophies which have been, or are being, used in remote engineering. A future direction based upon the Remotex concept is explained, and recent progress in the development of an advanced servomanipulator-based maintenance concept is summarized to show that a new generation of remote systems capability is feasible through advanced technology.

INTRODUCTION

In the Consolidated Fuel Reprocessing Program (CFRP) at the Oak Ridge National Laboratory (ORNL), a comprehensive remote system technology development effort has existed for the past five years. This effort was established to respond to the requirements of advanced nuclear fuel reprocessing. The Remote Control Engineering and Special Remote Systems tasks are major CFRP development activities and represent a major commitment to the realization of a new generation of remote handling technology. This new technology is expected to significantly improve remote operations by extending the range of admissible remote tasks and increasing remote work efficiency.

---

\* Research sponsored by the Office of Spent Fuel Management and Reprocessing Systems, U.S. Department of Energy, under Contract No. DE-AC05-84OR21400 with Martin Marietta Energy Systems, Inc.

This research is believed to represent the largest dedicated effort in the United States since the intensive program at Argonne National Laboratory in the 1950s and 1960s. The ORNL work encompasses a full range of activities from manipulators and television viewing through radiation-hardened electronics and remote tooling. The especially rapid advances of the 1970s and 1980s in the microelectronics and materials technologies provide the foundation for new remote systems. Although the ORNL work is driven by the special requirements of fuel reprocessing, most of the results are in fact generically applicable to remote operations in hazardous environments. The purpose of this paper is to discuss the ORNL advanced development program in regard to the history of remote technology, the basic philosophies that have been adopted, and its implications for future remote operations.

## PHILOSOPHY AND REMOTE ENGINEERING

The history of remote operations is confusing if one tries to place in chronological order the developments that have occurred and the lessons that have, or should have, been learned. The historical record reflects the fact that the evidence available was subjectively interpreted, and variables of compromise and expediency played a large part in the decisions made.

### General Discussion

The canyon-type defense plants and the Idaho Chemical Processing Plant (ICPP), both developed about 30 years ago, are based on different concepts, yet these different remote philosophies are used throughout the world today. Let's discuss some of the underlying factors that may be involved. As mentioned earlier, the Purex plants were designed for fully remote operations and maintenance under the most risky and adverse conditions one could envision. The decision to build a remotely repairable facility was an honest and insightful recognition of the probable difficulties to be encountered in a highly radioactive plant that was (1) based on new process technology, (2) being constructed at an incredible pace, and (3) of extreme national importance. The concept required the development of an entirely new technology. The remote handling development included the tooling concept, the shielded-cab operated crane, and the remote viewing system. In addition, basic elements for the remote replacement of process components required the development of the world's first remote fluid and electrical connectors, process component installation schemes, and so on. Recognizing that these plants represented an irrevocable commitment to these undeveloped concepts, one has to be awed by the foresight and "can do" perspective that decision-makers must have had. These men had certain positives in their favor also, such as extreme national priority and presumably unlimited funds.

The ICPP was designed in the late 1940s under the strong influence of the more conservative design practices used in the Oak Ridge Pilot Plant (Building 3019). This design approach was followed to minimize vulnerability to unknown, or unproven, technologies. The ICPP design addressed requirements involving smaller throughput, much more complex

head-end processing, and higher radiation levels than the defense plants. The canyon approach was not considered because of the successful operating experience that had been obtained with the contact maintained Oak Ridge Pilot Plant. The essence of the contact approach is to use human entrance prudently to accomplish repairs. Prudence in this connotation essentially means providing facility and process equipment designs which constrain background radiation levels, facilitate decontamination, and provide human access. The ICPP designers apparently were confident (assuming that funding was not a limitation) in their ability to achieve these provisions and saw no reason to use canyon-type remote handling concepts.

Our 40-year history teaches us that the confidence/complexity trade-off should go in the direction of fully remote operations. The canyon and remote cell paths have been more successful operationally and environmentally than contact systems. The authors agree with this interpretation of history, but there are a great many options to be considered with respect to fully remote operations. A key trade-off exists between the sophistication of the remote handling system features versus the design provisions that must be incorporated into the equipment to be repaired and operated. This trade-off has been prevalent in all of the remote cell-type facilities and until recently has been constrained by the technical limitations of electromechanical handling systems.

In principle, it should be possible to reduce the number of special design provisions (e.g., cone-head fasteners, access constraints) as the handling equipment capabilities are improved. This simply implies that as the remote manipulators and other handling equipment approach manlike performance, remote operations become similar (in efficiency) to contact operations. In the past, the limitations of the remote handling equipment eroded the human operator's ability to perform useful work.

The trade-off between design provisions and handling sophistication is associated with several parameters that are difficult to evaluate quantitatively. The first is cost impact. The facility and equipment design provisions necessary to accommodate the constraints of a specific handling system concept are expensive and large in number. Also, sophisticated manipulator-based remote systems are costly. Clearly, the use of more dexterous handling systems increases the range of possible work tasks. This in turn increases the probability that the overall facility can operate successfully in the face of unexpected problems. In conflict with this gain, sophisticated handling equipment also inherently increases unreliability, which can degrade plant availability.

A second comparison can be made in the area of design trade-offs. A characteristic of cells designed to permit contact maintenance following rigorous decontamination is the use of intervening shielding walls. This segmentation of the working area provides the option of limiting the decontamination activity to the area immediately surrounding the required work space. The initial trade-off made in implementing the potential for contact maintenance is the cost. The intervening shield walls are costly, as are the transfer capabilities

that must be included when barriers are used. In addition, the barriers require duplication of remote handling equipment.

For operations that involve low contamination factors, the segmented cell design is probably preferred. For those operations such as reprocessing, high-level waste handling, and destructive analysis of fuel, a design that allows for both in situ remote repair and an avenue for remote removal, decontamination, and the potential for contact maintenance is probably the most efficient.

A second significant design trade-off - that of the use of television viewing - requires further discussion. As a companion development to the master-slave manipulator (MSM), the high-density glass window was developed for remote viewing. A window and a pair of MSMs became a standard design attribute. Even in these designs, some consideration was being given to the television camera as a secondary viewing mechanism. With the consideration of large-volume operations, adequate viewing over the volume covered by the manipulation system is a major design problem. Shielded windows (at approximately \$2 per cubic inch of window) that adequately cover the work volume are questionable economically and also provide a relatively limited field of view. The high initial capital cost of windows for applications requiring, at best, infrequent use, provided impetus to utilize the inherent flexibility and mobility of the television camera.

Television viewing introduces important development considerations. The radiation resistance of television electronics, the transmission of signals, and the inherent problems of two-dimensional viewing must be considered in concepts replacing windows. No perfect solution exists, but the optimum decision favors the use of the television camera as the viewing mechanism.

It is within the bounds of these issues that the facilities of the future are being considered. Many of the supporting technologies that are fundamental to remote handling systems have expanded at literally explosive rates in the past ten years. Future approaches to remote operations depend on the same judgment issue that has governed decisions in the past. How much confidence should be placed in the increased technical complexity that is required to obtain the additional merits?

#### Remotex

In 1980, Feldman and White<sup>1</sup> proposed that it was time to improve remote operations in nuclear fuel reprocessing through the use of force-reflecting servomanipulators. This design approach has been called "Remotex" and essentially involves the replacement of electromechanical manipulators (EMMs) with servomanipulators and a greater reliance on closed-circuit television to accomplish remote viewing. These changes are expected to improve plant availability by reducing the time required to accomplish process repairs. The increased handling capabilities are also expected to substantially enhance recovery from unplanned events. Finally, the servomanipulator-based approach provides many of the basic features that will be required for ultimate facility decommissioning, which is now considered an integral

part of the design. The Remotex concept is designed to minimize contact maintenance by seeking a mechanized replacement for man in the radioactive environment. As shown in Fig. 1, humanly compatible speed

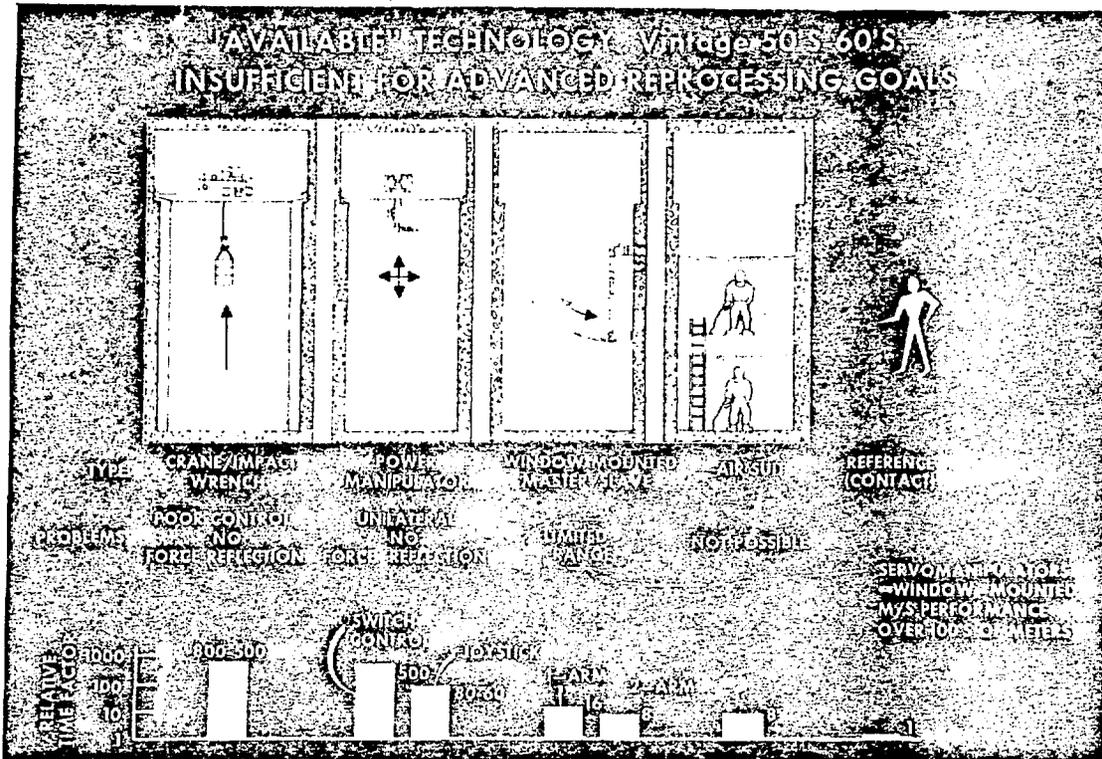


Fig. 1. Time efficiency for remote maintenance systems

of operation and sense of feel are very important in teleoperated-manipulator time efficiency.

The Remotex concept is expected to significantly improve the volumetric utilization of hot cell space by allowing MSM-level work task performance throughout canyon-sized cells. This introduces the additional challenge of large-scale mobility in a work environment, which is for the most part within the realm of existing transporter technology. Remotex should substantially increase the adaptability of future remote operations by providing manlike handling capabilities. This, as discussed in Ref. 1, will require the development and refinement of new technologies that have not yet been used in harsh radiation environments. In the next section, the future is discussed within the framework of the extensive development activities which exist at ORNL and are intended to make Remotex a reality.

## THE FUTURE

Recent advances in microelectronics, materials, and manufacturing techniques provide the basic ingredients essential for the successful development of the Remotex concept. These new technologies will facilitate the needed advances in remote handling systems. Many major technical hurdles remain, but it is difficult to imagine that they are any larger than those faced in remote development for the defense plants.

For about the last five years, advanced remote systems technology has been one of the largest development activities in the Department of Energy (DOE) CFRP at ORNL. Significant progress has been achieved, especially in the last two years, and early results continue to provide encouragement that Remotex is realistic. In the remainder of this section, the scope and near-term plans for the ORNL work will be summarized. Recent progress in specific areas is highlighted.

### Plans for the Next Generation

Remotex constitutes a next generation of remote systems technology built around the force-reflecting bilateral servomanipulator. Fundamental goals have been established to ensure that the requirements necessary for the Remotex concept are achieved. These goals relate to basic manipulator performance, reliability, and the general application of modern technology. As discussed earlier, good force reflection, similar to that achieved in MSMs, is essential for efficient teleoperation. Consequently, the performance of servomanipulators must approach (and hopefully exceed) that of MSMs while not restricting the distance between the master and slave arms. The new manipulators must not only provide improved performance, but must also be substantially more reliable than tape or cable-driven designs. MSMs generally exhibit mean time between failures (MTBFs) of 200 to 500 h. To obtain the plant operating efficiencies desired in the future, it is estimated that remote handling system components (e.g., manipulators) should have MTBFs in the range of thousands of hours. Finally, it is expected that the general application of modern technology, especially computers, will enhance work efficiency. Computer supervision for obstacle avoidance, operator control augmentation (i.e., assistance in tool alignment and control), and the judicious use of automation (i.e., robotic tool changing) are examples.

The scope of the development activities can be viewed effectively in terms of functional breakdown of the remote maintenance system concept. The system has been subdivided into the following seven subsystems:

1. Manipulator Subsystem - An entirely new type of remotely maintainable advanced servomanipulator (ASM) is being developed.

- o Mechanical Design - Emphasis is placed upon back-driveability and modularity using gear/torque tube power transmission. Refer to Ref. 2 for more detail.

o Control System Design - State-of-the-art distributed digital control concepts are used. The microprocessor-based systems facilitate many advanced features, such as advanced nonlinear servocontrol algorithms, robotic slave operation, on-line self-diagnosis, and automatic camera tracking.

o Position - Position bilateral servoloops are used to produce force reflection. See Ref. 3.

2. Remote Television Subsystem - Color, black and white normal resolution, high resolution, and 3-D projection systems, along with camera pointing and lighting placement, have been and are being investigated. The performance criteria include ease and speed with which operators can accomplish work tasks.

3. Control Station Subsystem (Man-Machine Interface) - This is a valuable innovation in manipulator system development. The application of the concepts and principles of ergonomics to the design of the master control station and the accomplishment of telepresence at the remote work place are fundamental. See Refs. 4 and 5 for more detail.

4. Transporter Subsystem - This is the mobility system for the manipulator-based work unit. Free-roving, floor-mounted, and suspended transfer systems have been studied. Current development is focusing on rigid and highly reliable overhead telescoping systems.

5. Signal Transmission Subsystem - State-of-the-art electronic systems are signal multiplexing techniques to dramatically reduce cable handling and shielding penetration requirements. Line-of-sight optical, free-space radio frequency, and confined radio frequency techniques have been studied. A digital laser optical system and a noncontact bus bar concept based upon an RF slotted transmission line configuration have been implemented.

6. Power Transmission Subsystem - Conventional solutions have been bus bars, festooned cables, and cable tracks. On-board power sources have been applied, and a hybrid battery - self-connecting hardware system has been studied. Noncontact inductive coupling for power transmission has been studied elsewhere and has limited potential applications.

7. Machine-Manipulator Interface - The equipment designed for remote operation is in part designed to be compatible with the manipulator capabilities and dexterity which are available. Flexibility and adaptability between the equipment to be maintained and the manipulator system is provided (in part) through the tooling designed for the maintenance operations. The tooling requires a significant design effort to ensure that it is compatible with the maintenance

requirements of the machine and that it also profitably uses the attributes of the manipulator system.

A unique feature of this development program is the balanced attention given to each of the elements of the overall system. Fig. 2 schematically depicts an overall integrated maintenance system

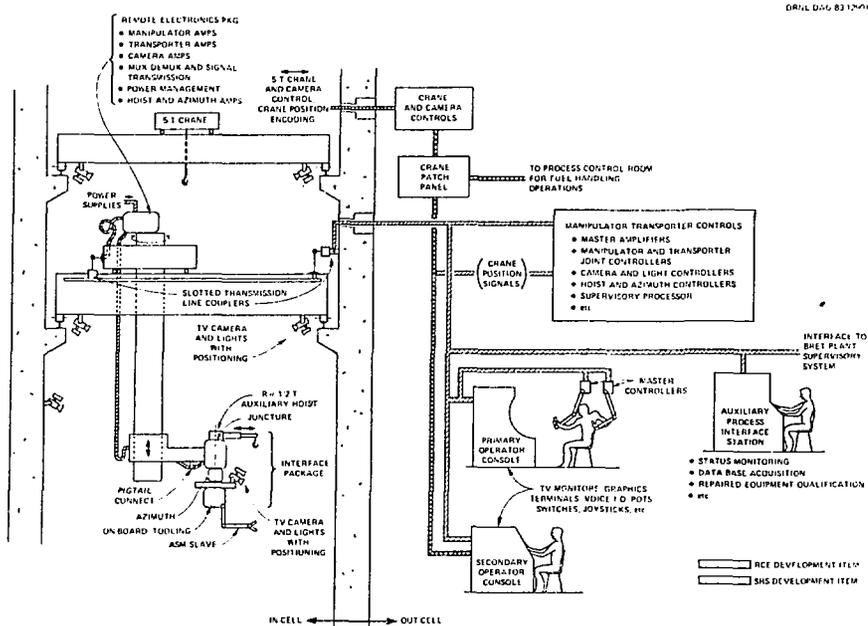


Fig. 2. Breeder Reprocessing Engineering Test maintenance system schematic

arrangement which is being considered in the current Breeder Reprocessing Engineering Test (BRET) project. One should note the incorporation of in-cell electronics to basically reduce cable-handling problems.<sup>3</sup> Specific development activities are addressing electronics radiation hardening and protection. Two advanced servomanipulator slave arms were built at ORNL and are currently in initial testing. Prototype units of the ASM have been built to gain experience necessary to accomplish the ultimate BRET procurement. A major effort will be mounted to establish viable commercial sources for the necessary subsystems.

### Recent Progress

Important results have been accomplished which fortify the belief that the advantages of servomanipulator-based maintenance are real and can be developed for use in very large hot cells. The Remote Systems Development Facility (RSDF) has been used to evaluate a number of underlying equipment and software concepts, as well as human factors experimentation. The RSDF, shown in Fig. 3, incorporates a dual set of TOS SM-229 servomanipulators which are on loan to ORNL-CFRP from the Princeton Plasma Physics Laboratory. The facility has been used to

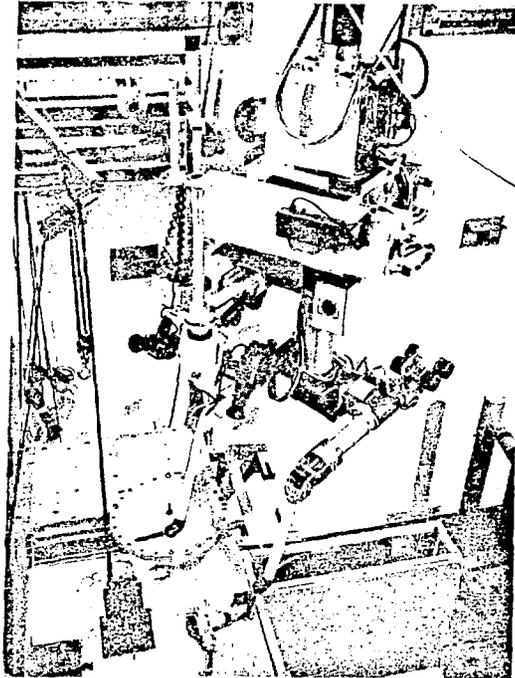


Fig. 3. RSDF: In-cell remote handling/viewing system

evaluate signal transmission using a slotted transmission line-coupler, computerized obstacle avoidance, automatic TV camera tracking,<sup>6</sup> and limited robotic slave functions. The RSDF has also been used extensively in human factors evaluation of camera-viewing issues. An important off-shoot of these experiments was a systematic quantification of the time efficiency of servomanipulator-based operation with TV viewing.<sup>7</sup> As shown in Table 1, the RSDF system achieved a time ratio

Table 1. Relative time ratios for manipulator use based on task characteristics and experienced and inexperienced operators

Task Characteristics	Operator Relative Time Ratios	
	Experienced	Inexperienced
Pure manipulator tasks	8.3	12
<90% manipulator use*	13.0	27
<70% manipulator use*	23.0	39

\* These involve increasing use of the overhead transporter and other auxiliary equipment

of 8.3:1 for a predominantly manipulator task. This compares amazingly well with 8:1 usually recognized for MSMs with shielded-window viewing. This result verifies (in at least one case) that servomanipulator performance can match hot lab MSM performance.

The procurement of the Central Research Laboratories (CRL) Model M2 Maintenance System was another very important activity. The M2 has been installed in the CFRP Remote Operations and Maintenance Demonstration Facility (ROMD) where it has been evaluated and used in full-scale mockup testing (see Fig. 4). The M2 was a joint development between CRL

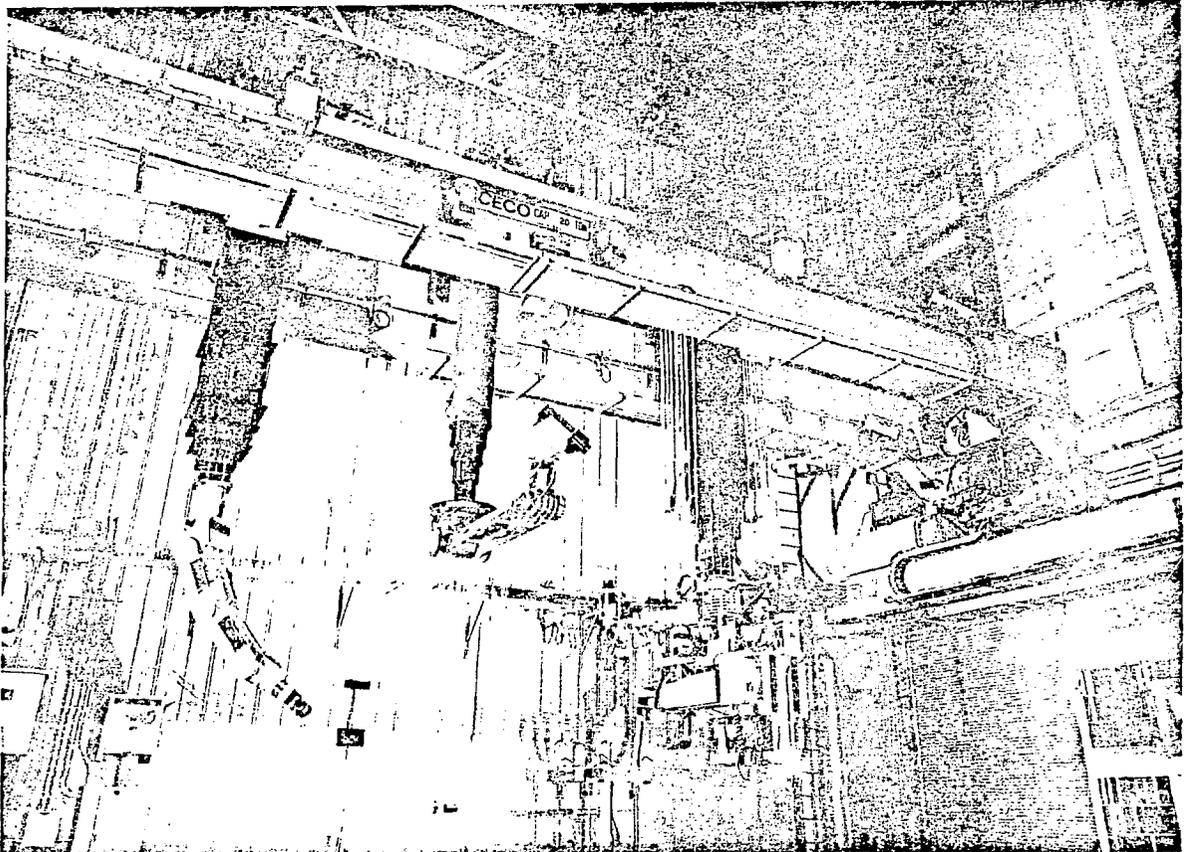


Fig. 4. M2 maintenance system

and ORNL in which ORNL developed the all-digital control electronics system. The M2 is the first successful demonstration of an all-digital bilateral servomanipulator. The digital controls<sup>6</sup> have significantly improved operating training through the menu-driven touch-screen control interface and have permitted the M2 to be "tuned" to provide friction and force-reflection properties exceeding typical MSMs even though its peak capacity is 45 kg per arm. The overall M2 system is described in Ref. 9.

The remotely maintainable advanced servomanipulator (ASM) is the most technically challenging, yet critical, development activity being pursued. The ASM design<sup>2</sup> is based on the use of gears and torque tubes

to replace metal tapes in the drive train. The geared approach facilitates modularity so that the slave arms can be repaired in situ by other ASMs via spare module replacement. The geared approach also increases reliability, but at the expense of increased inertia, friction, and backlash, all of which tend to degrade teleoperation. The first units of the ASM have been fabricated, and the isometric view given in Fig. 5 shows how the arm will be modularized. A test stand

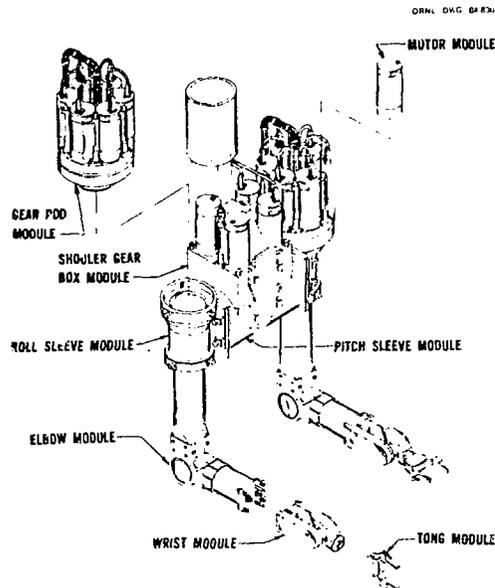


Fig. 5. Advanced servomanipulator modularization

that simulates the wrist roll axis of the ASM has been used in basic studies of motor characteristics, of gearing nonlinearities, and for control algorithm development. At this time, we remain optimistic that the overall performance of the ASM can be near that of the MSMs in spite of the gear train effects. A new control system architecture based on the Motorola MC68000 16-bit microprocessor has been developed to provide an improved update to the M2 design.<sup>3</sup> The new control system capabilities and an optimized (having minimum inertia) master controller design<sup>5</sup> (being developed by the Jet Propulsion Laboratory for ORNL) will provide important performance gains which are expected to offset the deleterious gearing effects. Work has begun on the advanced integrated operator station,<sup>4</sup> which incorporates ergonomically designed colorgraphics displays and standard remote TV viewing monitors.

#### SUMMARY

History shows that the design trade-offs associated with remote operations involve as much judgment as rationality. The record for nearly 30 years of operation shows that fully remote designs cost more initially, but in the long run pay off in terms of facility operating

efficiency and radiation exposure. The Remotex concept is a recognition of this observation coupled with the goal of applying new technology to remote systems. A major development program has been established in the CFRP at ORNL to accomplish this very thing. Five years of advanced development effort and early results fortify the belief that this is the proper approach for a new generation of remote technology that is practical and achievable.

#### REFERENCES

1. M. J. FELDMAN and J. R. WHITE, "Remotex - A New Concept for Efficient Remote Operations and Maintenance in Nuclear Fuel Reprocessing," ANS National Topical Meeting on Fuel Cycles For The '80s, Gatlinburg, Tenn., October 1980.
2. D. KUBAN and H. MARTIN, "An Advanced Remotely Maintainable Servomanipulator Concept," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
3. H. L. MARTIN et al, "Control and Electronic Subsystems for the Advanced Servomanipulator," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
4. M. M. CLARKE and J. KRIEFELDT, "Elements of an Advanced Integrated Operator Control Station," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
5. D. P. KUBAN and G. S. PERKINS, "Dual Arm Master Controller Concept," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
6. R. S. STOUGHTON, "Automatic Camera Tracking for Remote Manipulators," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
7. M. M. CLARKE et al, "Human Factors in Remote Control Engineering Development Activities," Proc. of 31st Conf. Remote Syst. Technol., Vol. 1, Summer 1983, Detroit (in press).
8. F. E. SATTERLEE et al, "Control Software Architecture and Operating Modes of the Model M2 Maintenance System," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.
9. J. N. HERNDON et al, "The State-of-the-Art Model M-2 Maintenance System," ANS Topical Meeting on Robotics and Remote Handling in Hazardous Environments, Gatlinburg, Tenn., April 1984.