


7

SU8108692



**ОБЪЕДИНЕННЫЙ
ИНСТИТУТ
ЯДЕРНЫХ
ИССЛЕДОВАНИЙ
ДУБНА**

E9-81-54

S.B.Vorozhtsov, V.P.Dmitrievsky

**CALCULATION
OF BEAM INJECTION AND MODES
OF ACCELERATION
FOR THE JINR PHASOTRON**

Submitted to IX^{*} Conference on Charged Particle
Accelerators (Washington, 1981)

1981

Ворожцов С.Б., Дмитриевский В.П.

E9-81-54

Расчет инжекции и режимов ускорения пучка
для сильноточного фазотрона ОИЯИ

Работа посвящена анализу движения частиц от инжекции до конечного радиуса сильноточного фазотрона ОИЯИ. Целью работы является оценка интенсивности и качества пучка частиц и факторов, влияющих на пучок. Расчеты проводились по программам для ЭВМ с учетом радиально-фазового и аксиального движения частиц, а также коллективных взаимодействий в пучке. Динамические процессы в течение первых оборотов частиц учитывались путем интегрирования полных уравнений движения пучка. В результате была подтверждена ранее сделанная оценка интенсивности пучка величиной 40-45 мкА, получены допуски на структуру магнитного поля в зоне первого фазового колебания, сделаны уточнения требуемых зависимостей амплитуды ускоряющего напряжения от времени.

Работа выполнена в Лаборатории ядерных проблем ОИЯИ.

Препринт Объединенного института ядерных исследований. Дубна 1981

Vorozhtsov S.B., Dmitrievsky V.P.

E9-81-54

Calculation of Beam Injection and Modes
of Acceleration for the JINR Phasotron

The analysis of particle motion from the injection region up to the final radius of the JINR high current phasotron is given. The purpose of the investigation was the appreciation of the beam quality and intensity and of the factors, influencing the beam behaviour. Synchrotron and betatron radial and vertical particle motion as well as space charge repulsion were included into the computer code for beam investigation. The integration of a complete set of equations of beam motion was used for the study of dynamical processes at the first turns of particles. As a result, the beam intensity earlier appreciation of 40-45 μ A was confirmed, magnetic field tolerances in the first phase oscillation region were obtained and the required time dependences of acceleration voltage amplitude were refined.

The investigation has been performed at the Laboratory of Nuclear Problems, JINR.

Preprint of the Joint Institute for Nuclear Research. Dubna 1981

INTRODUCTION

The JINR synchrocyclotron for proton energy of 680 MeV was shut down for reconstruction work in 1979. The purpose of this reconstruction is the creation of a high current phasotron with spatial variation of magnetic field. The accelerated beam behaviour together with different acceleration modes of the facility is investigated through computer simulation during the first phase oscillation. As a result, magnetic field tolerances are obtained.

INJECTION

The beam motion from the ion source up to the stationary acceleration mode was calculated using the computer code THOUR^{1/} modified for a high current phasotron. The accelerated beam intensity for the main variant of central electrodes geometry was estimated with taking into account synchrotron and betatron radial and vertical particle motion as well as space charge repulsion in the beam. When the extracted ion source current was as high as 100 (mA) the beam intensity after the

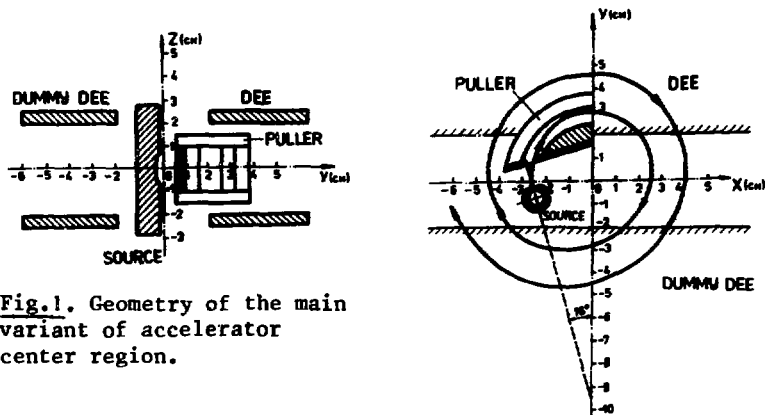


Fig. 1. Geometry of the main variant of accelerator center region.

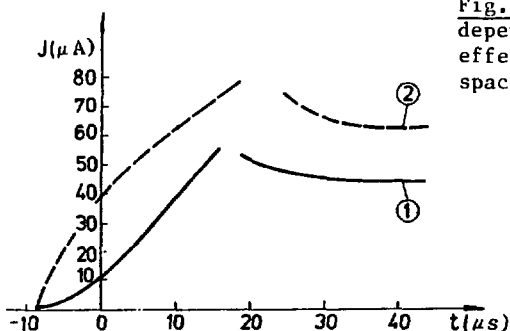


Fig.2. Beam intensity time dependence. 1 - space charge effect included, 2 - without space charge.

first phase oscillation was about 40-45 μA (Fig.2) with dee frequency performance, measured at a full-scale RF-system prototype. The dee acceleration voltage was assumed to be 40-50 kV.

The above mentioned intensity value could be obtained at the final radius of acceleration (270 cm) when there are no beam losses due to transversal instability or deviation of the beam from the midplane in the radius ranging from 60 to 270 cm. Even with the installed puller the proper electrical field of the beam starts to affect the value of the charge captured into the separatrix of the first phase oscillation (effect of the order of 30-35%). But the main losses of the beam are due to insufficient axial focussing in the radius range of 5-15 cm. 9% of the total beam, passing through the puller, are retained for normal acceleration. Axial motion losses are 58%; return to the center, 33%. Only particles with start phases of $(-29^\circ) \div (-1^\circ)$ are captured at the stable mode of acceleration. The start phases range of particles, passing through the puller, was a bit wider than the above-mentioned one. Injection time was 23 μs with frequency modulation rate of 543 Hz.

MAGNETIC FIELD PERTURBATION EFFECT ON THE BEAM

A calculation taking into account a space charge requires a considerable amount of computer time, that is why the field perturbation effects have been estimated excluding collective particle interaction. Mean field perturbations lead to the instability of particle phase motion and change the frequency of axial oscillations. Figure 3 shows beam intensity performance for the mean field deviation of the form:

$$\Delta \bar{B}(R) = \Delta \bar{B}_m \frac{R_0^2}{R_0^2 + R^2} \cos\left(\frac{2\pi}{L} R\right).$$

Curve 1 corresponds to $R_0 = L = 20$ cm, curve 2 corresponds to parameter values $R_0 = 5$ cm, $L = 50$ cm. It can be seen that

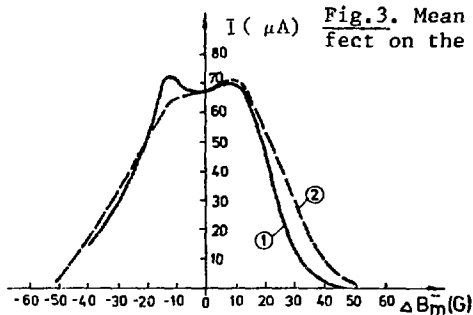


Fig. 3. Mean field perturbation effect on the beam intensity.

for $|\Delta \bar{B}_m| < 10$ G beam intensity is approximately constant. Betatron radial oscillations in the center of accelerator are affected by integral ($Q_R=1$), half-integral ($2Q_R=2$) and fourth-integral ($4Q_R=4$)

resonances. An integral resonance, driven by the first harmonics of the magnetic field, is the most dangerous one. The beam behaviour analysis by the Bogolubov method^{3/} showed that for 3.5 cm radial amplitude spectra limitation it is necessary to keep the first harmonics amplitude smaller than 4G in the resonance region of $(4-30) \text{ cm}^4$. Mean radial component of the magnetic field \bar{B}_R is the most dangerous as far as the beam center deviation from midplane is concerned. According to analytical predictions for the given beam deviation $|\bar{Z}| < 4 \text{ mm}$, in the region $20 \text{ cm} < R < 40 \text{ cm}$ the \bar{B}_R value should be below 3G.

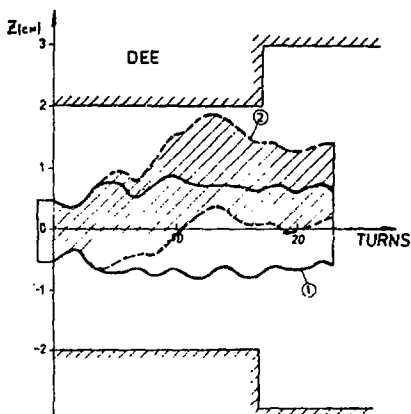


Fig. 4. Beam size and position during the first turns. 1 - required field, 2 - midplane perturbation.

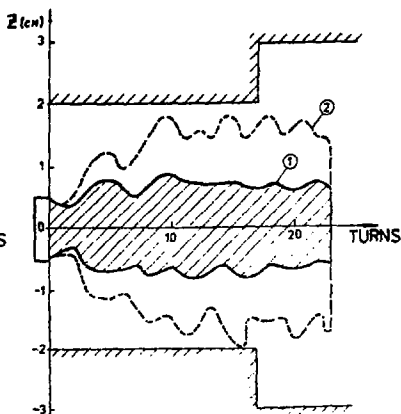


Fig. 5. Acceleration field azimuthal component effect on beam axial motion. 1 - EXRZ-code, 2 - THOUR-code.

But in the radial range $R < 20$ cm the analytical appreciations are difficult to perform due to particle phase dependence of the axial focussing strength. Beam motion calculations, using complete set of equations (EXRZ-code) showed the necessity of the requirement $\bar{B}_R < a \cdot R$ for $R > 10$ cm and $a = 0.3$ G/cm and $\bar{B}_R < 3G$ for $10 \text{ cm} < R < 20$ cm. Beam deviation under the indicated condition is shown in Fig.4. The effect of neglecting the acceleration field azimuthal component in the particle axial motion equation (THOUR-code) is noticeable in Fig.5. According to Fig.5 the axial motion particle loss appreciated with the THOUR code is a little higher than in reality.

ACCELERATION MODES

As is shown in ref. /4/ at the beginning of beam injection the acceleration voltage amplitude should be greater than 45 kV to enable the beam to surround the central electrode configuration. That is why for all the three modes of acceleration the initial voltage is set to be 50 kV. In addition to the mode with a separatrix area $A_b = 100 \text{ MeV} \cdot \text{ns}$ a voltage linear decrease during $57.6 \mu\text{s}$ has become necessary. Other data concerning acceleration voltage amplitude time dependence are given in ref. /5/. Beam intensity performance from the initial up to the final radius is shown in Fig.6. During the first $100 \mu\text{s}$ the beam losses for 1 and 2 modes are due to dee voltage decrease from 50 kV to the value required by the respective mode. In the region $t = 200 \mu\text{s}$ beam losses by mode 3 can be explained through the presence of separatrix area minimum in the case of time-constant 50 kV acceleration voltage amplitude. During acceleration the beam performs ≈ 16000 turns. Figure 7 shows the radial dependence of separatrix radial size.

When betatron radial amplitude is zero the separatrix radial size corresponds to the beam radial limits.

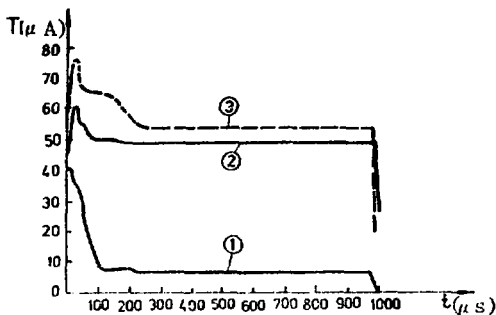


Fig.6. Beam intensity for various acceleration modes. 1 - $A_b = 100 \text{ MeV} \cdot \text{ns}$, 2 - $A_b = 300 \text{ MeV} \cdot \text{ns}$, 3 - $V_D = 50 \text{ kV}$.

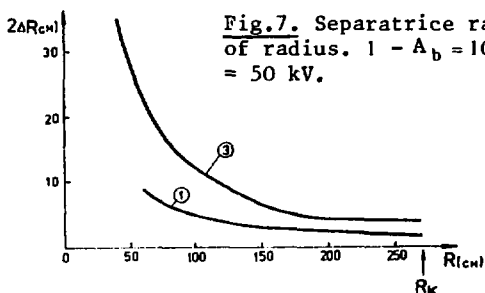


Fig.7. Separatrice radial size dependence of radius. 1 - $A_b = 100$ MeV·ns, 3 - $V_D = 50$ kV.

CONCLUSION

Computer simulation of the beam capture confirmed the earlier internal beam intensity appreciation^{6/}. In the first phase oscillation region magnetic field tolerances (mean field, first harmonics, field radial components) were obtained. Calculation of the beam acceleration process from injection up to the final radius made it possible to refine the required time dependences of acceleration voltage amplitude for various modes of acceleration.

REFERENCES

1. Thouroude D. MSC/PR/3995, 1975.
2. Glazov A.A., Shakun M.G. JINR, 9-11224, Dubna, 1978.
3. Bogolubov N.N., Mitropolsky Yu.A. Asymptotical Methods in the Nonlinear Oscillation Theory. "Nauka", Moscow, 1974.
4. Vorozhtsov S.B., Dmitrievsky V.P. JINR, P9-80-410, Dubna, 1980.
5. Vorozhtsov S.B., Dmitrievsky V.P., Zaplatin N.L. JINR, P9-12882, Dubna, 1979.
6. Glazov A.A. et al. JINR, 9-3211, Dubna, 1967.

Received by Publishing Department
on January 26 1981.

WILL YOU FILL BLANK SPACES IN YOUR LIBRARY?

You can receive by post the books listed below. Price - in US \$,
including the packing and registered postage

D1,2-8405	Proceedings of the IV International Symposium on High Energy and Elementary Particle Physics. Varna, 1974.	3.89
P1,2-8529	The International School-Seminar of Young Scientists. Actual Problems of Elementary Particle Physics. Sochi, 1974.	4.70
D6-8846	XIV Symposium on Nuclear Spectroscopy and Nuclear Theory. Dubna, 1975.	3.70
E2-9086	Proceedings of the 1975 JINR-CERN School of Physics. Alushta, 1975.	16.00
D13-9184	Proceedings of the International Meeting on Proportional and Drift Chambers. Dubna, 1975.	10.00
D1,2-9224	Proceedings of the IV International Seminar on High Energy Physics Problems. Dubna, 1975.	4.80
	Proceedings of the VI European Conference on Controlled Fusion and Plasma Physics. Moscow, 1973, v.II.	15.00
D-9920	Proceedings of the International Conference on Selected Topics in Nuclear Structure. Dubna, 1976.	15.00
D9-10500	Proceedings of the Second Symposium on Collective Methods of Acceleration. Dubna, 1976.	11.00
D2-10533	Proceedings of the X International School on High Energy Physics for Young Scientists. Baku, 1976.	11.00
D13-11182	Proceedings of the IX International Symposium on Nuclear Electronics. Varna, 1977.	10.00
D17-11490	Proceedings of the International Symposium on Selected Problems of Statistical Mechanics. Dubna, 1977.	16.00
D6-11574	Proceedings of the XV Symposium on Nuclear Spectroscopy and Nuclear Theory. Dubna, 1976.	4.70
D3-11787	Proceedings of the III International School on Neutron Physics. Alushta, 1978.	12.00
D13-11807	Proceedings of the III International Meeting on Proportional and Drift Chambers. Dubna, 1976.	14.00
	Proceedings of the VI All-Union Conference on Charged Particle Accelerators. Dubna, 1978. 2 volumes.	25.00

D1,2-12036	Proceedings of the V International Seminar on High Energy Physics Problems. Dubna, 1976.	15.00
D1,2-12450	Proceedings of the XII International School on High Energy Physics for Young Scientists. Bulgaria, Primorsko, 1978.	18.00
R2-12462	Proceedings of the V International Symposium on Nonlocal Field Theories. Alushta, 1979.	9.50
D-12831	The Proceedings of the International Symposium on Fundamental Problems of Theoretical and Mathematical Physics. Dubna 1979.	8.00
D-12965	The Proceedings of the International School on the Problems of Charged Particle Accelerators for Young Scientists. Minsk 1979.	8.00
D11-80-13	The Proceedings of the International Conference on Systems and Techniques of Analytical Computing and their Applications in Theoretical Physics. Dubna, 1979.	8.00
D4-80-271	The Proceedings of the International Symposium on Few Particle Problems in Nuclear Physics. Dubna, 1979.	8.50
D4-80-385	The Proceedings of the International School on Nuclear Structure. Alushta, 1980.	10.00

Orders for the above-mentioned books can be sent at the address:

Publishing Department. JINR

Head Post Office, P.O. Box 79 101000 Moscow, USSR

SUBJECT CATEGORIES OF THE JINR PUBLICATIONS

Index	Subject
1.	High energy experimental physics
2.	High energy theoretical physics
3.	Low energy experimental physics
4.	Low energy theoretical physics
5.	Mathematics
6.	Nuclear spectroscopy and radiochemistry
7.	Heavy ion physics
8.	Cryogenics
9.	Accelerators
10.	Automatization of data processing
11.	Computing mathematics and technique
12.	Chemistry
13.	Experimental techniques and methods
14.	Solid state physics. Liquids
15.	Experimental physics of nuclear reactions at low energies
16.	Health physics. Shieldings
17.	Theory of condensed matter
18.	Applied researches

Издательский отдел Объединенного института ядерных исследований.
Заказ 29234. Тираж 400. Уч.-изд. листов 0,77.
Редактор Э.В.Ивашкевич.
Набор В.С.Румянцевой, Н.И.Коротковой.
Макет Р.Д.Фоминой. Подписано к печати 10.02.81.