

BNL--35438

DE85 005138

HIGH ENERGY FACILITIES
Advanced Projects

BEAM LOSS DUE TO THE APERTURE LIMITATION
RESULTING FROM INTRABEAM SCATTERING

S.Y. Lee

September 12, 1984

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the *United States Government* nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

B R O O K H A V E N N A T I O N A L L A B O R A T O R Y
A S S O C I A T E D U N I V E R S I T I E S , I N C .

UPTON, LONG ISLAND, NEW YORK 11973

Under Contract No. DE-AC02-76CH00016
UNITED STATES DEPARTMENT OF ENERGY

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Lee

DISCLAIMER

This Report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumed any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency, contractor or subcontractor thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency, contractor or subcontractor thereof.

High Energy Facilities
Advanced Projects

RHIC-5

BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973

RHIC Technical Note No. 5

BEAM LOSS DUE TO THE APERTURE LIMITATION
RESULTING FROM INTRABEAM SCATTERING

S. Y. Lee

September 12, 1984

ABSTRACT

Diffusion equation is used to evaluate the beam loss in the presence of aperture limitation resulting from the intrabeam scattering. We discuss the effect of different boundary conditions. Satisfactory beam intensity can be maintained within the proposed RHIC operation time.

I. Introduction

Intrabeam scattering (IBS)¹ has become one of the important topics in the heavy ion collider design study. Detailed calculation of the emittance ϵ_N , momentum spread σ_E and bunch length σ_L blow up due to IBS has been performed by G. Parzen.² Fig. 1 summarizes these results, where we have plotted σ_E , ϵ_N and σ_L vs. $t^{1/2}$. It is tempting to argue that σ_E , ϵ_N and σ_L satisfies certain statistical random diffusion process. In fact, the situation is not very simple. First, the Einstein relation of Brownian motion is not satisfied at all. However Fig. 1 shows that within this limited region of time scale, the Einstein relation is not a very bad approximation after all.

With the diffusion equation in mind, we would like to ask the question of beam survival rate in these diffusion processes. Section 2 reviews briefly the Fokker-Planck equation and Section 3 discusses the transversed and longitudinal losses and the Conclusion is given in Section 4.

2. Fokker-Planck diffusion equation

For Markovian Processes, the distribution function $\rho(y,t)$ satisfies the Fokker-Planck equation.³

$$\frac{\partial \rho}{\partial t} = - \frac{\partial}{\partial y} (A_1 \rho) + \frac{1}{2} \frac{\partial^2}{\partial y^2} (A_2 \rho) \quad (1)$$

where

$$A_1 = \lim_{\Delta t \rightarrow 0} [\langle \Delta y \rangle / \Delta t] \quad (2)$$

$$A_2 = \lim_{\Delta t \rightarrow 0} [\langle (\Delta y)^2 \rangle / \Delta t] \quad (3)$$

Higher order contributions in eq. (1) are neglected. For dynamical system where a Hamiltonian governs the motion of dynamical variables,⁴ one has

$$A_1 = \frac{1}{2} \frac{\partial}{\partial y} A_2 . \quad (4)$$

With this relation, eq. (1) becomes

$$\frac{\partial \rho}{\partial t} = \frac{\partial}{\partial y} \left(\frac{A_2}{2} \frac{\partial \rho}{\partial y} \right) . \quad (5)$$

A special interesting situation is $A_1 = \langle \Delta y \rangle / \Delta t = \text{constant} = D$, then

$$A_2 = 2D(t) y \quad (6)$$

Eq. (5) then becomes

$$\frac{\partial \rho}{\partial t} = D \frac{\partial}{\partial y} y \frac{\partial}{\partial y} \rho \quad (7)$$

The fundamental solution of eq. (7) is

$$\rho(y, t) = \frac{1}{\langle \Delta y(t) \rangle} e^{-y / \langle \Delta y(t) \rangle} \quad (8)$$

On the other hand, another interesting situation is that $A_1 = 0$. We have then $A_2 = \langle (\Delta y)^2 \rangle / \Delta t = D(t)$. The fundamental solution in this case is

$$\rho(y, t) = \frac{1}{\sqrt{4\pi \langle \Delta y^2(t) \rangle}} e^{-y^2 / 2 \langle \Delta y^2(t) \rangle} \quad (9)$$

3. Applications

3.1. Transverse phase space

The Fokker-Planck equation for the transverse phase space is given

$$\frac{\partial \rho}{\partial t} = \frac{\partial}{\partial \epsilon} \left(D \epsilon \frac{\partial \rho}{\partial \epsilon} \right)$$

where ϵ is the emittance of the beam and

$$D = \frac{d\langle\epsilon\rangle}{dt} = D(t)$$

Let us define new variable τ and y as

$$\tau = \frac{1}{\epsilon_a} \int D dt = \frac{1}{\epsilon_0} (\langle\epsilon_f\rangle - \langle\epsilon_i\rangle)$$

$$y = \epsilon/\epsilon_0$$

The diffusion equation becomes then

$$\frac{\partial\rho}{\partial\tau} = \frac{\partial}{\partial y} \left(y \frac{\partial\rho}{\partial y} \right) \quad (10)$$

Besides the fundamental solution of equation (8), there are alternative solutions to equation (10). Teng,⁵ MacLachlan⁶ and Ruggiero⁷ used the sink boundary condition

$$\rho(y=1, \tau) = 0 \quad (11a)$$

and initial condition

$$\rho(y, \tau=0) = \rho_0(y), \quad (11b)$$

where $\rho_0(y)$ is the initial distribution.

The solution is given by

$$\rho(y, \tau) = \sum_{n=1}^{\infty} \frac{J_0(\lambda_n \sqrt{y}) e^{-\frac{\lambda_n^2}{4} \tau}}{J_1^2(\lambda_n)} \int_0^1 \rho_0(y') J_0(\lambda_n \sqrt{y'}) dy' \quad (12)$$

where J_0 and J_1 are Bessel functions and λ_n 's are given by

$$J_0(\lambda_n) = 0$$

Due to the aperture limitation, the number of particles confined is given by

$$N(\tau) = \int_0^1 \rho(y, \tau) dy = 2 \sum_n \frac{e^{-\lambda_n^2 \tau/4}}{\lambda_n J_1(\lambda_n)} \int_0^1 \rho_0(y) J_0(\lambda_n y) dy \quad (13)$$

Table 1 summarizes the result calculated with boundary conditions (11a) and (11b). While the loss rate calculated from the fundamental solution in eq. (8) is also shown for comparison. With the Courant-Snyder invariant, the fundamental solution of eq. (8) is a Gaussian distribution of the phase space variables x and x' . The loss rate shown on the last row of Table 1 is therefore determined by the available phase space, $\sqrt{6}\sigma_a/\sigma_x$.

Since the aperture acts only as a beam scraper, which gives no dynamical action to the diffusion process, I believe that eq. (11a) is incorrect. The similarity between the diffusion process here and heat conduction is inappropriate, because the heat loss is proportional to the temperature gradient. In the present situation, the diffusion process comes from the interaction between beam particles alone.

Table 1

γ	5 (.65hr)	7 (2hr)	12*	30*	100*
$\delta (10^{-3})$	0.93	1.15	1.56	1.98	1.10
ϵ_i^N	10 π	10 π	10 π	10 π	10 π
ϵ_f^N	37.2 π	52.1 π	44 π	33.2 π	27.8 π
(± 26 mm good field) ϵ_a	6x9.42 π	6x8.79 π	6x7.68 π	6x6.62 π	6x8.93 π

Analysis with boundary conditions in eqs. (11a) and (11b)⁺

τ	.096	.114	.061	.019	.0033
loss rate(%)	<1	<1	<1	<1	0

Analysis with the fundamental solution of eq. (8).

$\epsilon_a / (\epsilon_f^N / \gamma)$	7.60	7.09	12.6	36	19.3
$\sqrt{6}\sigma_a / \sigma_x$	2.76	2.66	3.5	6.	14.
loss rate(%)	2.2	2.9	.2	0	0

δ is the rms momentum spread

ϵ_a is the admittance space available for betatron oscillation

$\epsilon_i^N, \epsilon_f^N$ are the normalized initial and final emittances respectively

$$\tau = (\epsilon_f^N - \epsilon_i^N) / \gamma \epsilon_a$$

$\sqrt{6}\sigma_a / \sigma_x$ is the ratio of aperture to the beam rms transverse physical size

* 10 hr operation time is assumed

+ see ref. 7 for details.

3.2. Diffusion in the longitudinal phase space

Let us define the momentum spread as

$$\delta = \frac{\Delta p}{p} \quad (14)$$

The Fokker-Planck equation becomes

$$\frac{\partial \rho}{\partial t} = \frac{1}{2} \frac{\partial}{\partial \delta} (A_2 \frac{\partial \rho}{\partial \delta}) \quad (15)$$

where

$$A_2 = \frac{d}{dt} \langle \delta^2 \rangle ,$$

is assumed to be a function of time only. Let Δ_a be the aperture limit.

Defining Z and τ as

$$Z \equiv \frac{\delta}{\Delta_a} \quad (16)$$

$$\tau = \frac{1}{2\Delta_a^2} \int_0^t A_2(t') dt' = \frac{1}{2\Delta_a^2} (\delta^2(t) - \delta^2(0)) , \quad (17)$$

we obtain the following Fokker-Planck equation

$$\frac{\partial \rho}{\partial \tau} = \left(\frac{\partial^2}{\partial Z^2} \right) \rho \quad (18)$$

Using the similar condition as that of eqs. (11a) and (11b), we obtain the solution

$$N(\tau) = 2 \sum_{n=0}^{\infty} \frac{(-)^n}{\beta_n} e^{-\beta_n^2 \tau} \approx \frac{4}{\pi} e^{-\frac{\pi^2}{4} \tau} \quad (19)$$

with

$$\beta_n = \frac{\pi}{2} (2n+1)$$

for a delta function initial distribution.

Table 2 summarizes the loss rate calculated from eq. (19) and that calculated from the fundamental Gaussian distribution of eq. (9). We found that the loss rate obtained in these two analysis are about the same. However in reality they are very different. Fig. 2 shows the survival number as a function of parameter τ in equation (17) for these two cases. Curve (A) obtained from the boundary conditions (11a) and (11b), while (B) is equal to $\text{erf}(1/2\sqrt{\tau})$ obtained from the fundamental solution of eq. (9). We feel that boundary conditions (11a) and (11b) are inappropriate in this case too.

Table 2

γ	5	7	12	30	100
$\Delta_a = (\Delta p/p)_{\text{bucket}} (10^{-3})$	2.28	2.72	3.82	9.95	2.68
$\delta(t=0)$.818	.751	.678	1.261	.359
$\delta_F = \delta(t=t_F)$.93	1.14	1.563	1.985	1.099

Analysis with boundary conditions (11a) and (11b)

τ_o	.064	.038	.016	.008	.009
τ_t	.083	.088	.084	.024	.085
loss(%)	4	5	4	0	4

Analysis with the fundamental solution of eq. (9).

Δ_a / δ_F	2.45	2.39	2.44	5.01	2.44
loss(%)	3	3	3	0	3

4. Conclusion

In conclusion, we have applied the Fokker-Planck diffusion equation to estimate the beam loss due to the intrabeam scattering. Due to many particle dynamics, diffusion equation should be appropriate in describing this random process. We discuss however the implication of boundary conditions on the beam loss. We argue to prefer one special model to the other. The effect of the intrabeam scattering process is found to contribute only about 5% of total loss of beam as a whole. Details are however summarized in Tables 1 and 2 respectively for transverse and longitudinal phases.

References

1. A. Piwinski, Proc. 9th Int. Conf. on High Energy Accelerators, 1974, p. 405; J.D. Bjorken and S.K. Mtingwa, Particle Accelerators, 13, 115 (1983).
2. G. Parzen, BNL report, RHIC-PG-49, private communications.
3. See e.g. S. Chandrasekhar, Rev. Mod. Phys. 15, 1 (1943).
4. S. Krinsky and J.M. Wang, Particle Accelerators 12, 107 (1982).
5. L.C. Teng, FNAL report Exp-1, 1972.
6. J.A. Maclacklan, FNAL report, TM-342 (1972).
7. A.G. Ruggiero, BNL report, RHIC-PG-47.

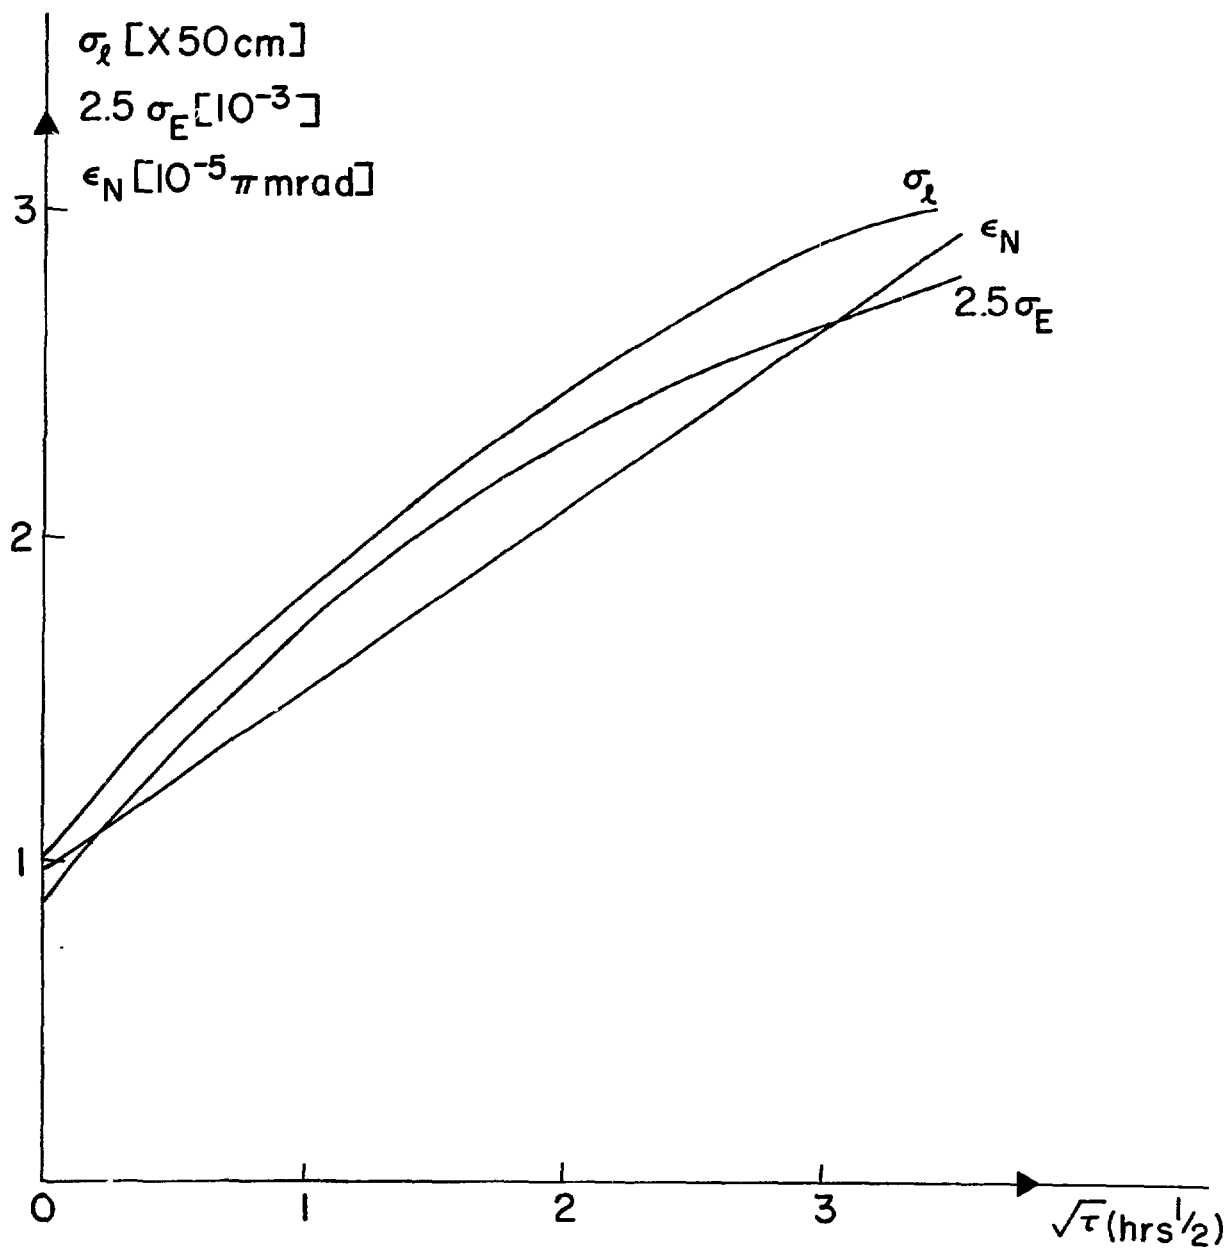


Fig. 1 Bunch length, energy spread and the normalized emittance of the beam par-

