

Radionuclide sorption on crushed and intact granitic rock

Volume and surface effects

Trygve E Eriksen, Birgitta Locklund

The Royal Institute of Technology, Department of Nuclear
Chemistry, Stockholm, Sweden

May 1989

SKB-TR--89-25.

**RADIONUCLIDE SORPTION ON CRUSHED AND INTACT GRANITIC
ROCK
VOLUME AND SURFACE EFFECTS**

Trygve E Eriksen, Birgitta Locklund

The Royal Institute of Technology, Department of
Nuclear Chemistry, Stockholm, Sweden

May 1989

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the author(s) and do not necessarily coincide with those of the client.

Information on SKB technical reports from 1977-1978 (TR 121), 1979 (TR 79-28), 1980 (TR 80-26), 1981 (TR 81-17), 1982 (TR 82-28), 1983 (TR 83-77), 1984 (TR 85-01), 1985 (TR 85-20), 1986 (TR 86-31), 1987 (TR 87-33) and 1988 (TR 88-32) is available through SKB.

Radionuclide sorption on crushed and intact granitic rock.

Volume and surface effects.

Trygve E Eriksen and Birgitta Locklund

The Royal Institute of Technology

Department of Nuclear Chemistry

S-100 44 Stockholm

Abstract.

The specific surface areas and distribution ratios for sorption of ^{85}Sr , ^{137}Cs and ^{152}Eu were measured for crushed and intact granitic rock.

The experimental data can be accommodated by a sorption model encompassing sorption on outer and inner surfaces. It is clearly demonstrated that the time required to obtain reliable K_d -values for the sorption of strongly sorbing radionuclides like ^{252}Eu is very long due to solution depletion and slow diffusion into the rock.

A combination of surface area measurements and batch sorption with small particles may therefore be preferable when studying strongly sorbing nuclides.

Content.

	page
Abstract	i
Table of contents	ii
1. INTRODUCTION	1
2. EXPERIMENTAL	3
2.1 Material	3
2.2 Sorption	3
2.2.1 Crushed material	3
2.2.2 Rock coupons	4
2.3 Surface measurements	4
3. SORPTION MODEL	4
4. EXPERIMENTAL RESULTS	5
4.1 Surface areas	5
4.2 Sorption	6
4.2.1 ⁸⁵ Sr sorption	6
4.2.2 ¹³⁷ Cs sorption	6
4.2.3 ¹⁵² Eu sorption	6
5. DISCUSSION	6
6. CONCLUSIONS	8
REFERENCES	10
TABLES	11

FIGURE LEGENDS 17

FIGURES 21

1. INTRODUCTION.

The major driving force for migration of radionuclides from a repository for radioactive waste is advection by ground water. It is expected that the radionuclide will move with a velocity lower than the velocity of water

$$v = u/R$$

where v is the velocity of the radionuclide

u is the velocity of water

R is the retardation factor.

The retardation may be due to electrostatic or chemical bonding between the radionuclidic species and the solid in contact with the aqueous phase i.e. what is generally called sorption.

The sorption is empirically characterized by the distribution coefficient Kd defined by:

$$Kd = Cr/Cw \text{ (cm}^3\text{.g}^{-1}\text{)}$$

where Cr = nuclide concentration in rock

Cw = nuclide concentration in aqueous phase.

In a very simple approach the retardation for radionuclide transport in a single fracture may be described by the equation

$$R = 1 + Ka \cdot A/V$$

where A = wetted surface area of the fracture

V = void volume of fracture

Ka (cm³·cm⁻²) = surface area based distribution coefficient

The study of radionuclide sorption in the far field is thus an important part of the overall investigations needed for the assessment of potential sites for radioactive wastes disposal.

Measurements of sorption on geological material have been carried out on crushed as well as intact rock by the means of several techniques e.g batch sorption, through diffusion and high pressure convection (Berry et al., 1988).

Sorption is known to depend on the chemical conditions e.g temperature, pH, concentration of complexing agents and in batch experiments also on the water: rock ratio and the particle size range.

In our previous sorption work with crushed granite the particle size dependence was accommodated by a sorption model based on the assumption that the crushed rock consists of porous spheres with outer and inner surfaces available to interaction with the aqueous phase (Eriksen and Locklund, 1987). This raises the question whether the specific surface area of the rock as determined by e.g. a B.E.T. technique can be used as a measure or "index" for the sorption capacity of the rock as suggested by Jackson (1988).

This paper presents data from surface area and strontium, cesium and europium sorption measurements on crushed and intact granitic material. The aim of the study was to see if the

sorption capacity can be correlated to the specific surface areas.

2. EXPERIMENTAL.

2.1. Material.

The rock samples used in this study are granitic rocks with varying porosity and mineral content.

Radionuclides (^{85}Sr , ^{137}Cs , ^{152}Eu) in acidic solutions were obtained from Amersham International. The spiked solutions were prepared by diluting aliquots of the stock solutions with artificial groundwater synthesized to represent the natural groundwater in contact with granitic rock (Table 1). The radionuclide concentrations used were ^{85}Sr 10^{-10} , ^{137}Cs 10^{-9} and ^{152}Eu 10^{-8} mol·dm $^{-3}$.

2.2 Sorption.

2.2.1 Crushed material: The rock was crushed using Agat mortar and pestle. The crushed material was ultrasonically disaggregated and size sorted by wet sieving into the required size fractions. 100 mg rock (dry weight) was equilibrated with 3 cm 3 solution in polypropylene tubes, the tubes being gently agitated at ambient temperature ($\sim 20^\circ\text{C}$). At chosen time intervals tubes containing each size fraction were removed and the solutions vacuumfiltered using a Millipore sampling manifold with 0.5 μm polypropylene filters.

The activity of the solid phase and the filtered solution was measured by γ -spectrometry using a (2-x2 in) well type NaI

detector connected to a multichannel analyzer. The amount of radionuclide sorbed on the tube walls was counted and corrected for.

2.2.2 Rock coupons: The granite was cut into 16x14x4 mm coupons. The coupons were washed with distilled water in a ultrasonic bath to remove fine particles, dried and evacuated before being saturated with groundwater. A typical experiment employed approximately 10 g rock (dry weight) and 50 cm³ radionuclide solution. 100 ul samples of the solution were removed at chosen time intervals, diluted to 5 ml and counted.

2.3 Surface measurements.

The total surface areas of crushed rock and rock coupons were measured using a Micromeritics Flowsorb II 2300 apparatus, applying N₂ as the sorbing gas.

3. SORPTION MODEL.

It is assumed that crushed rock consists of spherical particles (Vandergraaf and Abry, 1982) with both outer and inner surfaces accessible for interaction with the solution. It is further assumed that the inner surface area is proportional to the particle volume.

The surface area to volume ratio of a spherical particle with diameter d is given by the relationship

$$A/V = 6/d \quad (3.1)$$

and the specific surface area of crushed rock can thus be written

$$A(t) = A(v) + A(s) \cdot (6/cd) \quad (3.2)$$

where $A(t)$ = total surface area ($m^2 \cdot g^{-1}$)

$A(v)$ = inner surface area ($m^2 \cdot g^{-1}$)

$A(s)$ = outer surface area ($m^2 \cdot cm^{-2}$)

d = particle diameter (cm)

ρ = rock density ($2.61 \text{ g} \cdot \text{cm}^{-3}$)

Correspondingly the distribution coefficient K_d is given by the equation

$$K_d = K_d(v) + K_d(s) \cdot (6/\rho d) \quad (3.3)$$

4. EXPERIMENTAL RESULTS.

4.1 Surface areas.

The specific surface areas measured on crushed rock are plotted versus $1/d$ in Figs 1-5. The diameter d characterizing each size fraction is taken to be the arithmetic mean of the apertures of the sieves bracketing the various size fractions.

The surface areas calculated by linear regression are given in Table 2. together with the surface areas of the coupons.

4.2 Sorption.

The sorption data are presented as measured distribution ratios (Rd) and not the more strictly defined Kd.

4.2.1 ^{85}Sr sorption: The results from the ^{85}Sr experiments with crushed rock are plotted in Figs 6-9 and the Rd(v) values obtained by linear regression are given in Table 3.

The experimental Rd values, obtained in sorption experiments with coupons, are plotted versus contact time in Figs 10-14 and the Rd values obtained after ~120 days are given in Table 3.

4.2.2 ^{137}Cs sorption: The Rd values measured at differing times of contact between the radionuclide solution and coupons of Stripa granite are depicted in Fig 15. As can be seen equilibrium is not reached after 120 days.

4.2.3 ^{152}Eu sorption: Sorption experiments were only carried out with crushed rock. The experimental results are summarized in Table 4 and the Rd versus time and Rd versus 1/d plots are depicted in Figs 16-17.

5. DISCUSSION.

The surface related distribution coefficients for the inner and outer surfaces of the crushed rock are given by the ratios of the the intercepts and slopes respectively obtained by linear regression analysis of the Rd and A versus 1/d plots.

The calculated $R_a(v)$, $R_a(s)$ and R_a values for ^{85}Sr sorption on crushed and intact (coupons) rock respectively are summarized in Table 5. The experimental uncertainty is rather large, but the data clearly indicate that $R_a(v)$ and $R_a(s)$ are of the same magnitude. Moreover, there is no systematic variation between R_a obtained in the coupon experiments and $R_a(v)$, $R_a(s)$ obtained using crushed rock. It ought to be emphasized that the calculation of R_a is based on the specific surface of the coupon i.e. both outer and inner surfaces are included. The geometric surface to volume ratio is however small, corresponding to a $1/d$ value of 0.43 in the plots for crushed rock.

As can be gleaned from the ^{137}Cs plot in Fig 15 sorption equilibrium was not obtained during 120 days of contact between the solution and the rock coupons. The stronger sorption of ^{137}Cs as compared to ^{85}Sr causes more radionuclide depletion in the solution. Also more radionuclide must diffuse into the rock and the time required is therefore longer.

The attainment of equilibrium in sorption experiment with ^{152}Eu requires very long time as can be seen from Figs 16, 17. This is to be expected as ^{152}Eu is strongly sorbed and the depletion of the solution results in a very slow diffusion into the rock and thereby redistribution of ^{152}Eu on all surfaces. Extrapolating the R_d versus time plot for the 125-250 μm fraction, an equilibrium value of approximately $280 \text{ cm}^3 \cdot \text{g}^{-1}$ seems reasonable. The calculated $R_d(v)$ and $R_d(s) \cdot (6/\rho d)$ values for the 125-250, 250-500 and 1000-2000 μm fractions are given in Table 6. It should be noted that fitting the R_d values

obtained after 240 hours by linear regression, which may seem reasonable in view of the experimental uncertainties, assuming sorption on the outer surface only result in an overestimate of $K_d(s)$.

The distance l diffused into rock in time t is approximately given by $l = (D_i t / \epsilon + R_d)^{1/2}$, where D_i is the intrinsic diffusion coefficient and ϵ is the porosity of the rock.

If it is assumed that equilibrium is reached within the 125-250 μm fraction after 15 days we estimate that at least 165 and 960 days are required to reach equilibrium for the 500-750 and 1000-2000 μm fractions respectively.

6. CONCLUSIONS.

1) Measurements of the specific surface area of crushed granitic rock indicate that the assumption of spherical particles with an inner surface area $A(v)$ proportional to the particle volume is reasonable.

The $A(v)$ obtained from plots of total surface area versus $1/d$, where d is diameter of particle, is in agreement with $A(v)$ values obtained by measurements on granite coupons.

2) The measured distribution ratios R_d for ^{85}Sr and ^{137}Cs sorption on crushed rock can be accommodated by a sorption model based on the assumption of porous particles.

3) The time required to determine reliable K_d -values for the strongly sorbing ^{132}Eu is very long, even for small particles.

An estimate of R_d -values for intact rock may therefore preferably be based on combining measurements of specific surface areas of crushed and intact rock with batch sorption experiments using size fractions with small diameter.

REFERENCES.

Berry J A et al

Sorption of Radionuclides on Sandstones and
Mudstones.

Radiochimica Acta 44/45 135 (1988)

Eriksen T E and Locklund B

Radionuclide sorption on granitic drill core
material.

SKB Technical Report 87-22 (1987)

Vandergraaf T and Abry D R M

Nucl Technol 57 399 (1982)

Jackson R E and Inch K J

In situ adsorption of ^{85}Sr in a sand aquifer.

J Contaminant Hydrology (in press 1988)

Table 1Composition of artificial ground water^{a)}.

Species	Concentration mg·dm ⁻³	Species	Concentration mg·dm ⁻³

HCO ₃ ⁻	123	Ca ²⁺	18
SO ₄ ²⁻	9.6	Mg ²⁺	4.3
Cl ⁻	70	K ⁺	3.9
SiO ₂	12	Na ⁺	65

a) pH 8 - 8.2, Eh 260 mV (aerated)

Table 2

Surface areas of crushed granite and granite coupons, measured by N_2 -sorption. The particle size is defined by the particle diameter d (cm), i.e. assuming spherical particles.

Granite	Surface area $m^2 \cdot g^{-1}$ (crushed rock)	Surface area $m^2 \cdot g^{-1}$ (rock coupons)
Stripa	$(0.25 \pm 0.02) + (2.4 \pm 0.6) \cdot 10^{-3} \cdot 1/d$	0.205 ± 0.005
Pingsta- berg	$(0.3 \pm 0.04) + (2.1 \pm 1.1) \cdot 10^{-3} \cdot 1/d$	0.28 ± 0.01
M-73002	$(0.074 \pm 0.009) + (1.4 \pm 0.3) \cdot 10^{-3} \cdot 1/d$	0.1 ± 0.005
85004	$(0.061 \pm 0.0026) + (3.85 \pm 0.76) \cdot 10^{-3} \cdot 1/d$	0.08 ± 0.005
85015	$(0.21 \pm 0.0015) + (1.57 \pm 0.1) \cdot 10^{-3} \cdot 1/d$	

Table 3

Distribution ratios R_d for ^{85}Sr sorption on inner surfaces of crushed and intact (coupons) granitic rock.

Granite	$R_d(v) (\text{cm}^3 \cdot \text{g}^{-1})$ (crushed)	$R_d (\text{cm}^3 \cdot \text{g}^{-1})$ (coupons)
<u>Sr-85</u>		
Stripa	5.1 ± 0.3	2.3 ± 0.3
Pingstabergr	5.6 ± 0.7	2.9 ± 0.4
73002	2.13 ± 0.3	2.0 ± 0.1
85004	3.20 ± 0.38	1.6 ± 0.2
85015	10.7 ± 2.6	
<u>Cs-137</u>		
Stripa	33 ± 5	

Table 4

Distribution ratios for Eu-152 sorption on crushed Stripa granite after differing time of contact with spiked solution.

Fraction	1/d(cm ⁻¹)	Rd(cm ³ ·g ⁻¹)			
		1h*)	24h*)	96h*)	240h*)
63-90	130.7	16.95±0.3			
90-125	93.01	14.75±0.3			
125-250	53.33	11.2±0.3	88.56	194.86	264.5
250-500	26.67	8.9±0.2			
500-750	16.0	7.9±0.3	53.92	82.11	107.9
750-1000	11.43	6.7±0.15			
1000-2000	6.67		23.2	40.9	47.4

*) time of contact with spiked solution.

Table 5

Surface-related distribution ratios Ra(s), Ra(v) for sorption in outer and inner surfaces respectively of crushed and intact granitic rock.

	crushed	crushed	coupons
Granite	Ra(v) · 10 ⁴	Ra(s) · 10 ⁴	Ra · 10 ⁴
	cm ³ · cm ⁻²	cm ³ · cm ⁻²	cm ³ · cm ⁻²
<hr/>			
<u>Sr-85</u>			
Stripa	20.4 ± 2.7	30.8 ± 12.5	11.2 ± 1.5
Pingstaberq	18.7 ± 3.4	13 ± 9	10.4 ± 1.5
M-73002	28.8 ± 5.4	10.8 ± 2.3	20 ± 1.4
85004	52.5 ± 23.2	10.1 ± 2	20 ± 2.8
85015	51 ± 12.4	66 ± 26	
 <u>Cs-137</u>			
Stripa	132 ± 27	259 ± 104	> 24*
 <u>Eu-152</u>			
	740	740	

* Equilibrium not obtained

Table 6

Calculated distribution coefficient $Rd(v)$, $Rd(s)$ for sorption of Eu-152 on crushed Stripa granite, assuming equilibrium within the 63-125 μm fraction after 10 days sorption.

Fraction	$1/d$	$A(v)$	$A(s)$	$Rd(v)$	$Rd(s)$
	cm^{-1}	$\text{m}^2 \cdot \text{g}^{-1}$	$(6/\rho d)$ $\text{m}^2 \cdot \text{g}^{-1}$	$\text{cm}^3 \cdot \text{g}^{-1}$	$(6/\rho d)$ $\text{cm}^3 \cdot \text{g}^{-1}$
125-250	53.33	0.25 ± 0.03	0.128 ± 0.048	185	95
500-750	16	0.25 ± 0.03	0.0384 ± 0.014	185	28.45
1000-2000	6.67	0.25 ± 0.03	0.016 ± 0.0058	185	11.85

FIGURE LEGENDS.

Fig. 1

Specific surface area of crushed Stripa granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 2

Specific surface area of crushed Pingstabergr granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 3

Specific surface area of crushed 73002 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 4

Specific surface area of crushed 85004 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 5

Specific surface area of crushed 85015 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 6

Distribution ratio R_d for ^{85}Sr sorption on crushed Pingstaberg granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 7

Distribution ratio R_d for ^{85}Sr sorption on crushed 73002 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 8

Distribution ratio R_d for ^{85}Sr sorption on crushed 85004 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 9

Distribution ratio R_d for ^{85}Sr sorption on crushed 85015 granite plotted versus $1/d$, where d is a diameter characterizing the particle size fraction.

Fig. 10

Distribution ratio R_d for ^{85}Sr sorption on intact Stripa granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 11

Distribution ratio R_d for ^{85}Sr sorption on intact Pingstaberg granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 12

Distribution ratio R_d for ^{85}Sr sorption on intact 73002 granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 13

Distribution ratio R_d for ^{85}Sr sorption on intact 73002 granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 14

Distribution ratio R_d for ^{85}Sr sorption on intact 85004 granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 15

Distribution ratio R_d for ^{137}Cs sorption on intact Stripa granite plotted versus time of contact with radionuclide solution ($\sim 16 \times 14 \times 4$ mm coupons).

Fig. 16

Distribution ratio R_d for ^{152}Eu sorption on crushed Stripa granite plotted versus time of contact with radionuclide solution

O 125 - 500 μm , Δ 500 - 700 μm

\square 1000 - 2000 μm

Fig. 17

Distribution ratio for R_d for ^{152}Eu sorption on crushed Stripa granite plotted versus $1/d$, where d is a diameter

characterizing the size fraction

contact time: \circ 1h, Δ 24h, \square 96h, \times 240h.

Fig. 1

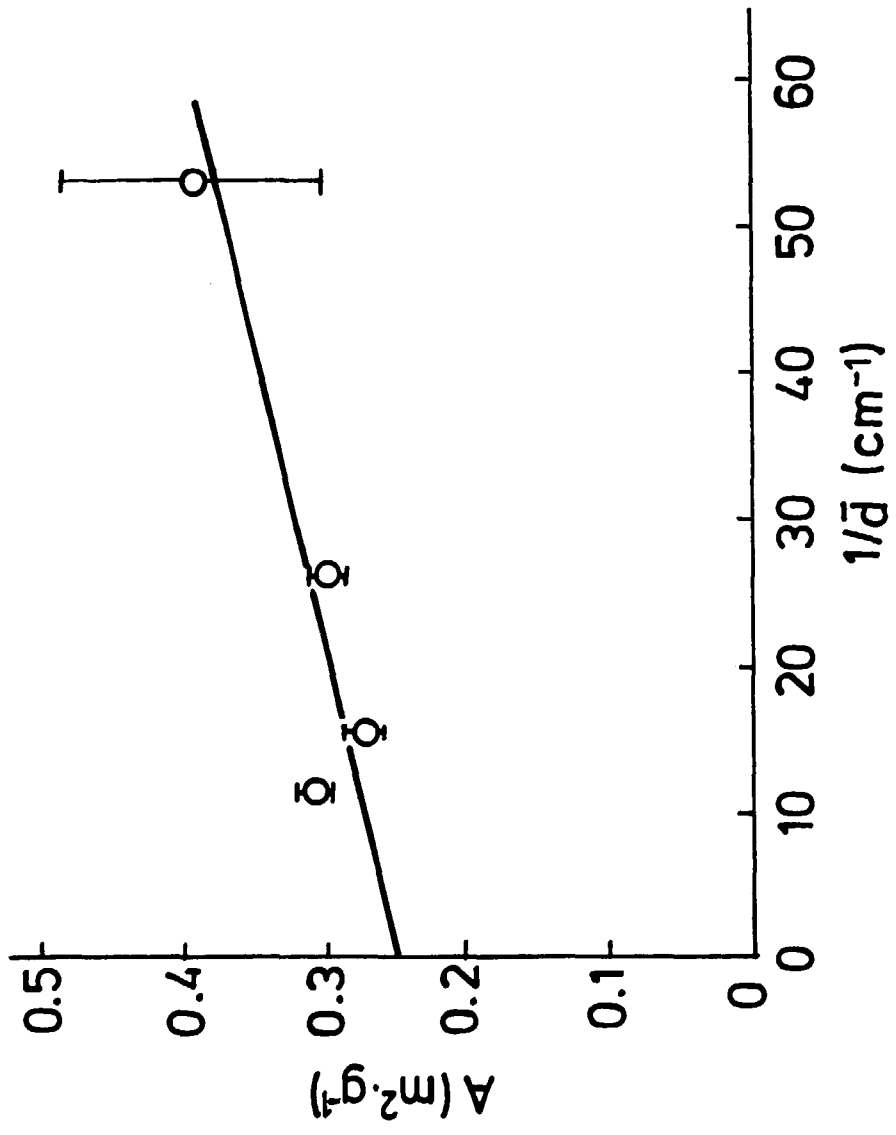


Fig. 2

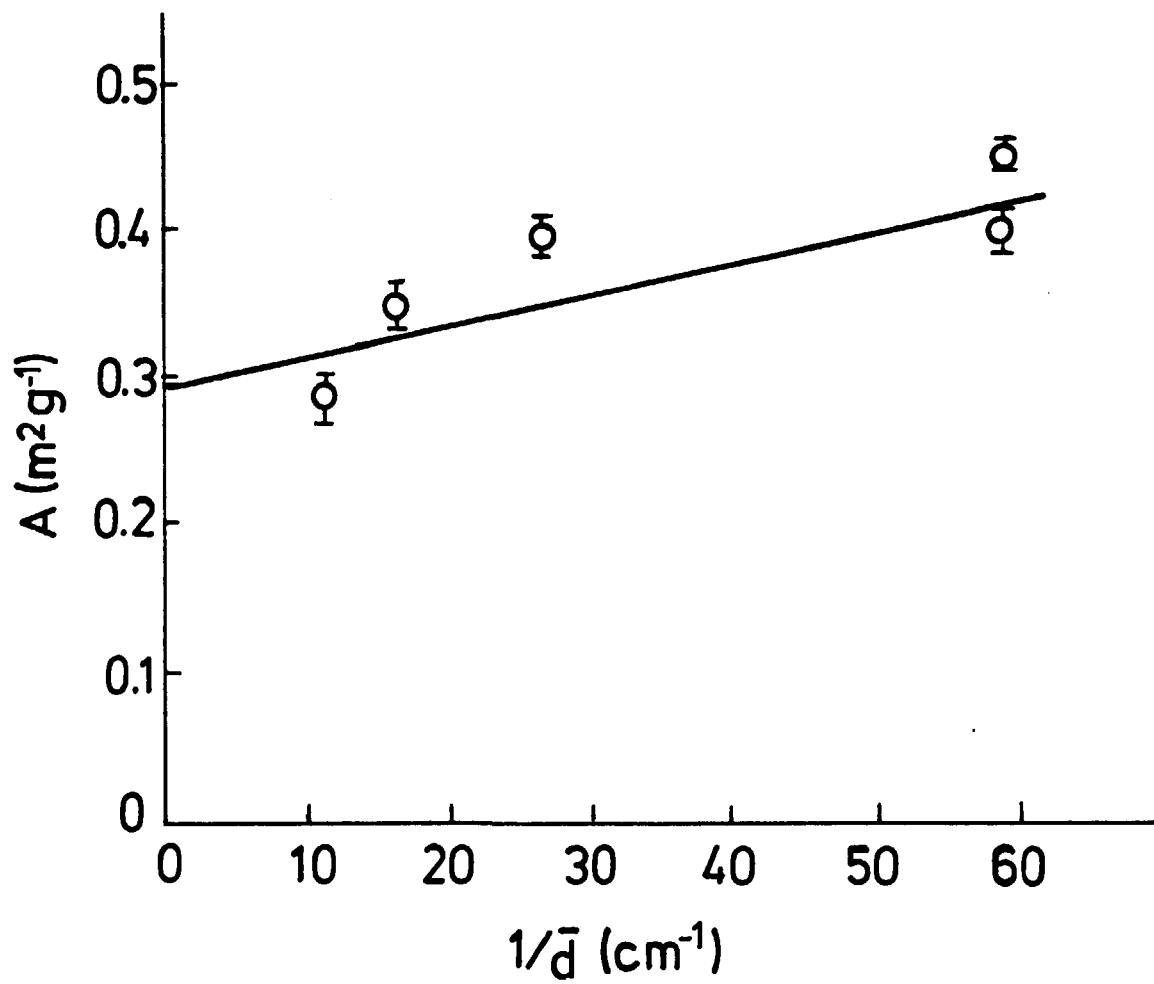


Fig. 3

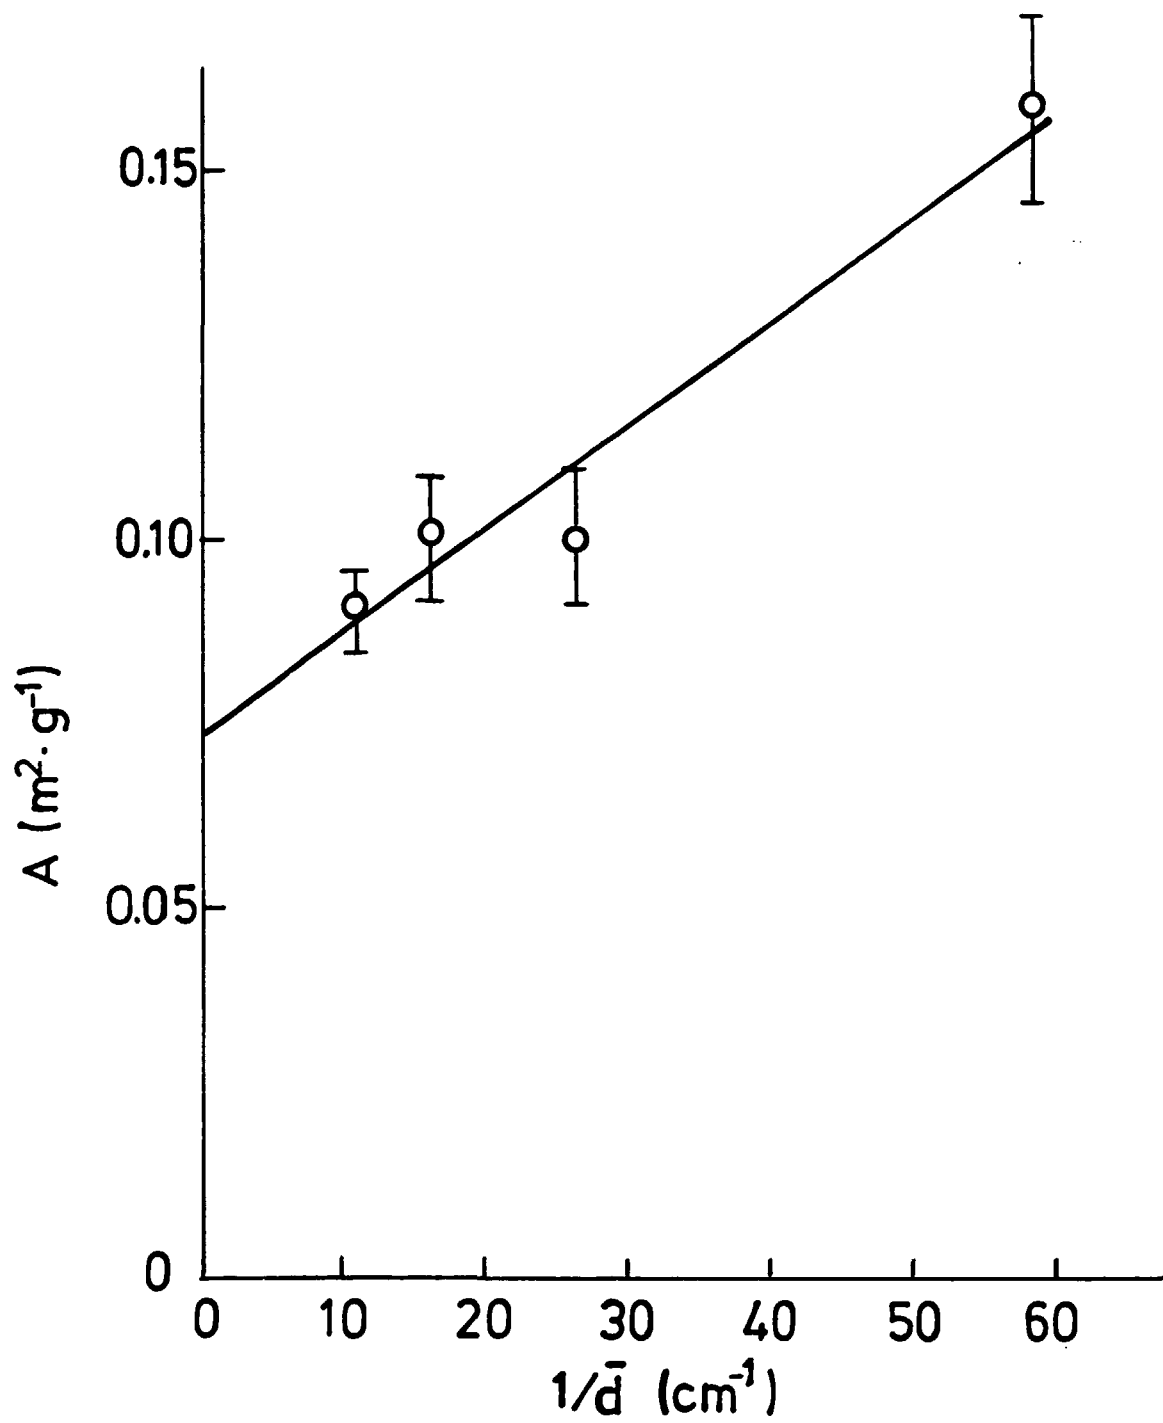


Fig. 4

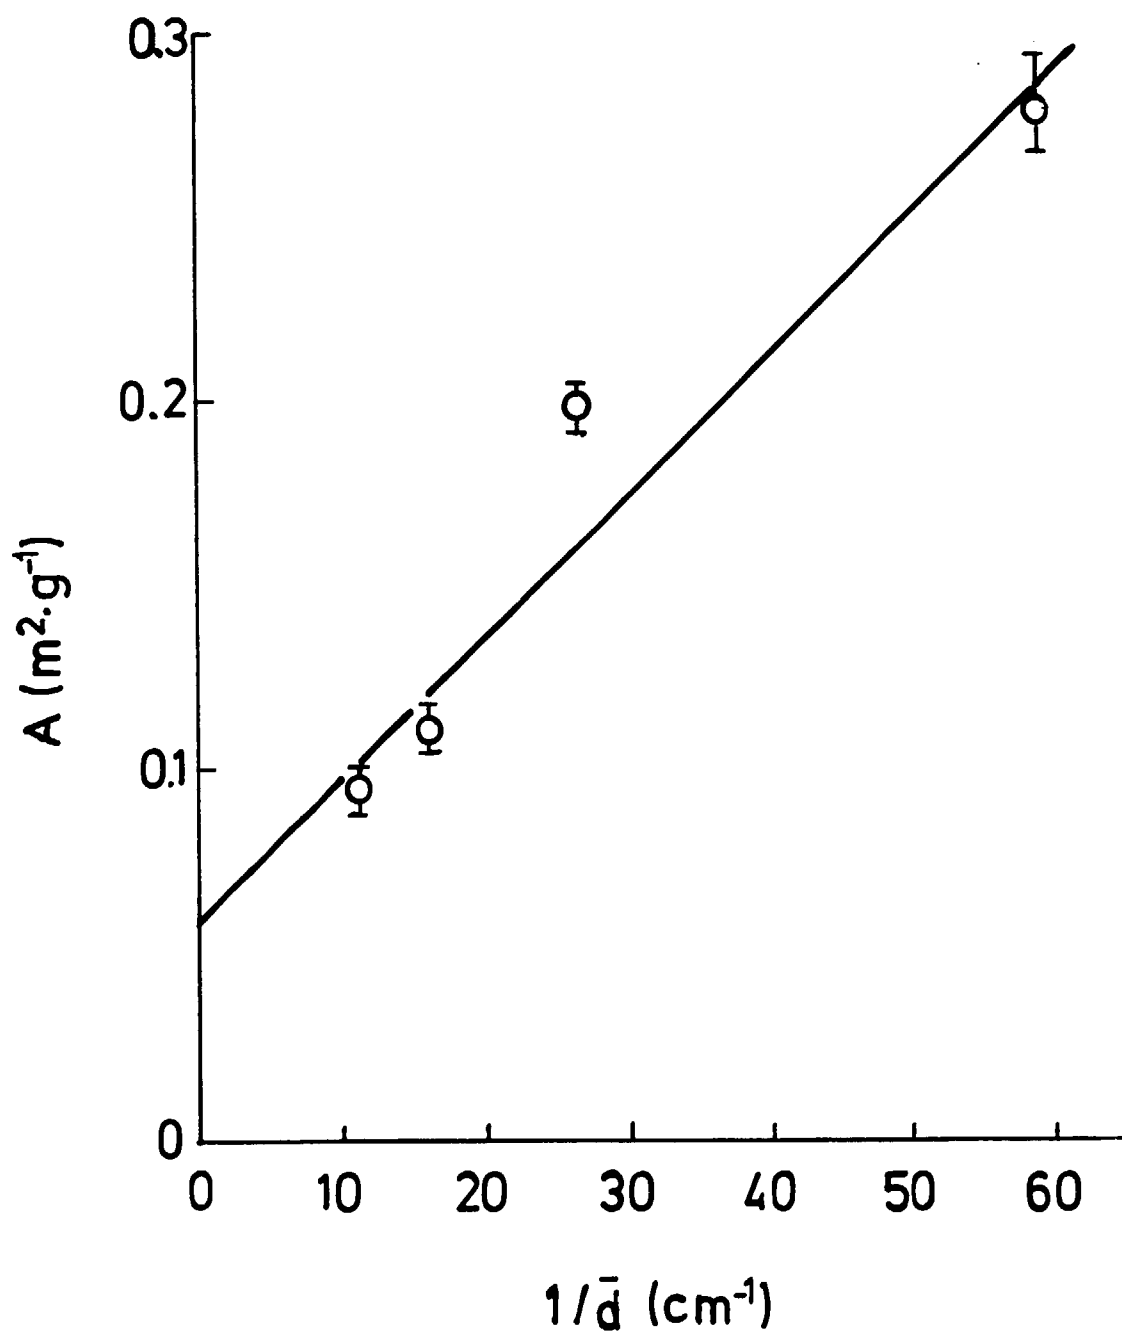


Fig. 5

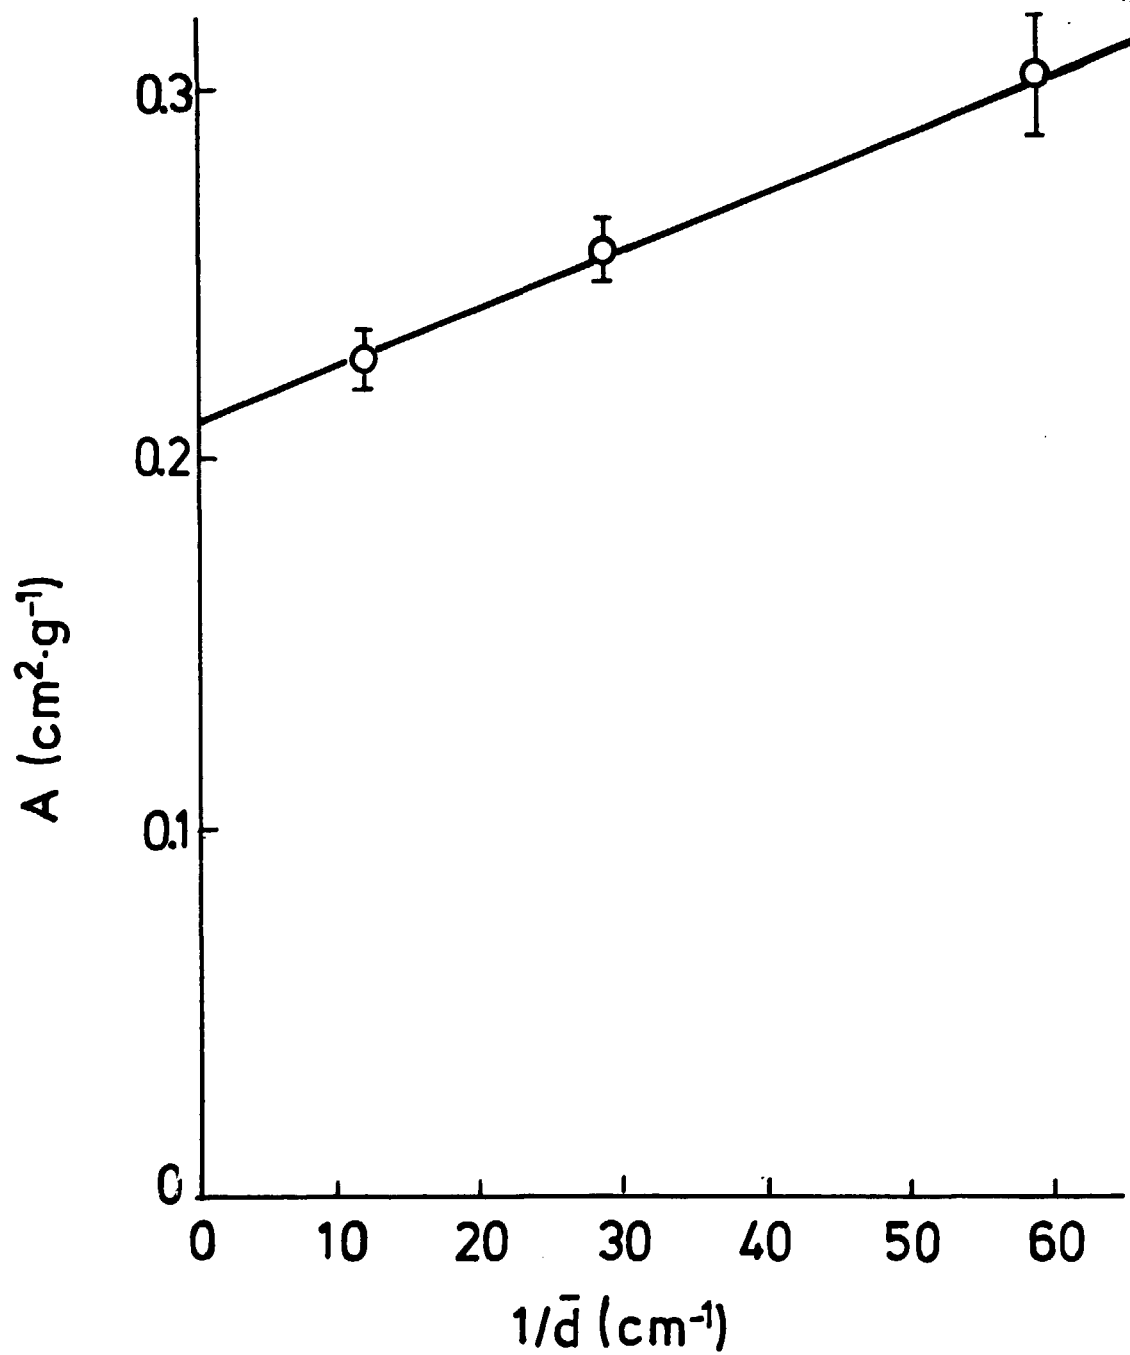


Fig. 6

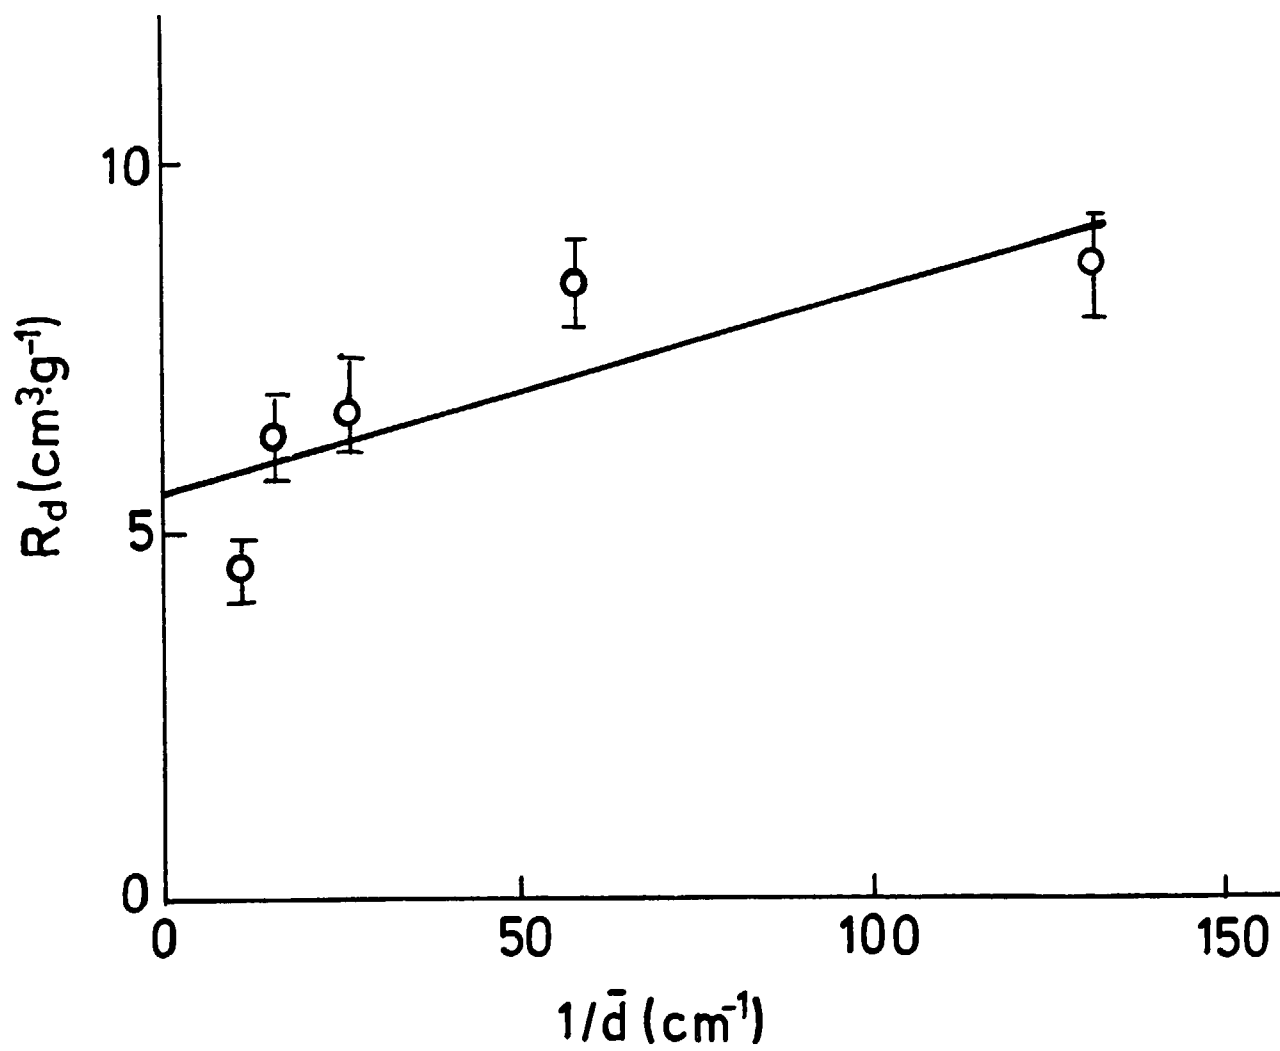


Fig. 7

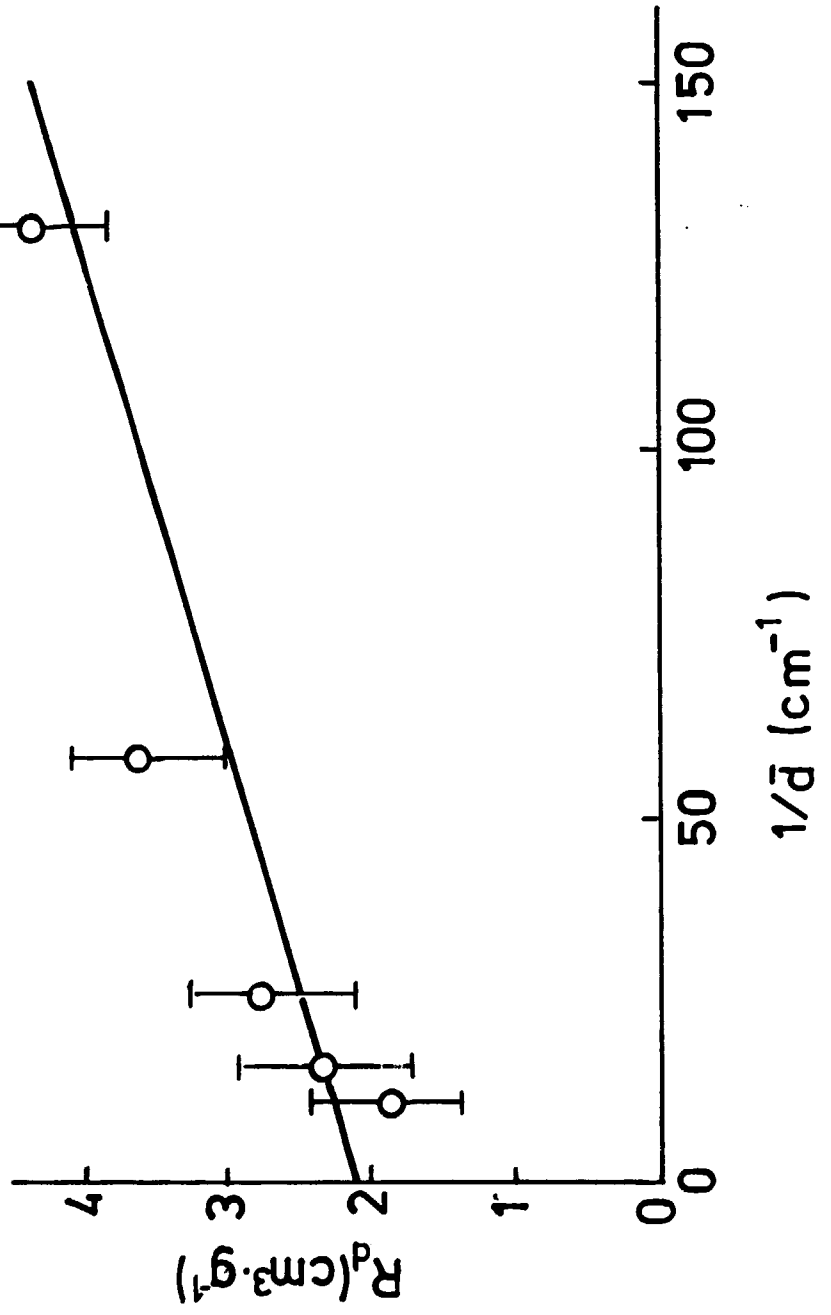


Fig. 8

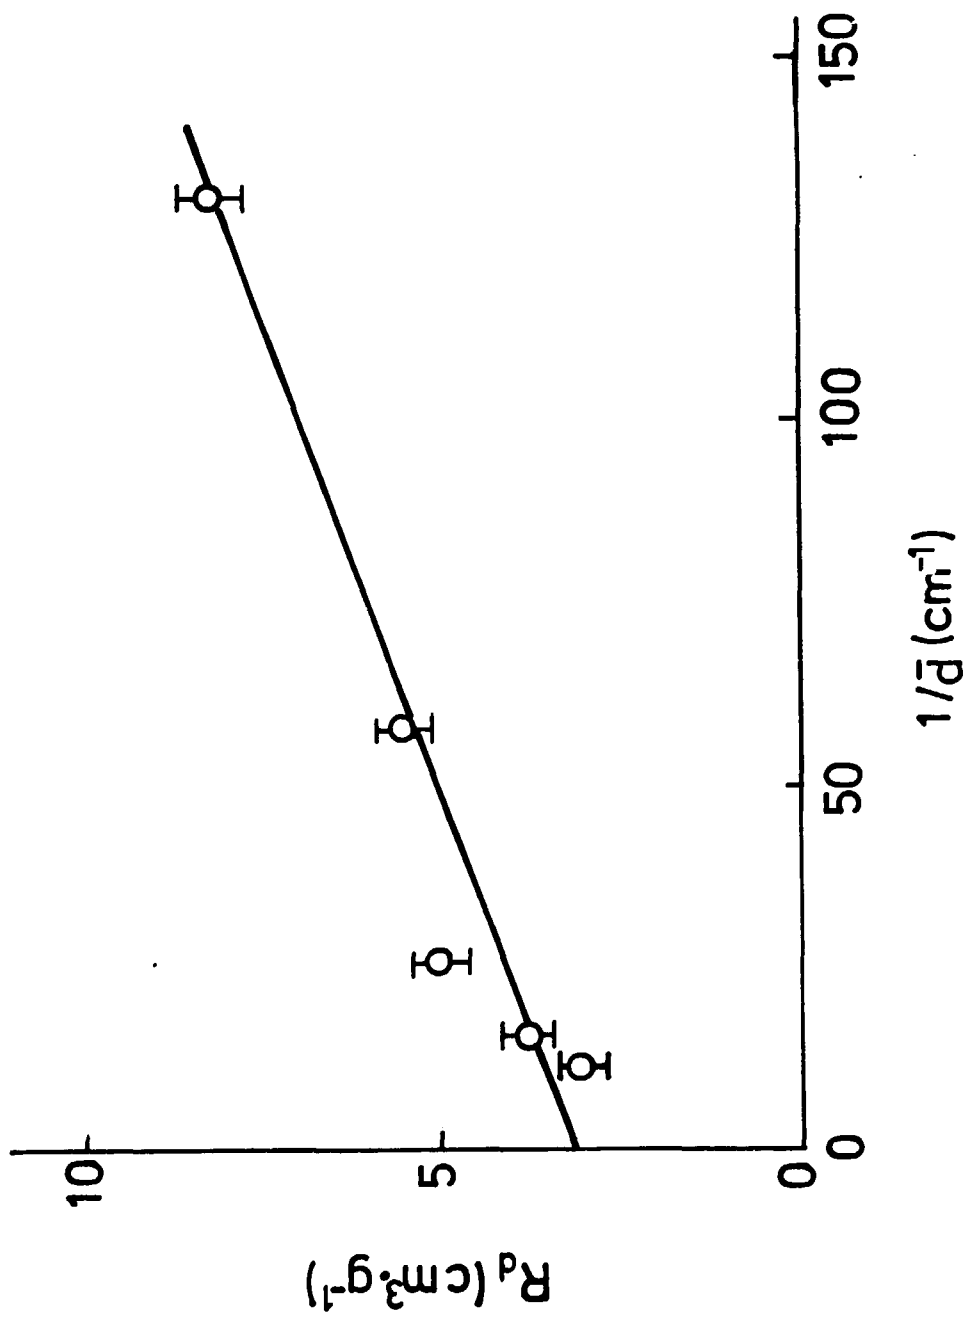


Fig. 9

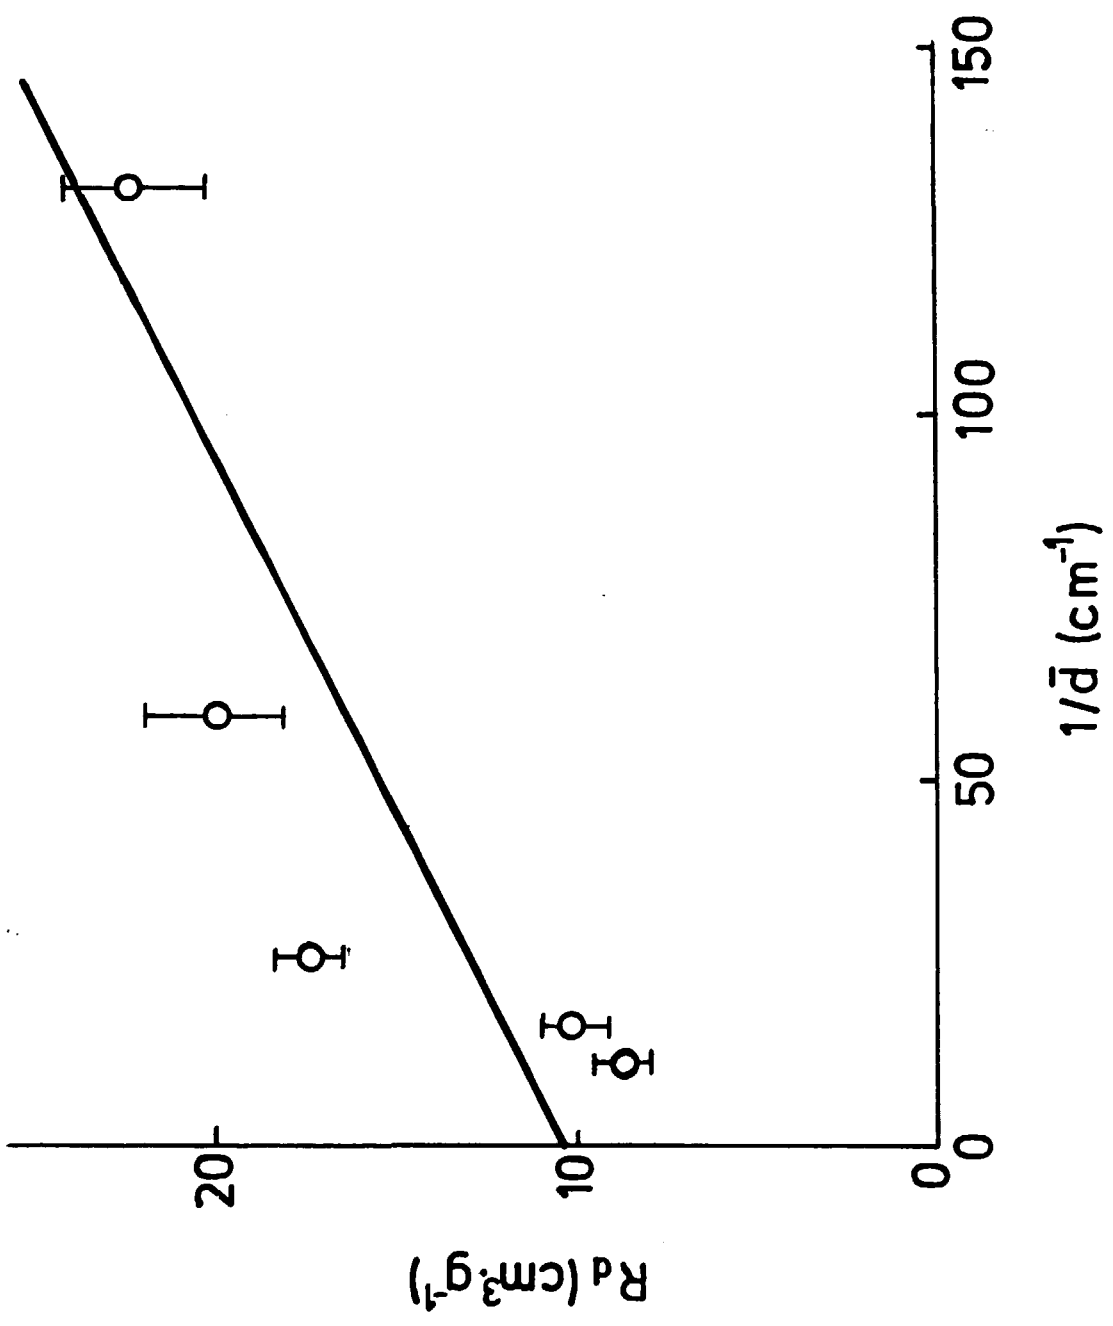


Fig. 10

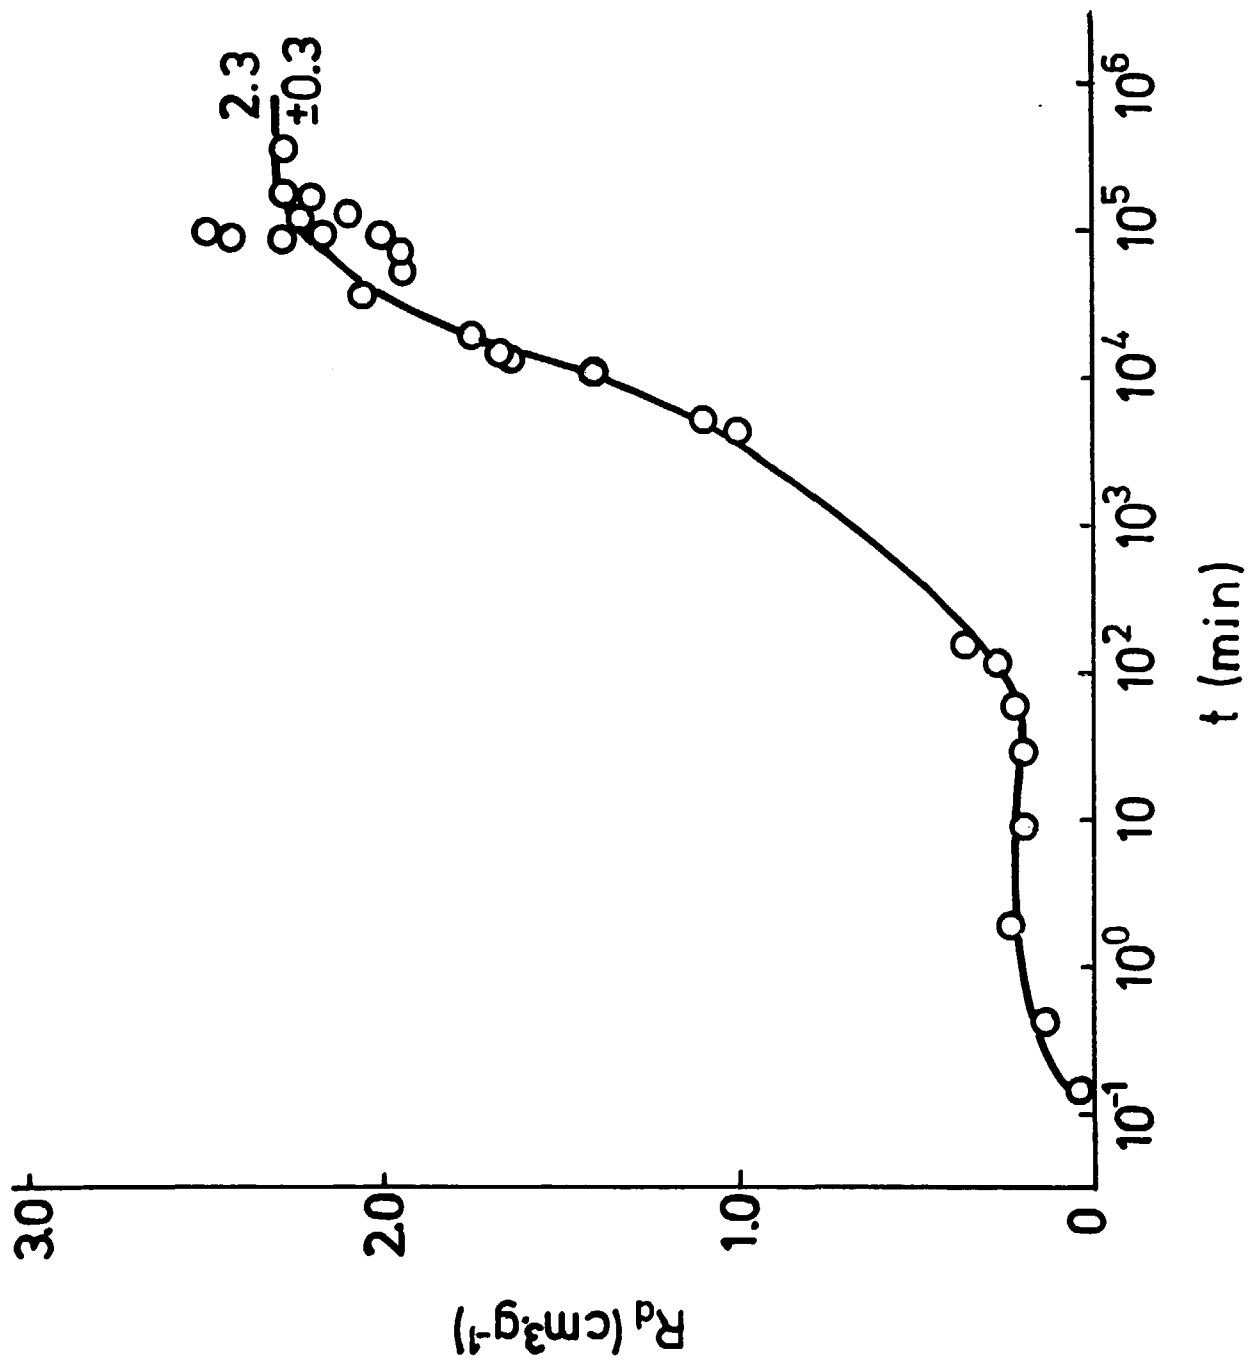


Fig. 11

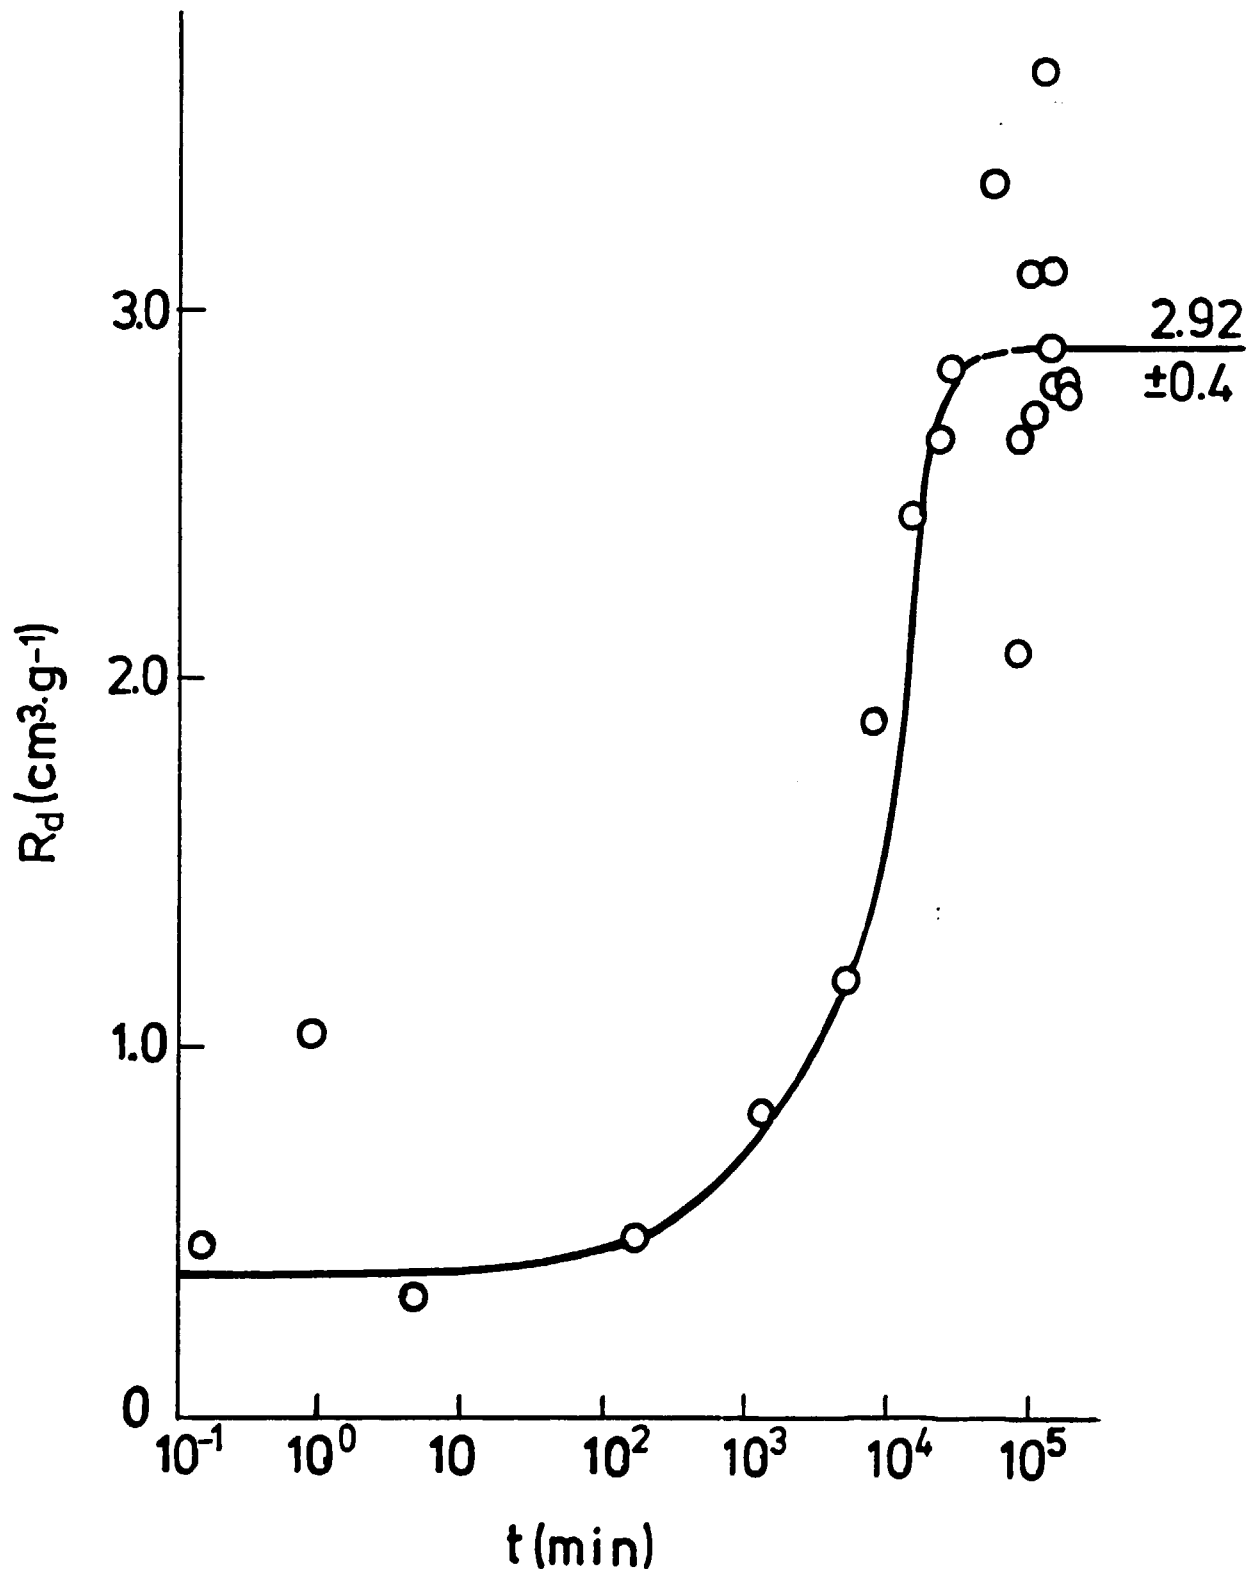


Fig. 12

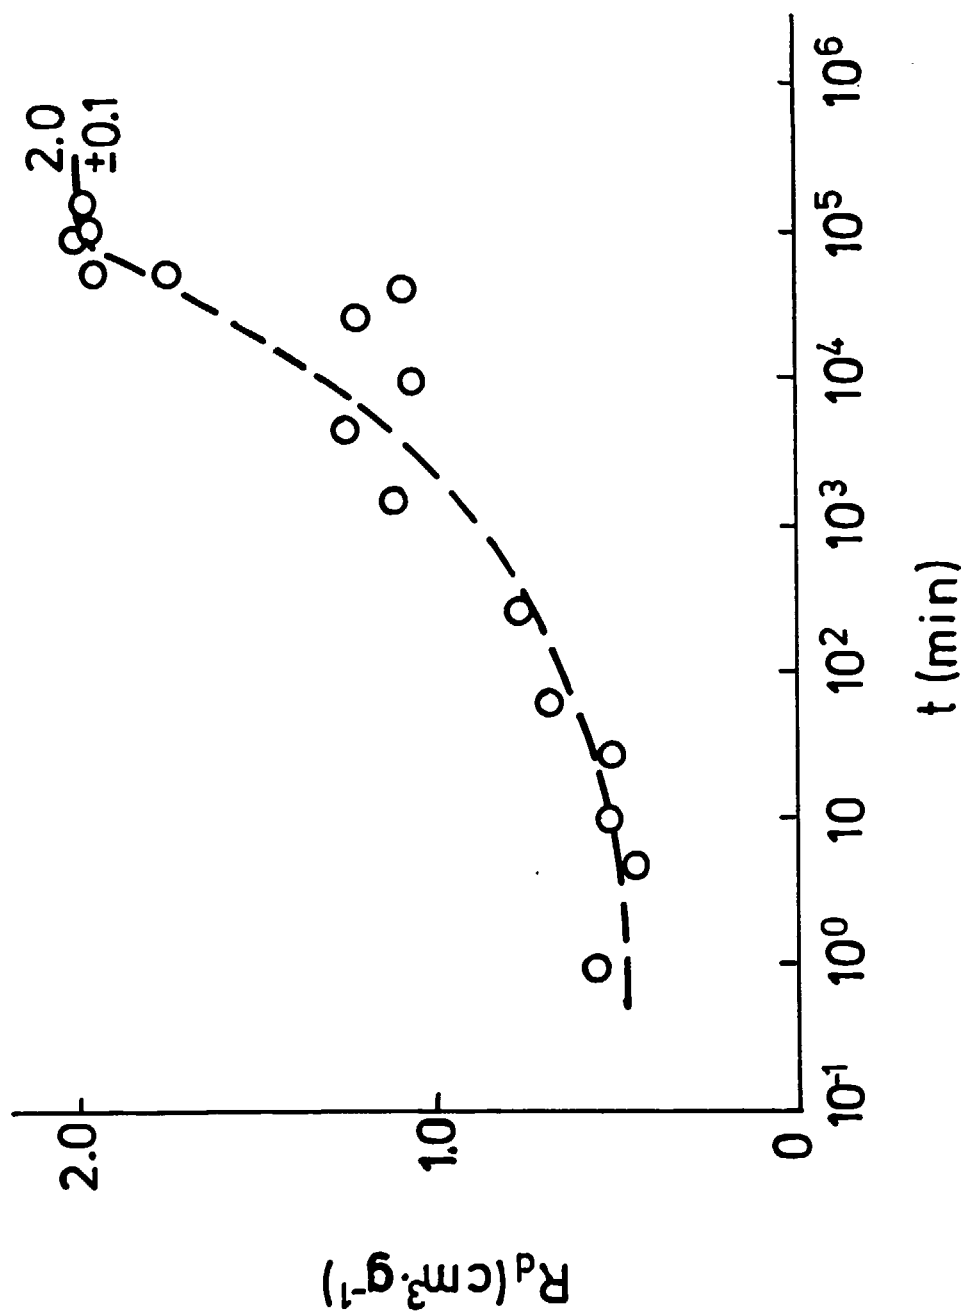


Fig. 13

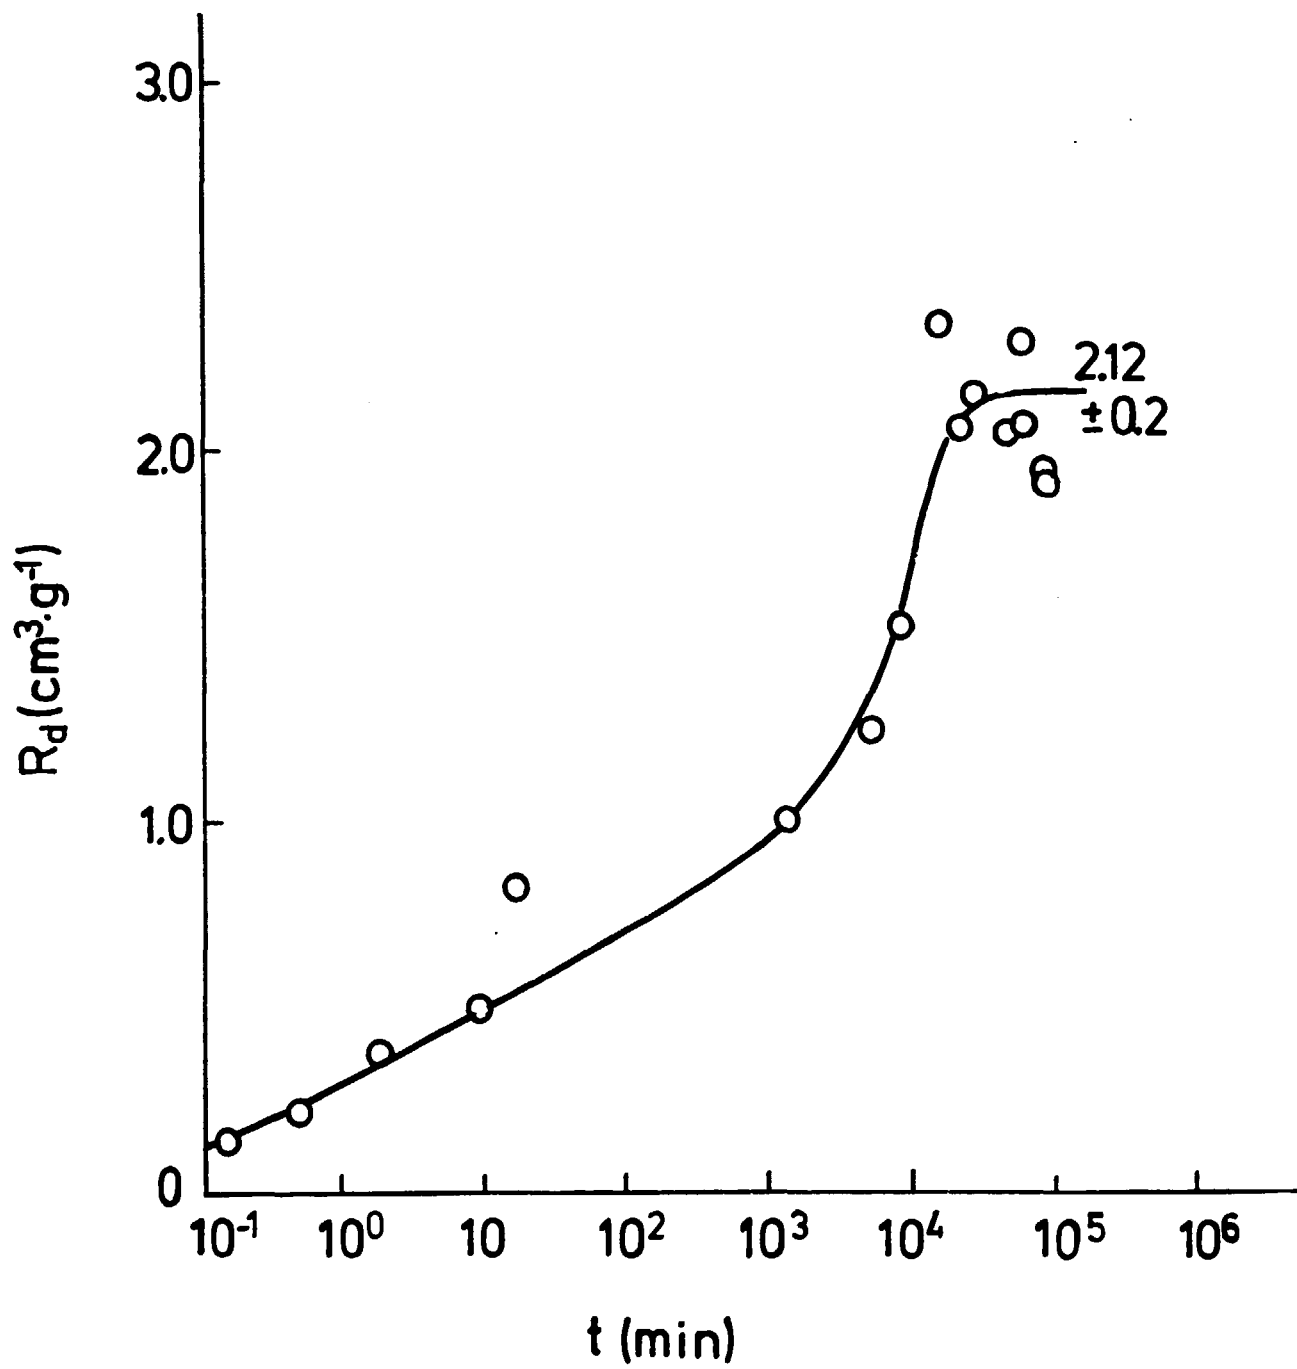


Fig. 14

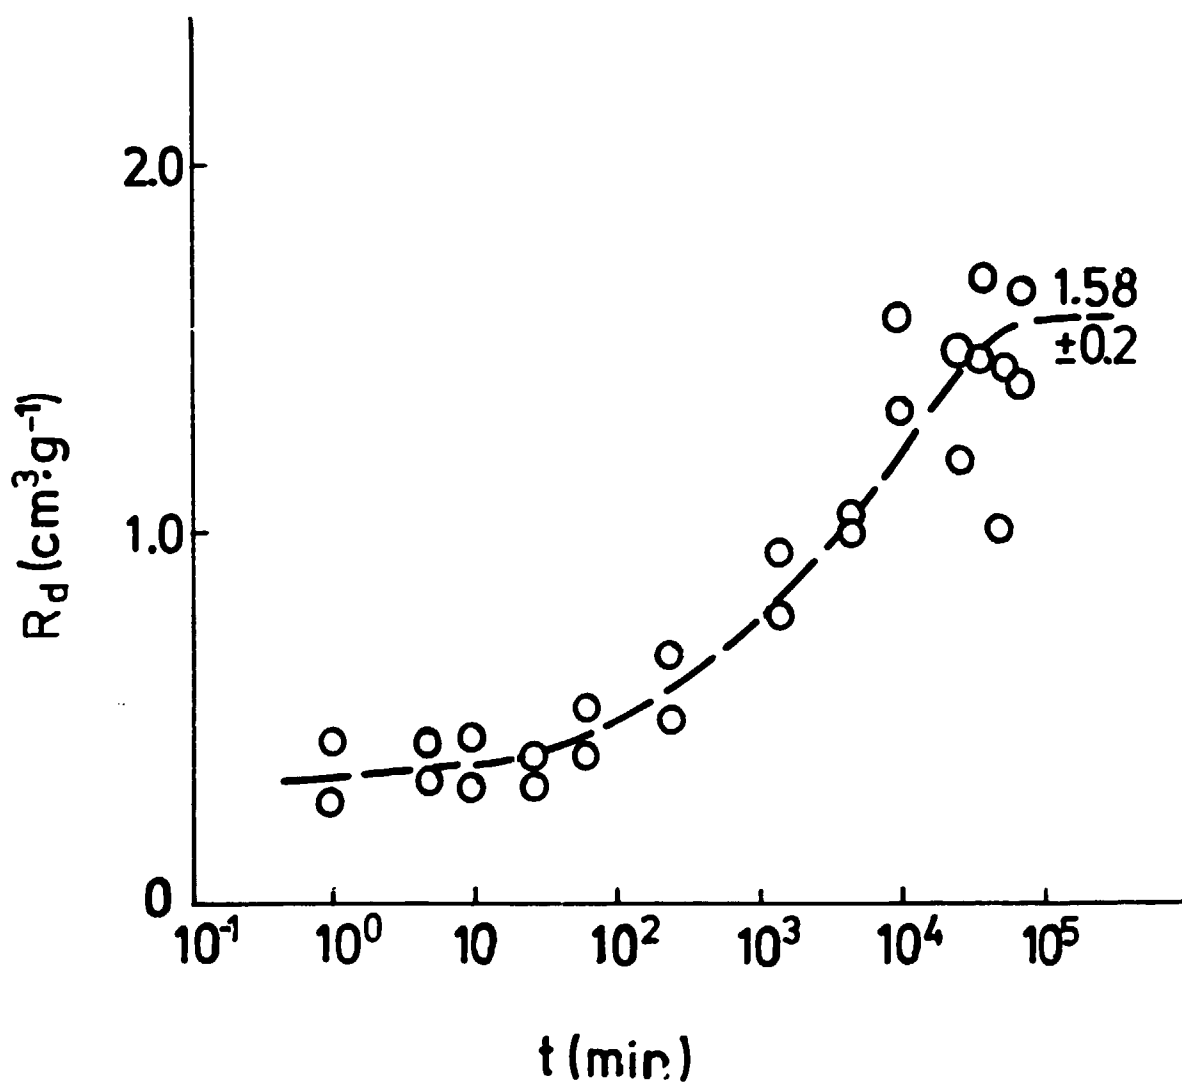


Fig. 15

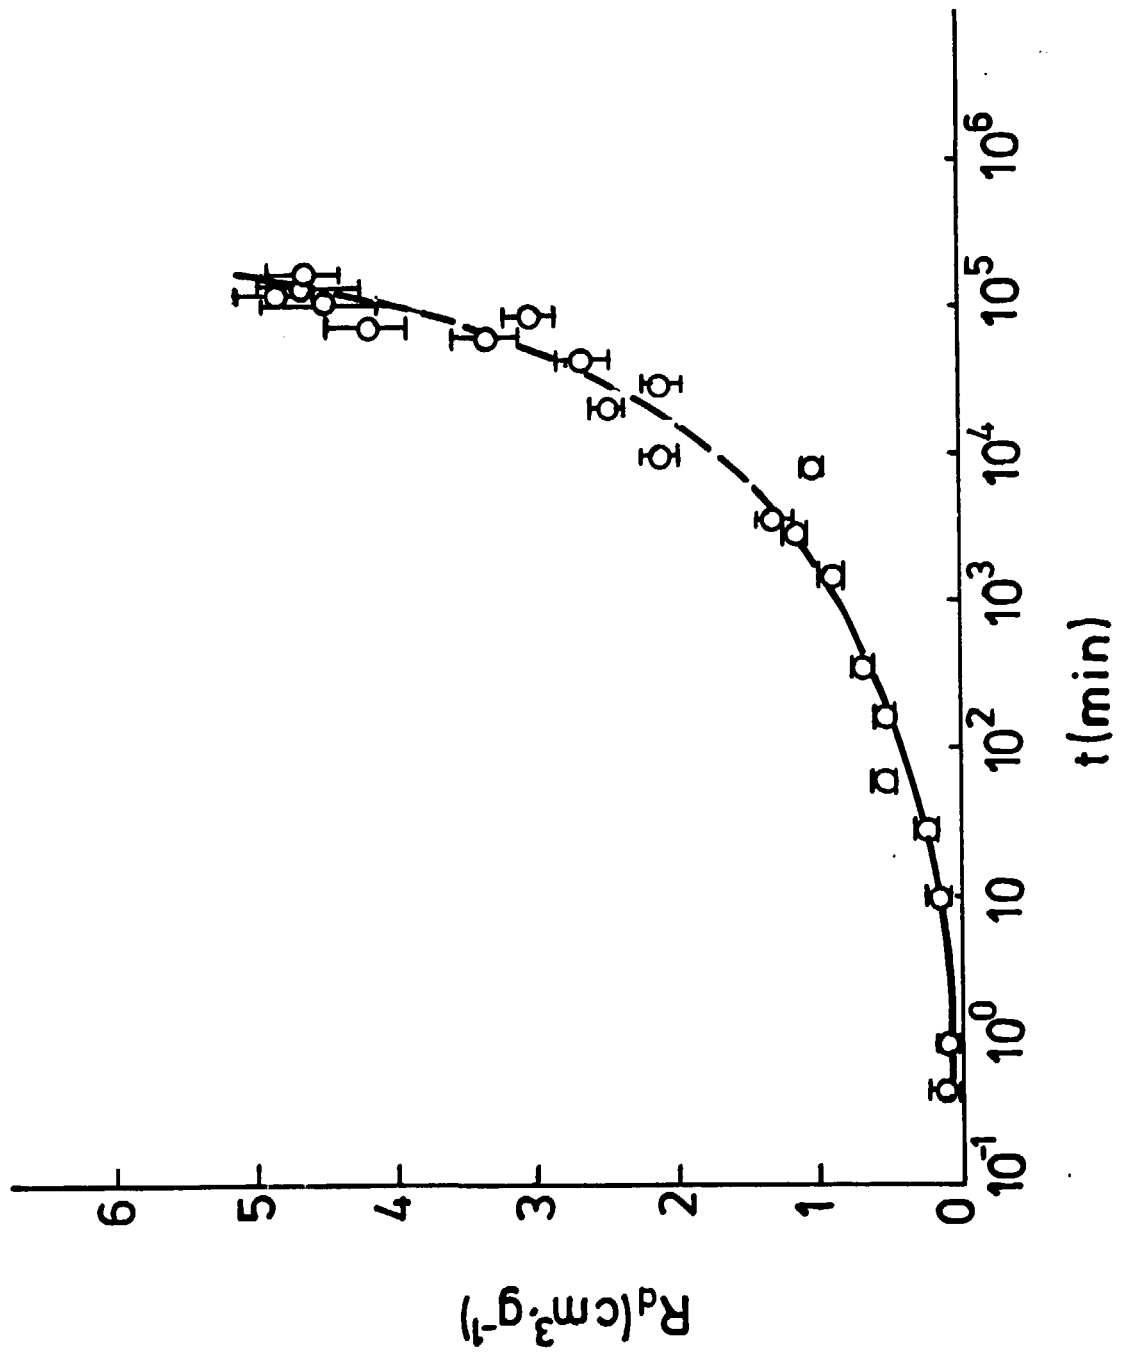


Fig. 16


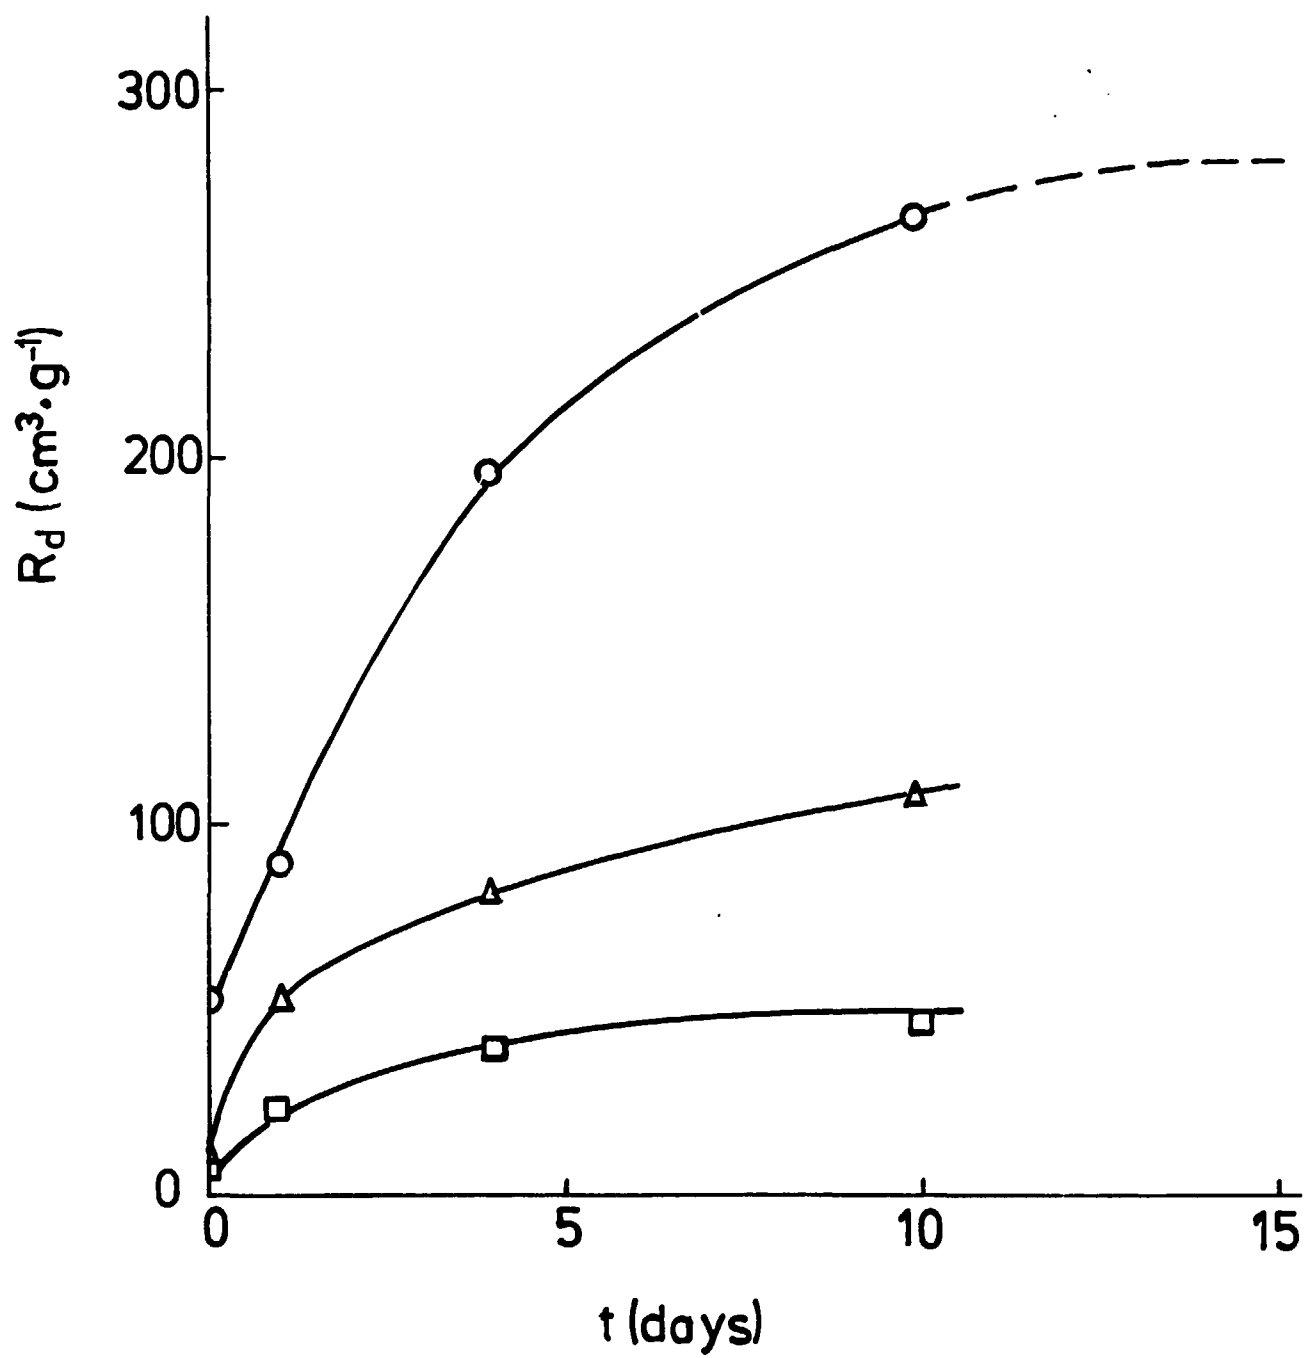


Fig. 17

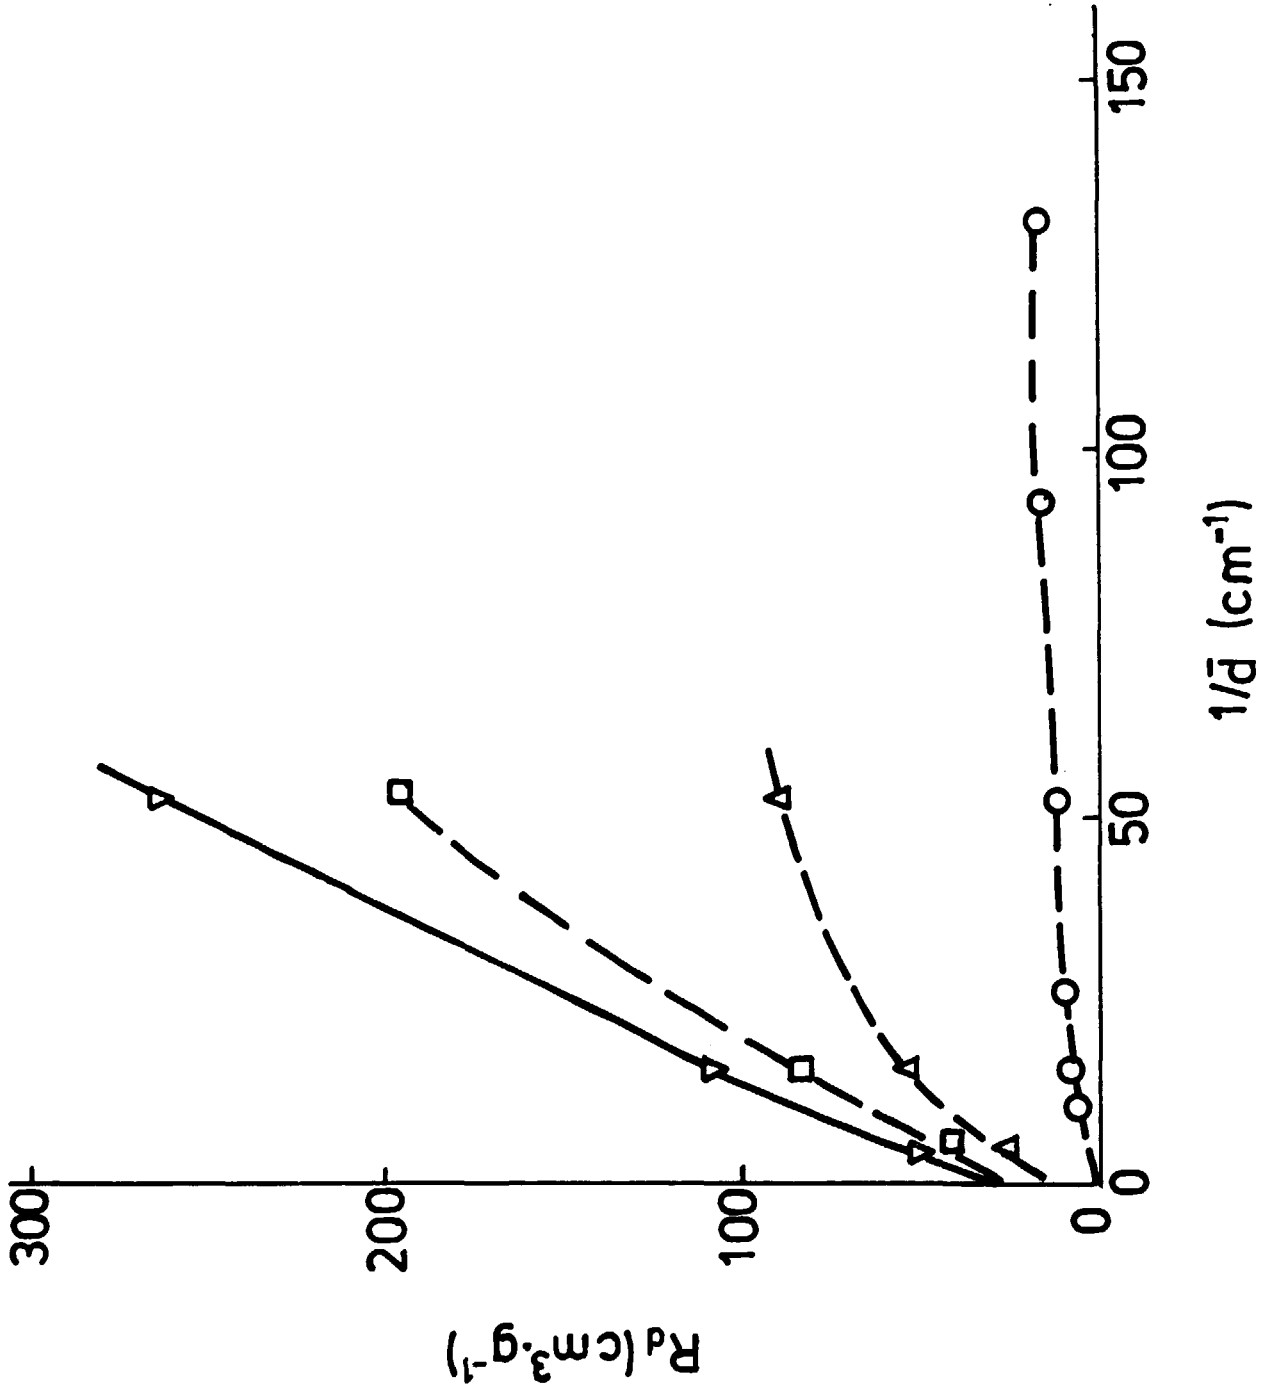

List of SKB reports

Annual Reports

1977-78

TR 121

KBS Technical Reports 1 - 120.

Summaries. Stockholm, May 1979.

1979

TR 79-28

The KBS Annual Report 1979.

KBS Technical Reports 79-01 - 79-27.

Summaries. Stockholm, March 1980.

1980

TR 80-26

The KBS Annual Report 1980.

KBS Technical Reports 80-01 - 80-25.

Summaries. Stockholm, March 1981.

1981

TR 81-17

The KBS Annual Report 1981.

KBS Technical Reports 81-01 - 81-16.

Summaries. Stockholm, April 1982.

1982

TR 82-28

The KBS Annual Report 1982.

KBS Technical Reports 82-01 - 82-27.

Summaries. Stockholm, July 1983.

1983

TR 83-77

The KBS Annual Report 1983.

KBS Technical Reports 83-01 - 83-76

Summaries. Stockholm, June 1984.

1984

TR 85-01

Annual Research and Development Report 1984

Including Summaries of Technical Reports Issued during 1984. (Technical Reports 84-01-84-19)
Stockholm June 1985.

1985

TR 85-20

Annual Research and Development Report 1985

Including Summaries of Technical Reports Issued during 1985. (Technical Reports 85-01-85-19)
Stockholm May 1986.

1986

TR 86-31

SKB Annual Report 1986

Including Summaries of Technical Reports Issued during 1986
Stockholm, May 1987

1987

TR 87-33

SKB Annual Report 1987

Including Summaries of Technical Reports Issued during 1987
Stockholm, May 1988

1988

TR 88-32

SKB Annual Report 1988

Including Summaries of Technical Reports Issued during 1988
Stockholm, May 1989

Technical Reports

1989

TR 89-01

Near-distance seismological monitoring of the Lansjärv neotectonic fault region Part II: 1988

Rutger Wahlström, Sven-Olof Linder,
Conny Holmqvist, Hans-Edy Mårtensson
Seismological Department, Uppsala University,
Uppsala
January 1989

TR 89-02

Description of background data in SKB database GEOTAB

Ebbe Eriksson, Stefan Sehlstedt
SGAB, Luleå
February 1989

TR 89-03

Characterization of the morphology, basement rock and tectonics in Sweden

Kennert Røshoff
August 1988

TR 89-04

SKB WP-Cave Project Radionuclide release from the near-field in a WP-Cave repository

Maria Lindgren, Kristina Skagius
Kemakta Consultants Co, Stockholm
April 1989

TR 89-05

SKB WP-Cave Project Transport of escaping radionuclides from the WP-Cave repository to the biosphere

Luis Moreno, Sue Arve, Ivars Neretnieks
Royal Institute of Technology, Stockholm
April 1989

TR 89-06

**SKB WP-Cave Project
Individual radiation doses from nuclides
contained in a WP-Cave repository for
spent fuel**

Sture Nordlinder, Ulla Bergström
Studsvik Nuclear, Studsvik
April 1989

TR 89-07

**SKB WP-Cave Project
Some Notes on Technical Issues**

- Part 1: Temperature distribution in WP-Cave: when shafts are filled with sand/water mixtures
Stefan Björklund, Lennart Josefson
Division of Solid Mechanics, Chalmers University of Technology, Gothenburg, Sweden
- Part 2: Gas and water transport from WP-Cave repository
Luis Moreno, Ivars Neretnieks
Department of Chemical Engineering, Royal Institute of Technology, Stockholm, Sweden
- Part 3: Transport of escaping nuclides from the WP-Cave repository to the biosphere.
Influence of the hydraulic cage
Luis Moreno, Ivars Neretnieks
Department of Chemical Engineering, Royal Institute of Technology, Stockholm, Sweden

August 1989

TR 89-08

**SKB WP-Cave Project
Thermally induced convective motion in
groundwater in the near field of the
WP-Cave after filling and closure**

Polydynamics Limited, Zürich
April 1989

TR 89-09

**An evaluation of tracer tests performed
at Studsvik**

Luis Moreno¹, Ivars Neretnieks¹, Ove Landström²
¹ The Royal Institute of Technology, Department of
Chemical Engineering, Stockholm
² Studsvik Nuclear, Nyköping
March 1989

TR 89-10

**Copper produced from powder by HIP to
encapsulate nuclear fuel elements**

Lars B Ekbohm, Sven Bogegård
Swedish National Defence Research Establishment
Materials department, Stockholm
February 1989

TR 89-11

**Prediction of hydraulic conductivity and
conductive fracture frequency by multi-
variate analysis of data from the Klipperås
study site**

Jan-Erik Andersson¹, Lennart Lindqvist²
¹ Swedish Geological Co, Uppsala
² EMX-system AB, Luleå
February 1988

TR 89-12

**Hydraulic interference tests and tracer tests
within the Brändan area, Finnsjön study site
The Fracture Zone Project – Phase 3**

Jan-Erik Andersson, Lennart Ekman, Erik Gustafsson,
Rune Nordqvist, Sven Tirén
Swedish Geological Co, Division of Engineering
Geology
June 1988

TR 89-13

**Spent fuel
Dissolution and oxidation
An evaluation of literature data**

Bernd Grambow
Hanh-Meitner-Institut, Berlin
March 1989

TR 89-14

**The SKB spent fuel corrosion program
Status report 1988**

Lars O Werme¹, Roy G Forsyth²
¹ SKB, Stockholm
² Studsvik AB, Nyköping
May 1989

TR 89-15

**Comparison between radar data and
geophysical, geological and hydrological
borehole parameters by multivariate
analysis of data**

Serje Carlsten, Lennart Lindqvist, Olle Olsson
Swedish Geological Company, Uppsala
March 1989

TR 89-16

**Swedish Hard Rock Laboratory –
Evaluation of 1988 year pre-investigations
and description of the target area, the
island of Åspö**

Gunnar Gustafsson, Roy Stanfors, Peter Wikberg
June 1989

TR 89-17

**Field instrumentation for hydrofracturing stress measurements
Documentation of the 1000 m hydrofracturing unit at Luleå University of Technology**

Bjarni Bjarnason, Arne Torikka
August 1989

TR 89-18

Radar investigations at the Saltsjötunnel – predictions and validation

Olle Olsson¹ and Kai Palmqvist²
¹ Abem AB, Uppsala, Sweden
² Bergab, Göteborg
June 1989

TR 89-19

Characterization of fracture zone 2, Finnsjön study-site

Editors: K. Ahlbom, J.A.T. Smellie, Swedish Geological Co, Uppsala

Part 1: Overview of the fracture zone project at Finnsjön, Sweden

K. Ahlbom and J.A.T. Smellie. Swedish Geological Company, Uppsala, Sweden.

Part 2: Geological setting and deformation history of a low angle fracture zone at Finnsjön, Sweden

Sven A. Tirén. Swedish Geological Company, Uppsala, Sweden.

Part 3: Hydraulic testing and modelling of a low-angle fracture zone at Finnsjön, Sweden
J-E. Andersson¹, L. Ekman¹, R. Nordqvist¹ and A. Winberg²

¹ Swedish Geological Company, Uppsala, Sweden

² Swedish Geological Company, Göteborg, Sweden

Part 4: Groundwater flow conditions in a low angle fracture zone at Finnsjön, Sweden

E. Gustafsson and P. Andersson. Swedish Geological Company, Uppsala, Sweden

Part 5: Hydrochemical investigations at Finnsjön, Sweden

J.A.T. Smellie¹ and P. Wikberg²

¹ Swedish Geological Company, Uppsala, Sweden

² Swedish Nuclear Fuel and Waste Management Company, Stockholm, Sweden

Part 6: Effects of gas-lift pumping on hydraulic borehole conditions at Finnsjön, Sweden

J-E. Andersson, P. Andersson and E. Gustafsson. Swedish Geological Company, Uppsala, Sweden

August 1989

TR 89-21

Rock quality designation of the hydraulic properties in the near field of a final repository for spent nuclear fuel

Hans Carlsson¹, Leif Carlsson¹, Roland Pusch²
¹ Swedish Geological Co, SGAB, Gothenburg, Sweden

² Clay Technology AB, Lund, Sweden
June 1989

TR 89-22

Diffusion of Am, Pu, U, Np, Cs, I and Tc in compacted sand-bentonite mixture

Department of Nuclear Chemistry, Chalmers University of Technology, Gothenburg, Sweden
August 1989

TR 89-23

Deep ground water microbiology in Swedish granitic rock and it's relevance for radionuclide migration from a Swedish high level nuclear waste repository

Karsten Pedersen
University of Göteborg, Department of Marine microbiology, Gothenburg, Sweden
March 1989

TR 89-24

Some notes on diffusion of radionuclides through compacted clays

Trygve E Eriksen
Royal Institute of Technology, Department of Nuclear Chemistry, Stockholm, Sweden
May 1989

TR 89-20

WP-Cave - Assessment of feasibility, safety and development potential

Swedish Nuclear Fuel and Waste Management Company, Stockholm, Sweden
September 1989

ISSN 0284-3757

CM-Tryck AB, Bromma 1989