

ATTENTION MICROFICHE USER,

The original document from which this microfiche was made was found to contain some imperfections that reduce full comprehension or some of the text despite the good technical quality of the microfiche itself. The failures may be:

- missing or illegible pages/figures;
- wrong pagination;
- poor overall printing quality, etc...

We normally refuse to microfiche such a document and request a replacement document (or page) from the national INIS Centre concerned. However, our experience shows that many months pass before such documents are replaced. Sometimes the Centre is not able to supply a better copy or, in some cases, the pages that were supposed to be missing correspond to a wrong pagination only. We feel that it is better to proceed with distributing the microfiche made of these documents than to withhold them till the imperfections are removed. If the removals are subsequently made then replacement microfiche can be issued. In line with this approach then, our specific practice for microfiching such documents is as follows:

1. A microfiche of an imperfect document will be marked with a special symbol (black circle) on the left of the title. This symbol will appear on all masters and copies of the document (1st fiche and trailer fiches) even if the imperfection is on one fiche of the report only.
2. If the incorrectnesses are not too general the reason will be specified on a sheet such as this, in the space below.
3. The microfiche will be considered as temporary, but sold at the normal price. Replacements, if they can be issued, will be available for purchase at the regular price.
4. A new document will be requested from the supplying Centre.
5. If the Centre can supply the necessary pages/document a new master fiche will be made to permit production of any replacement microfiche that may be required.

The original document from which this microfiche has been prepared has these imperfections:

- | | |
|-------------------------------------|---------------------------------|
| <input type="checkbox"/> | missing pages/figures numbered: |
| <input type="checkbox"/> | wrong pagination |
| <input checked="" type="checkbox"/> | poor overall printing quality |
| <input type="checkbox"/> | combinations of the above |
| <input type="checkbox"/> | other |

INIS Clearinghouse
I.A.E.A.
P.O. Box 100
A-1400, VIENNA
AUSTRIA

LIGHT SCATTERING BY SURFACE PHONONS IN CRYSTALS

DENILSON L. ALBUQUERQUE

Departamento de Física Teórica e Experimental,
Universidade Federal do Rio Grande do Norte, Natal, Brasil

Abstract

Theory of inelastic light scattering by surface acoustic phonons in inhomogeneous crystals is presented. The Green functions are determined by the use of a classical linear response method and used to evaluate the Brillouin cross section. The acoustic modes are found from solutions to the acoustical-wave equation and boundary conditions appropriated. Two light-scattering mechanisms, namely the surface corrugation and bulk elasto-optic effect are analyzed by deriving optical fields which satisfy both the acousto-optically driven wave equation and the electromagnetic boundary conditions. No restrictions are imposed concerning the angle of incidence of the light. Some representative computed Brillouin lineshapes are also presented and their features discussed.

Introduction

Two different techniques of inelastic light scattering spectroscopy have been developed for the study of acoustic phonons at the surface of opaque and transparent materials. The first one, backscattering of light from thermally excited phonons, gives information about both bulk and surface displacements: the coupling mechanism between light and phonons may be due either to the elasto-optic effect [1-2] or to the presence of mechanical surface ripples [3,4]. The second technique - Brillouin scattering of reflected light - has been used to study acousto-electrically amplified bulk phonons [5,6]. Here the mechanical surface grating is responsible for the scattering [5].

In this communication we focus our attention on the former technique in order to explore the use of Green functions in the problem.

We consider two isotropic media distinguished by surf., M (for $Z > 0$) and M' (for $Z < 0$) and assumed to be in contact along an infinite xy plane ($Z = 0$). The acoustic wavevectors, Z - components for waves of a given frequency ω and identical wavevector X - component Q^x are

$$q_L^z = \left[(\omega/V_L)^2 - Q^{x^2} \right]^{1/2} \quad (1)$$

$$q_T^z = \left[(\omega/V_T)^2 - Q^{x^2} \right]^{1/2}$$

with similar expressions for medium M' . Here V_L and V_T are the longitudinal and transverse velocities of the acoustic wave medium M .

2. Elasto-Optic Scattering

If the medium M' is fairly transparent, the light scattering cross section is dominated by the coupling to the light via the variation of the dielectric susceptibility. The polarization \vec{P}_s produced by the interaction between the incident light and the crystal excitation in the medium is given by

$$P_s^i = - \epsilon_0 n^4 p^{ijkl} E_I^j u^{kl} \quad (2)$$

where n is the refractive index, p is the elasto-optic tensor, E_I the electric vector of the incident light and $u^{kl} = \partial u^k / \partial x^l$ is the gradient of the displacement u^k .

The power spectra or correlation functions for the displacement gradient are obtained by application of the generalised fluctuation-dissipation theorem [4]

$$\langle u^{ij}(Q^z) u^{kl}(Q'^z)^* \rangle_{Q^x, \omega} = (i\hbar/2\pi) [n(\omega) + 1] \times$$

$$\left[\langle\langle u^{kl}(Q^z); u^{ij}(Q'^z)^* \rangle\rangle_{Q^x, \omega} - \langle\langle u^{ij}(Q^z); u^{kl}(Q'^z)^* \rangle\rangle_{Q^x, \omega} \right] \quad (3)$$

where $n(\omega) + 1 = k_B T / \hbar \omega$ is the Bose-Einstein thermal factor. Here $\langle\langle \dots \rangle\rangle$ is the quantum-mechanical Green function as defined by Zubarev [7].

The cross section is now obtained by the use of (3) together with its usual definition [8] in order to get the form of the Brillouin lineshapes as shown in figure 1.

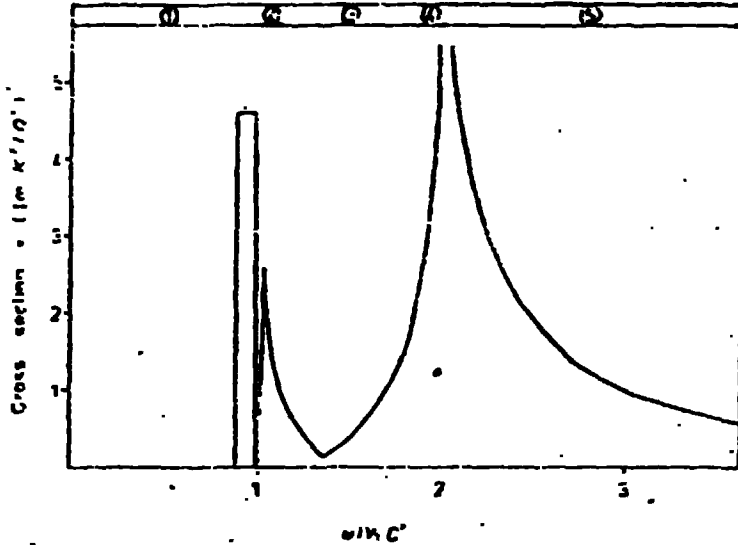


Figure 1 - Light scattering cross section, elasto-optic mechanism. The rectangle shows the integrated area of the surface peak of the Stoneley type.

3. Surface - Ripple Scattering

For highly absorbing materials M' (metals for example) the cross section is due to the surface - ripples induced by the displacement component normal to the surface. The surface - ripple amplitude is a statistical quantity whose mean - square value is calculated by use of the fluctuation - dissipation theorem

$$\langle |u^2(0)|^2 \rangle_{Q_x^x W} = \frac{\hbar}{\pi} [n(k)+1] I_m \langle\langle u^2(0); u^2(0)^* \rangle\rangle_{Q_x^x W} \quad (4)$$

The shape of the spectrum for this case is determined by (4) and this is plotted as a function of the dimensionless parameter $W/V_T Q^x$ in figure 2.

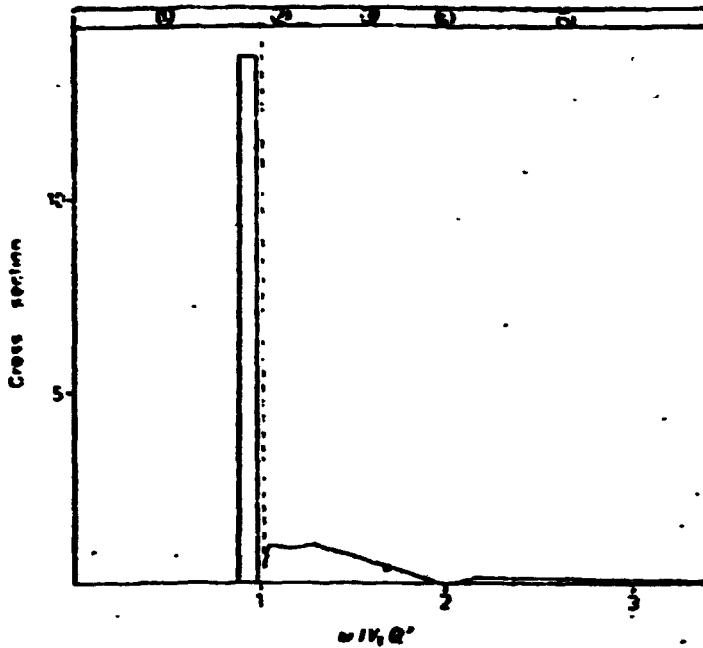


Figure 2 - Light scattering cross section, surface - ripple mechanism

4. Conclusion

We have presented in a summarized way, a theory of light scattering from two media with elastic isotropy. The theory takes into account the elasto - optic and surface - ripple mechanism in the cross section but interference term between these two scattering processes, is not considered here [9]. Unfortunately there are so no experimental measurements by light scattering spectroscopy that can be compared with our theoretical predictions.

REFERENCES

- (1) E.L. Albuquerque, R. Loudon and D.R. Tilley, J. Phys. C: Solid St. Phys. 12 5297 (1979)
- (2) E.L. Albuquerque, R. Loudon and D.R. Tilley, J. Phys. C: Solid St. Phys. 13, 1775 (1980)
- (3) R. Loudon, Phys. Rev. Lett. 40, 581 (1978)
- (4) E.L. Albuquerque, J. Phys. C: Solid St. Phys. 13, 2623 (1980)
- (5) S. Mishra and R. Bray, Phys. Rev. Lett. 39, 222 (1977)
- (6) S. Mishra, R. Bray and M.F. Bishop, in "Lattice Dynamics", ed. M. Balkanski (Flammarion, Paris, 1978) p. 334
- (7) D.N. Zubarev, Sov. Phys. Usp. 3, 320 (1960)
- (8) W. Hayes and R. Loudon, "Scattering of Light by Crystals",
- (9) E.L. Albuquerque, to be published.