

Carbon Sheet Pumping

N. Ohyabu, A. Sagara, T. Ono, T. Kawamura and O. Motojima

(Received – June 25, 1993)

NIFS-237

July 1993

This report was prepared as a preprint of work performed as a collaboration research of the National Institute for Fusion Science (NIFS) of Japan. This document is intended for information only and for future publication in a journal after some rearrangements of its contents.

Inquiries about copyright and reproduction should be addressed to the Research Information Center, National Institute for Fusion Science, Nagoya 464-01, Japan.

CARBON SHEET PUMPING

N. Ohyabu, A. Sagara, T. Ono*, T. Kawamura, O. Motojima

National Institute for Fusion Science

Nagoya, Japan

* Nagoya University

ABSTRACT. A new hydrogen pumping scheme has been proposed which controls recycling of the particles for significant improvement of the energy confinement in toroidal magnetic fusion devices. In this scheme, a part of the vacuum vessel surface near the divertor is covered with carbon sheets of a large surface area. Before discharge initiation, the sheets are baked up to $700 \sim 1000 \text{ C}^{\circ}$ to remove the previously trapped hydrogen atoms. After being cooled down to below $\sim 200 \text{ C}^{\circ}$, the unsaturated carbon sheets trap high energy charge exchange hydrogen atoms effectively during a discharge and overall pumping efficiency can be as high as $\sim 50 \%$.

Keywords:

carbon wall, hydrogen pumping, divertor, recycling control, confinement enhancement, charge exchange,

Improvement of the energy confinement is the major issue in the magnetic fusion research. Several discharge modes with improved confinement have been achieved such as H-mode [1], supershot [2], pellet mode [3], counter-beam injection [4]. The common feature among these modes is lower recycling at the divertor plate or limiter, compared with non-improved discharges with comparable average densities. As the extreme operational mode of this type, N. Ohya has proposed high temperature divertor plasma operation [5,6], in which highly efficient pumping allows low recycling and hence high divertor plasma temperature of 5 ~ 10 keV. The resultant high edge temperature is expected to lead to a significant improvement in the core energy confinement. This operation requires highly efficient pumping of 20 ~ 50 % which lasts during a discharge, i.e., 5 ~ 10 seconds.

For this purpose, we have proposed a carbon sheet pumping scheme in which high energy charge exchange hydrogen atoms are implanted into the carbon sheets (two dimensionally weaved carbon composites) placed on the vacuum vessel. Overall pumping efficiency can be as high as ~ 50 %. The idea originates from A. Sagara's proposal to a small tokamak program "carbon limiter with external heater". Normally a carbon surface is saturated with hydrogen atoms and thus has no further trapping of hydrogen. This saturation level, however, decreases with increasing temperature. Figure 1 shows saturated deposition profiles of hydrogen atoms at two different temperatures, 30 C⁰ and 700 C⁰ [7]. This means that most of hydrogen atoms in the saturated carbon surface at low temperature will be released easily when the surface is heated up to 700 C⁰, otherwise difficult. Thus after this treatment, a "cold" carbon limiter becomes a good absorber of impinging hydrogen ions and will influence tokamak discharge performance. (The basic data on hydrogen trapping-desorption properties of carbon are to be published elsewhere [7]). Unfortunately this proposed experiment was not

executed.

The main drawback of this approach, if it is applied to large devices, is a short limited time of the pumping because the temperature of limiter or divertor plate surfaces exceeds $\sim 700\text{ C}^\circ$ very quickly. Instead of pumping plasma ions impinging on the small surface area of the divertor plate or limiter, carbon sheets which cover a significant portion of the vessel surface, as shown in Fig. 2., are used to trap charge exchange neutrals for hydrogen pumping. In this case, surface temperature of the carbon sheets can be maintained below 200 C° (acceptably low temperature for this purpose) for ~ 10 seconds, typical discharge duration time for the present large devices. We have estimated pumping efficiency of this scheme for the DIII-D divertor geometry [9] shown in Fig. 2(a), using the DEGAS code [8]. Equal number of neutral hydrogen atoms are emitted from two inner and outer divertor legs and their movements are traced until they are ionized in the plasma or trapped by the carbon sheets placed on the lower half of the vessel surface. The dominant atomic processes of hydrogen neutrals in this estimation are ionization by plasma particles and charge exchange with plasma ions. The hydrogen trapping rate of carbon depends on the energy of the impinging hydrogen atoms. The pumping efficiency, defined by a fraction of the atoms emitted from the divertor legs being trapped by the sheets, increases with increasing edge plasma temperature, as shown in Fig.2(b). The efficiency can be as high as $\sim 50\%$ when the edge plasma temperature is greater than a few keV. High pumping efficiency at the high edge temperature is due to the fact that the ionization probability of neutral hydrogen particles relative to the charge exchange probability decreases with increasing plasma temperature. Furthermore, the hydrogen trapping rate of the carbon is high, close to 90% at the incident energy greater than 1 keV . The pumping capacity is also high at high edge plasma temperature. This is because the average energy of the charge exchange hydrogen atoms is high and thus they penetrate deeply into

the carbon sheets, thus increasing the width of the surface layer saturated with hydrogen atoms. Thus this pumping scheme is ideal for high temperature divertor operation.

The basic reason why carbon sheets are used instead of the conventional thick carbon tiles is purely technical reason. Baking thick tiles installed on the vessel, up to $700 \sim 1000 \text{ C}^\circ$ is a very difficult task. The sheets can be baked easily by a direct drive of current running through them. In this context, thinner ones are better. But its temperature needs to be below, e.g., 200 C° for maintaining a good pumping capability during a discharge, requiring a few mm thickness for an expected charge exchange neutral particle heat flux. We are working to demonstrate technical feasibility of the carbon sheet in large toroidal devices, in particular in LHD [10,11]. Since the recycling control is the key for high plasma performance in the present large devices [12], the proposed carbon sheet pumping could become a powerful experimental tool for this purpose.

References

- [1] WAGNER,F., BECKER,G., BEHRINGER,K., CAMPBELL,D.,
EBERHAGEN,K.,, et al. Phys. Rev. Lett. 53 (1984) 1453.
- [2] STRACHAN,J.D., BITTER,M., RAMSEY, A.T., ZARNSTORFF,M.C.,
ARUNASALAM,V., et al., Phys. Rev. Lett. 58 (1987) 1004.
- [3] GREENWALD,M., GWINN,D., MILORA,S., PARKER,J., PARKER,R.,
et al., Plasma Physics and Controlled Nuclear Fusion Research 1984
(Proc. 10th Int. Conf. London, 1884) Vol.1, IAEA, Vienna (1985) 45.
- [4] FUSSMANN,G., GRUBER,O., NIEDERMEYER,H., SOLDNER,F.X.,
STABLER,A., et al., Plasma Physics and Controlled Nuclear Fusion
Research 1988 (Proc. 12th Int. Conf. Nice, 1888) Vol.1, IAEA, Vienna
(1989) 145.
- [5] OHYABU,N., NODA,N., JI HANTAO, AKAO,H., AKAISHI, K., et al.,
J. Nucl. Mater. 196-198 (1992) 276.
- [6] OHYABU,N., YAMAZAKI,K., KATANUMA,I., JI,H., WATANABE,
T., et al., in Plasma Physics and Controlled Nuclear Fusion Research
1992, IAEA-CN-56 / C-4-2.
- [7] SAGARA,A., to be published.

- [8] HEIFETZ,D., J. Comput. Phys. 42 (1982) 309.
- [9] ALLEN,S.L.,RENSINK,M.E.HILL,D.,N.,PERKINS,D.,E.,
JACKSON,G.L., ALI MAHDAVI,M., J. Nucl. Mater. 162-164 (1989) 80.
- [10] IYOSHI,A., FUJIWARA, M., MOTOJIMA, O., OHYABU, N. and
YAMAZAKI, Fusion Technology 17 (1990) 169.
- [11] MOTOJIMA,O., AKAISHI,K., FUJII,K., FUJIWAKA, S.,
IMAGAWA,S., et al., Fusion Engineering and Design 20 (1993) 3.
- [12] SHIMADA, M., in Plasma Physics and Controlled Nuclear Fusion
Research 1992, IAEA-CN-56 / A-1-3.

Figure Captions

Fig.1 Saturated depth profiles of deuterium at the graphite surface when 1.5 keV deuterium ions are injected. They are measured by ERD (Electric Recoil Detection) method with 1.5 MeV He⁺ ions.

Fig.2 Numerical estimation of the pumping efficiency of the carbon sheet.

(a) DIII-D divertor geometry [9] is used for the estimation.

(b) Pumping efficiency vs. Edge temperature.

For simplicity, both ion and electron temperatures are assumed to be the same (T) and uniform in the entire region including SOL or the divertor channel. The density in the SOL is assumed to be $n_s = 1.25 \times 10^{11} (T(\text{eV}))^{-1.5} \text{ cm}^{-3}$. The density in the core (n_c) is $3.0 \times 10^{13} \text{ cm}^{-3}$ and the densities in region A and B are $(n_c + 2 n_s) / 3$, $(2 n_c + n_s) / 3$, respectively.

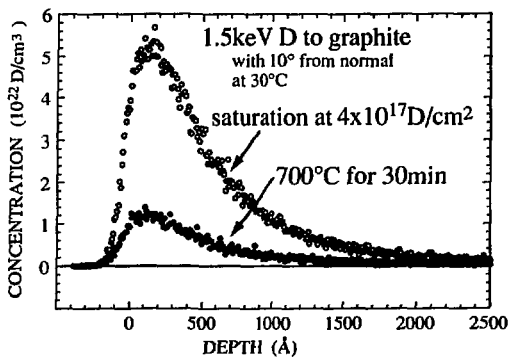


Fig. 1

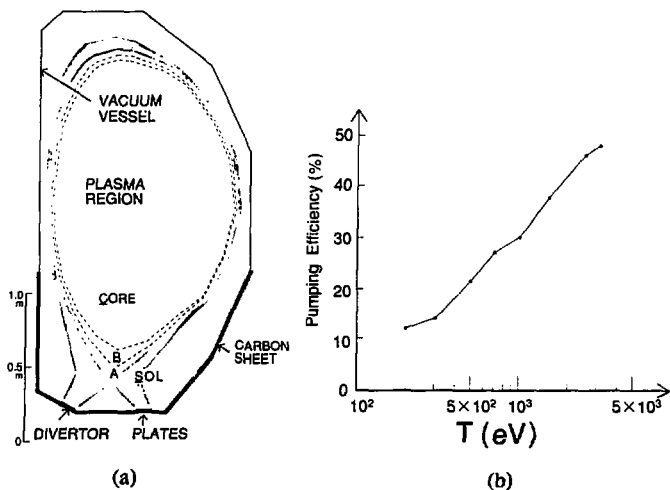


Fig. 2

Recent Issues of NIFS Series

- NIFS-186 S. Morita, H. Yamada, H. Iguchi, K. Adati, R. Akiyama, H. Arimoto, M. Fujiwara, Y. Hamada, K. Ida, H. Idei, O. Kaneko, K. Kawahata, T. Kawamoto, S. Kubo, R. Kumazawa, K. Matsuoka, T. Morisaki, K. Nishimura, S. Okamura, T. Ozaki, T. Seki, M. Sakurai, S. Sakakibara, A. Sagara, C. Takahashi, Y. Takeiri, H. Takenaga, Y. Takita, K. Toi, K. Tsumori, K. Uchino, M. Ueda, T. Watari, I. Yamada, *A Role of Neutral Hydrogen in CHS Plasmas with Reheat and Collapse and Comparison with JIPP T-IIU Tokamak Plasmas* ; Sep. 1992
- NIFS-187 K. Itoh, S.-I. Itoh, A. Fukuyama, M. Yagi and M. Azumi, *Model of the L-Mode Confinement in Tokamaks* ; Sep. 1992
- NIFS-188 K. Itoh, A. Fukuyama and S.-I. Itoh, *Beta-Limiting Phenomena in High-Aspect-Ratio Toroidal Helical Plasmas*; Oct. 1992
- NIFS-189 K. Itoh, S. -I. Itoh and A. Fukuyama, *Cross Field Ion Motion at Sawtooth Crash* ; Oct. 1992
- NIFS-190 N. Noda, Y. Kubota, A. Sagara, N. Ohya, K. Akaishi, H. Ji, O. Motojima, M. Hashiba, I. Fujita, T. Hino, T. Yamashina, T. Matsuda, T. Sogabe, T. Matsumoto, K. Kuroda, S. Yamazaki, H. Ise, J. Adachi and T. Suzuki, *Design Study on Divertor Plates of Large Helical Device (LHD)* ; Oct. 1992
- NIFS-191 Y. Kondoh, Y. Hosaka and K. Ishii, *Kernel Optimum Nearly-Analytical Discretization (KOND) Algorithm Applied to Parabolic and Hyperbolic Equations* : Oct. 1992
- NIFS-192 K. Itoh, M. Yagi, S.-I. Itoh, A. Fukuyama and M. Azumi, *L-Mode Confinement Model Based on Transport-MHD Theory in Tokamaks* ; Oct. 1992
- NIFS-193 T. Watari, *Review of Japanese Results on Heating and Current Drive* ; Oct. 1992
- NIFS-194 Y. Kondoh, *Eigenfunction for Dissipative Dynamics Operator and Attractor of Dissipative Structure* ; Oct. 1992
- NIFS-195 T. Watanabe, H. Oya, K. Watanabe and T. Sato, *Comprehensive Simulation Study on Local and Global Development of Auroral Arcs and Field-Aligned Potentials* ; Oct. 1992
- NIFS-196 T. Mori, K. Akaishi, Y. Kubota, O. Motojima, M. Mushiaki, Y. Funato and Y. Hanaoka, *Pumping Experiment of Water on B and LaB₆ Films*

- NIFS-197 T. Kato and K. Masai, *X-ray Spectra from Hinotori Satellite and Suprathermal Electrons* ; Oct. 1992
- NIFS-198 K. Toi, S. Okamura, H. Iguchi, H. Yamada, S. Morita, S. Sakakibara, K. Ida, K. Nishimura, K. Matsuoka, R. Akiyama, H. Arimoto, M. Fujiwara, M. Hosokawa, H. Idei, O. Kaneko, S. Kubo, A. Sagara, C. Takahashi, Y. Takeiri, Y. Takita, K. Tsumori, I. Yamada and H. Zushi, *Formation of H-mode Like Transport Barrier in the CHS Heliotron / Torsatron* ; Oct. 1992
- NIFS-199 M. Tanaka, *A Kinetic Simulation of Low-Frequency Electromagnetic Phenomena in Inhomogeneous Plasmas of Three-Dimensions* ; Nov. 1992
- NIFS-200 K. Itoh, S.-I. Itoh, H. Sanuki and A. Fukuyama, *Roles of Electric Field on Toroidal Magnetic Confinement*, Nov. 1992
- NIFS-201 G. Gnudi and T. Hatori, *Hamiltonian for the Toroidal Helical Magnetic Field Lines in the Vacuum*; Nov. 1992
- NIFS-202 K. Itoh, S.-I. Itoh and A. Fukuyama, *Physics of Transport Phenomena in Magnetic Confinement Plasmas*; Dec. 1992
- NIFS-203 Y. Hamada, Y. Kawasumi, H. Iguchi, A. Fujisawa, Y. Abe and M. Takahashi, *Mesh Effect in a Parallel Plate Analyzer*; Dec. 1992
- NIFS-204 T. Okada and H. Tazawa, *Two-Stream Instability for a Light Ion Beam-Plasma System with External Magnetic Field*; Dec. 1992
- NIFS-205 M. Osakabe, S. Itoh, Y. Gotoh, M. Sasao and J. Fujita, *A Compact Neutron Counter Telescope with Thick Radiator (Cotetra) for Fusion Experiment*; Jan. 1993
- NIFS-206 T. Yabe and F. Xiao, *Tracking Sharp Interface of Two Fluids by the CIP (Cubic-Interpolated Propagation) Scheme*, Jan. 1993
- NIFS-207 A. Kageyama, K. Watanabe and T. Sato, *Simulation Study of MHD Dynamo : Convection in a Rotating Spherical Shell*; Feb. 1993
- NIFS-208 M. Okamoto and S. Murakami, *Plasma Heating in Toroidal Systems*; Feb. 1993
- NIFS-209 K. Masai, *Density Dependence of Line Intensities and Application to Plasma Diagnostics*; Feb. 1993
- NIFS-210 K. Ohkubo, M. Hosokawa, S. Kubo, M. Sato, Y. Takita and T. Kuroda,

- NIFS-211 A. A. Shishkin, K. Y. Watanabe, K. Yamazaki, O. Motojima, D. L. Grekov, M. S. Smirnova and A. V. Zolotukhin, *Some Features of Particle Orbit Behavior in LHD Configurations*; Mar. 1993
- NIFS-212 Y. Kondoh, Y. Hosaka and J.-L. Liang, *Demonstration for Novel Self-organization Theory by Three-Dimensional Magnetohydrodynamic Simulation*; Mar. 1993
- NIFS-213 K. Itoh, H. Sanuki and S.-I. Itoh, *Thermal and Electric Oscillation Driven by Orbit Loss in Helical Systems*; Mar. 1993
- NIFS-214 T. Yamagishi, *Effect of Continuous Eigenvalue Spectrum on Plasma Transport in Toroidal Systems*; Mar. 1993
- NIFS-215 K. Ida, K. Itoh, S.-I. Itoh, Y. Miura, JFT-2M Group and A. Fukuyama, *Thickness of the Layer of Strong Radial Electric Field in JFT-2M H-mode Plasmas*; Apr. 1993
- NIFS-216 M. Yagi, K. Itoh, S.-I. Itoh, A. Fukuyama and M. Azumi, *Analysis of Current Diffusive Ballooning Mode*; Apr. 1993
- NIFS-217 J. Guasp, K. Yamazaki and O. Motojima, *Particle Orbit Analysis for LHD Helical Axis Configurations*; Apr. 1993
- NIFS-218 T. Yabe, T. Ito and M. Okazaki, *Holography Machine HORN-1 for Computer-aided Retrieve of Virtual Three-dimensional Image*; Apr. 1993
- NIFS-219 K. Itoh, S.-I. Itoh, A. Fukuyama, M. Yagi and M. Azumi, *Self-sustained Turbulence and L-Mode Confinement in Toroidal Plasmas*; Apr. 1993
- NIFS-220 T. Watari, R. Kumazawa, T. Mutoh, T. Seki, K. Nishimura and F. Shimpo, *Applications of Non-resonant RF Forces to Improvement of Tokamak Reactor Performances Part I: Application of Ponderomotive Force*; May 1993
- NIFS-221 S.-I. Itoh, K. Itoh, and A. Fukuyama, *ELMy-H mode as Limit Cycle and Transient Responses of H-modes in Tokamaks*; May 1993
- NIFS-222 H. Hojo, M. Inutake, M. Ichimura, R. Katsumata and T. Watanabe, *Interchange Stability Criteria for Anisotropic Central-Cell Plasmas in the Tandem Mirror GAMMA 10*; May 1993
- NIFS-223 K. Itoh, S.-I. Itoh, M. Yagi, A. Fukuyama and M. Azumi, *Theory of Pseudo-Classical Confinement and Transmutation to L-Mode*; May

1993

- NIFS-224 M. Tanaka, *HIDENEK: An Implicit Particle Simulation of Kinetic-MHD Phenomena in Three-Dimensional Plasmas*; May 1993
- NIFS-225 H. Hojo and T. Hatori, *Bounce Resonance Heating and Transport in a Magnetic Mirror*; May 1993
- NIFS-226 S.-I. Iton, K. Itoh, A. Fukuyama, M. Yagi, *Theory of Anomalous Transport in H-Mode Plasmas*; May 1993
- NIFS-227 T. Yamagishi, *Anomalous Cross Field Flux in CHS*; May 1993
- NIFS-228 Y. Ohkouchi, S. Sasaki, S. Takamura, T. Kato, *Effective Emission and Ionization Rate Coefficients of Atomic Carbons in Plasmas*; June 1993
- NIFS-229 K. Itoh, M. Yagi, A. Fukuyama, S.-I. Iton and M. Azumi, *Comment on 'A Mean Field Ohm's Law for Collisionless Plasmas*; June 1993
- NIFS-230 H. Idei, K. Ida, H. Sanuki, H. Yamada, H. Iguchi, S. Kubo, R. Akiyama, H. Arimoto, M. Fujiwara, M. Hosokawa, K. Matsuoka, S. Morita, K. Nishimura, K. Ohkubo, S. Okamura, S. Sakakibara, C. Takahashi, Y. Takita, K. Tsumori and I. Yamada, *Transition of Radial Electric Field by Electron Cyclotron Heating in Stellarator Plasmas*; June 1993
- NIFS-231 H.J. Gardner and K. Ichiguchi, *Free-Boundary Equilibrium Studies for the Large Helical Device*, June 1993
- NIFS-232 K. Itoh, S.-I. Iton, A. Fukuyama, H. Sanuki and M. Yagi, *Confinement Improvement in H-Mode-Like Plasmas in Helical Systems*, June 1993
- NIFS-233 R. Horuchi and T. Sato, *Collisionless Driven Magnetic Reconnection*, June 1993
- NIFS-234 K. Itoh, S.-I. Iton, A. Fukuyama, M. Yagi and M. Azumi, *Prandtl Number of Toroidal Plasmas*; June 1993
- NIFS-235 S. Kawata, S. Kato and S. Kiyokawa, *Screening Constants for Plasma*; June 1993
- NIFS-236 A. Fujisawa and Y. Hamada, *Theoretical Study of Cylindrical Energy Analyzers for MeV Range Heavy Ion Beam Probes*; July 1993