


Molten Salt Destruction as an Alternative
to Open Burning of
Energetic Material Wastes

Ravindra S. Upadhye
Bruce E. Watkins
César O. Pruneda
William A. Brummond

This paper was prepared for submittal
to the I&EC Special Symposium
American Chemical Society
Atlanta, GA
September 19-21, 1994

July 5, 1994

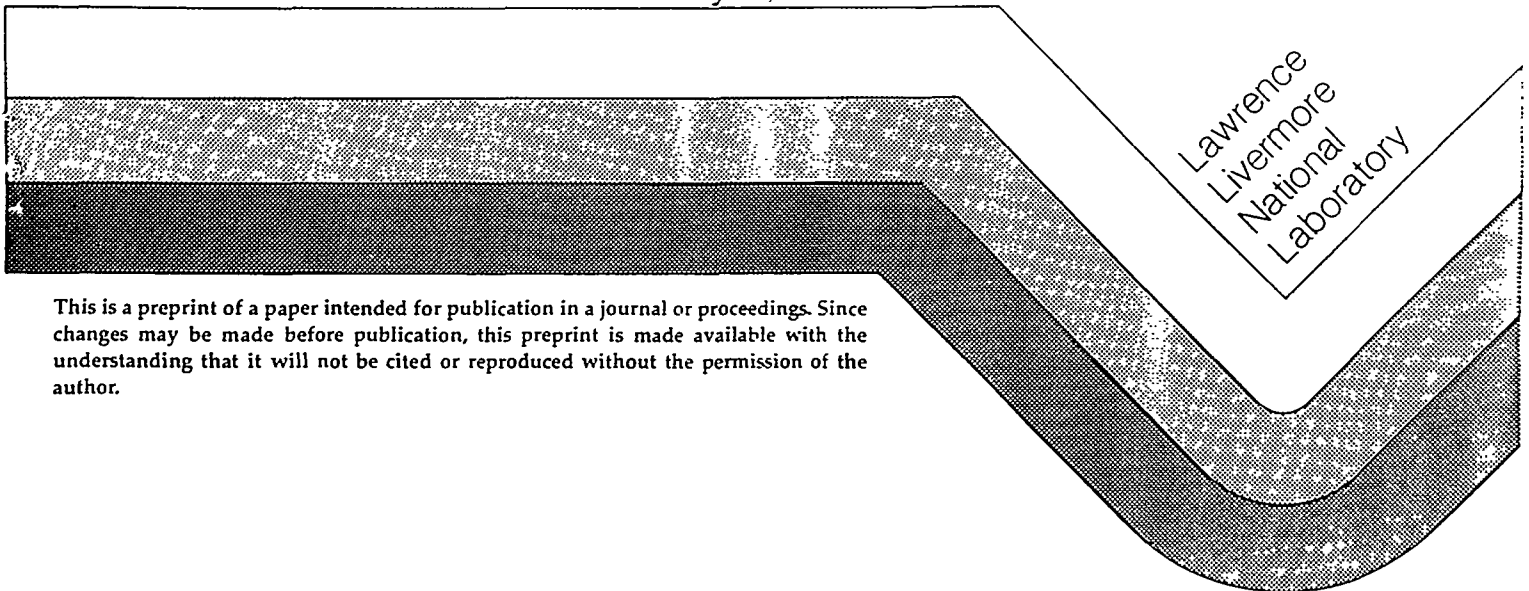

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

MASTER

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

Molten Salt Destruction as an Alternative to Open Burning of Energetic Material Wastes

Ravindra S. Upadhye, Bruce E. Watkins, César O. Pruneda, and William A. Brummond

Energetic Materials Center
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550, USA

Introduction

The Lawrence Livermore National Laboratory (LLNL) is developing methods for the safe and environmentally sound destruction of explosives and propellants as a part of its program on dismantlement and demilitarization of nuclear and conventional munitions. As a result of the end of the Cold War and the shift in emphasis to a smaller stockpile, many munitions, both conventional and nuclear, are scheduled for retirement and rapid dismantlement and demilitarization. Major components of these munitions are the explosives and propellants, or energetic materials. The Department of Energy has thousands of pounds of energetic materials which result from dismantlement operations at the Pantex Plant. The Department of Defense has many millions of pounds of energetic materials in its demilitarization inventory, with millions more added each year. In addition, there are vast surplus energetic material inventories world-wide, including those in the former Soviet Union and Eastern Bloc countries. Although recycling and reusing is the preferred method of dealing with these surplus materials, there will always be the necessity of destroying intractable or unusable energetic materials. Traditionally, open burn/open detonation (OB/OD) has been the method of choice for the destruction of energetic materials. Public concerns and increasingly stringent environmental regulations have made OB/OD of energetic materials increasingly costly and nearly unacceptable. Thus, the impetus to develop environmentally sound alternatives to dispose of energetic materials is great.

The destruction of energetic materials and wastes containing energetic materials using the Molten Salt Destruction (MSD) Process has been fully described in earlier publications (1,2). MSD converts the organic constituents of the waste into non-hazardous substances such as carbon dioxide, nitrogen and water. Any inorganic constituents of the waste, such as binders and metallic particles, are retained in the molten salt. The destruction of energetic material waste is accomplished by introducing it, together with oxidant gases, into a crucible containing a molten salt, such as sodium carbonate, or a suitable mixture of the carbonates, chlorides or sulfates of sodium, potassium, lithium and calcium (1,2). The temperature of the molten salt can be between 400° to 900° C. The organic components of the waste react with oxygen to produce carbon dioxide, nitrogen and steam. The inorganic components, in the form of "ash", are captured in the molten salt bed as a result of wetting and dissolution of the ash. Halogenated hydrocarbons in the waste (which may be present as a result of halogenated solvents in the waste, or as a result of halogenated polymeric binders for the explosive) generate acid gases such as hydrogen chloride during the pyrolysis and combustion processes occurring in the melt. These are scrubbed by the alkaline carbonates, producing steam and the corresponding salt, such as sodium chloride. The off-gases from the process are sent through standard off-gas clean-up processing (such as bag filters or HEPA filters) before being released to the atmosphere. At the end of the process runs, the salt is separated into carbonates, non-carbonate salts, and ash. The carbonates are recycled to the process, and the stable salts are disposed of appropriately.

LLNL has built a small-scale (about 1 kg/hr throughput) unit to test the destruction of energetic materials using the MSD process(2). We have modified the unit described in the earlier references to inject energetic waste material continuously into the unit. In addition to the HMX (octahydro- 1,3,5,7- tetranitro- 1,3,5,7-tetrazocine), other explosives we have destroyed include RDX (hexahydro- 1,3,5-trinitro- 1,3,5-triazine), PETN (2,2- bis[{nitroxy}methyl]- 1,3-propanediol dinitrate), ammonium picrate, TNT (trinitrotoluene), nitroguanidine, and TATB (2,4,6- trinitro- 1,3,5-benzenetriamine). We have also destroyed a liquid gun propellant comprising hydroxyl ammonium nitrate, triethanolammonium nitrate and water. In addition to these pure components, we have destroyed a number of commonly used formulations, such as LX-10 (HMX/Viton), LX-16 (PETN/FPC 461), LX-17 (TATB/Kel F), and PBX-9404 (HMX /CEF /Nitro cellulose). Our experiments have demonstrated that energetic materials can be safely and effectively treated by MSD. We have also investigated the issue of steam explosions in molten salt units, both experimentally and theoretically, and concluded that steam explosions can be avoided under proper design and operating conditions. We are currently building a larger unit (nominal capacity 5 kg/hr, Figures 1 and 2) to investigate the relationship between residence time, temperature, feed concentration and throughputs, avoidance of back-burn, and determination of the products of combustion under different operating conditions.

Explosion Safety

Safety is a major consideration in any process where high explosives (HE) or wastes containing HE are destroyed. We have successfully and safely destroyed slurries (or solution, in case of the liquid gun propellant) of 35 weight percent energetic material (HE and HE formulations) in water. The liquid, in addition to keeping the HE concentration to a safe dilution level, provides a vehicle for handling the HE. The specially designed nozzle, described in earlier publications (1,2) keeps the HE well below its decomposition temperature. Further, the nozzle is designed to create froth comprising water, HE and air before introducing it into the molten salt to minimize the possibility of a burn back. Finally, the entire experiment is conducted remotely.

Other explosion scenarios, not related to high explosives, are possible in the MSD process:

- If the outlet from the MSD reactor gets plugged or restricted, and if the liquid feed to the molten salt bath continues, the resultant pressure increase in the vessel may lead to its explosive rupture.
- The rapid heat transfer from the hot liquid to the cold liquid may give rise, temporarily, to a region of superheated liquid, which may spontaneously nucleate, resulting in an explosion(3).

The first scenario can be avoided by installing pressure sensors in the reactor, the lines and the auxiliary equipment, and carefully monitoring the pressure rise continuously. Interlocks on the feed delivery system can be designed so that any excursion of pressure beyond the design limits stop the feed. Relief valves and rupture disks may also be used for additional safety. The new unit under construction is wider at the top so as to slow down the product gases, and thereby minimize salt carryover leading to the plugging up of the exhaust line.

The second scenario can be dealt with by choosing proper equipment (reactor, feed system, controls, etc.) design and operating conditions. The nozzle has been designed to disperse the feed into a stream of rapidly moving gas, thereby eliminating or reducing the probability of large slugs of cold water contacting the hot molten salt. Second, the contents of the reactor are constantly agitated by the driver gas and the air needed for oxidation. This ensures that quiescent layers of hot and cold liquids do not form in the reactor. Our analyses show that this eliminates the possibility of steam explosion in the molten salt system. We have demonstrated the safety of our specific experimental set-up by repeated injection of pure water under the molten salt bed for prolonged duration without any adverse consequences.

Results from the Experimental Program

The details of the experimental apparatus, the feed nozzle and the operating procedures have been described in detail elsewhere (1,2). In addition, another paper discussing the details of the experiments, along with the results of the off-gas analyses, is being presented at this conference (4).

Gas samples were taken during the experiments, and analyzed using a gas chromatograph and mass spectrometer (GC/MS). Typical gas analyses for a number of pure explosives and formulations indicate that(4):

1. No HCN was found in the exhaust gas. Since HE decomposition and oxidation may be accompanied by evolution of some HCN, we may infer that the HCN, being an acid gas, was neutralized by the alkaline carbonate, producing NaCN.
2. The amount of NO_x and CO was relatively small. This indicates that the major combustion products are N₂, CO₂ and H₂O.

Analyses of the salt samples after the experiments indicate that, within the detection limit of 5 ppm, no HE or propellant is detected in the salt (1,2). This is consistent with our expectations, given the ease of decomposition of the energetic materials at these temperatures.


Conclusions and Future Work

We have demonstrated that HEs and liquid propellants can be safely and fully destroyed using the molten salt destruction process. We are currently working on a number of improvements to the process:

- We are building a larger unit (Figures 1 and 2) to investigate the effect of temperature, throughput and scale on the destruction efficiency of a number of explosives and explosive formulations on a larger scale.
- We are implementing an advanced feeder system for injection of larger particles.
- We are defining operating envelopes for a number of high explosives and formulations.
- We are developing models to study the temperature profile of a top-feed nozzle for feeding larger particles into the unit.

References

1. Upadhye, R.S., et. al., "Destruction of Energetic Materials using the Molten Salt Destruction Process", presented at the I&EC Special Symposium, American Chemical Society, Atlanta, Georgia, September 28, 1993.
2. Upadhye, R.S., et. al., "Destruction of High Explosives and Wastes Containing High Explosives using the Molten Salt Destruction Process", presented at the I&EC Special Symposium, American Chemical Society, Atlanta, Georgia, September 21-23, 1992.
3. Henry, R.E., et. al., "Large Scale Vapor Explosions", Proceedings of the Fast Reactor Safety Meeting, April 2-4, 1974, Beverly Hills, CA (NTIS Ref. No. CONF-740401-P2).
4. Watkins, B.E., et.al., "Emissions from Energetic Material Waste during the Molten Salt Destruction Process", presented at the I&EC Special Symposium, American Chemical Society, Atlanta, Georgia, September 19-21, 1994.

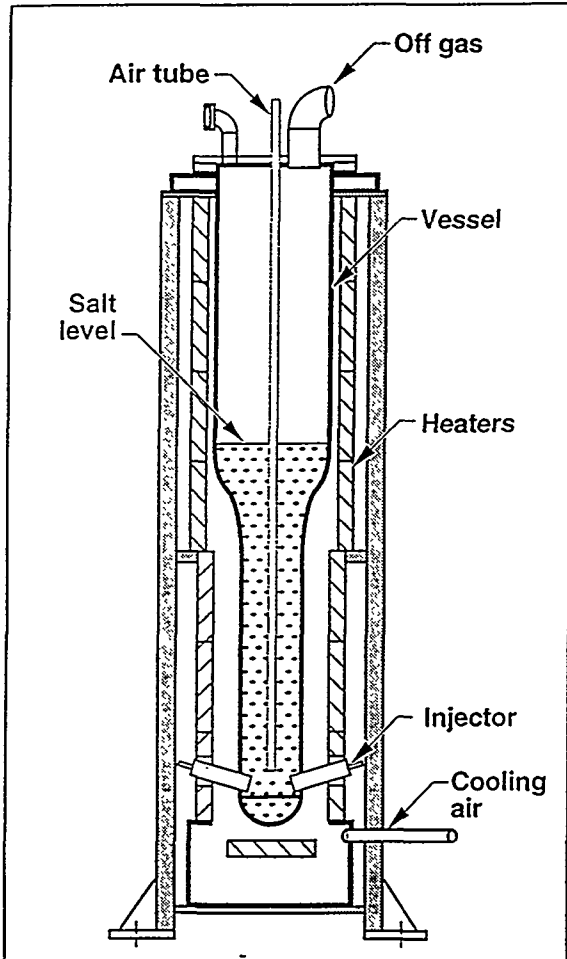

5.0 0694.2739cb01

Figure 1. Schematic of the Advanced Unit.

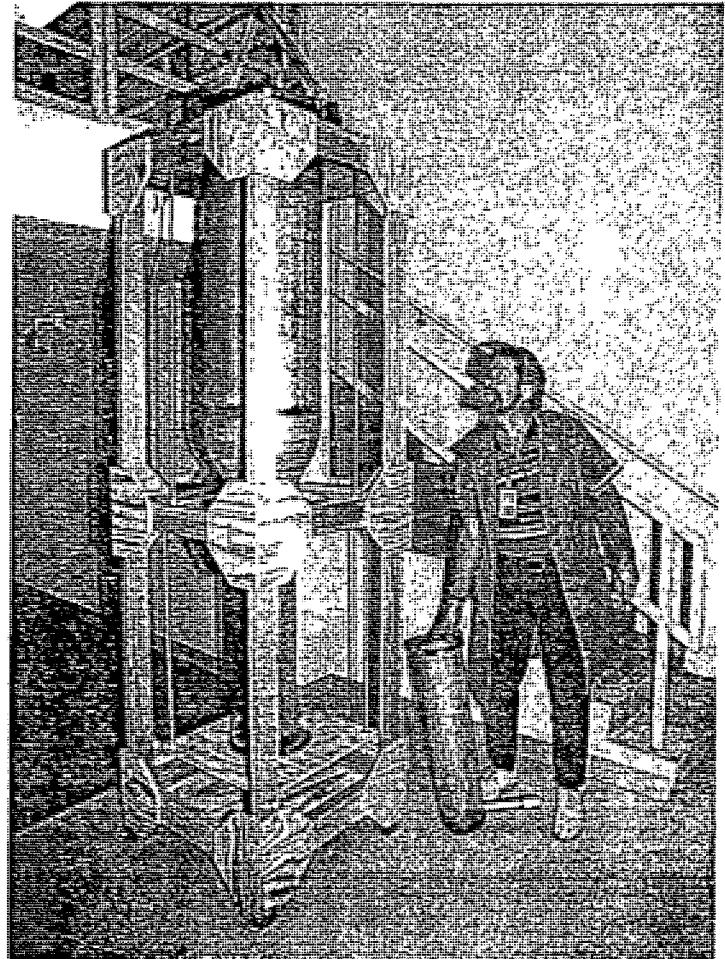


Figure 2. Advanced Unit vessel.

*This work was performed under the auspices of the U.S. Department of Energy by the Lawrence Livermore National Laboratory under contract number W-7405-ENG-48.