



Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

Accelerator & Fusion Research Division

Presented at the Particle Accelerator Conference, Dallas, TX,
May 1-5, 1995, and to be published in the Proceedings

Experimental Investigations of Plasma Lens Focusing and Plasma Channel Transport of Heavy Ion Beams


T. Tauschwitz, S.S. Yu, S. Eylon, L. Reginato,
W. Leemans, J.O. Rasmussen, and R.O. Bangerter

April 1995

RECEIVED

JUL 13 1995

OSTI

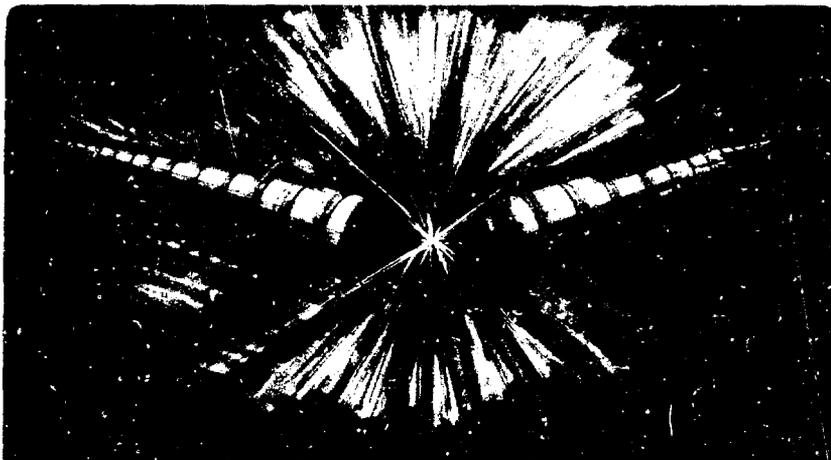

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Lawrence Berkeley Laboratory is an equal opportunity employer.

Experimental Investigations of Plasma Lens Focusing and Plasma Channel Transport of Heavy Ion Beams

T. Tauschwitz, S.S. Yu, S. Eylon, L. Reginato, W. Leemans,
J.O. Rasmussen, and R.O. Bangerter

Accelerator and Fusion Research Division
Lawrence Berkeley Laboratory
University of California
Berkeley, California 94720

April 1995

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This work was supported by the Director, Office of Energy Research, Office of High Energy Physics, of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

MASTER

EXPERIMENTAL INVESTIGATIONS OF PLASMA LENS FOCUSING AND PLASMA CHANNEL TRANSPORT OF HEAVY ION BEAMS

A. Tauschwitz, S.S. Yu, S. Eylon, L. Reginato, W. Leemans, J.O. Rasmussen, R.O. Bangerter, Lawrence Berkeley Laboratory, Berkeley, CA 94720.

Final focusing of ion beams and propagation in a reactor chamber are crucial questions for heavy ion beam driven Fusion. An alternative solution to ballistic quadrupole focusing, as it is proposed in most reactor studies today, is the utilization of the magnetic field produced by a high current plasma discharge. This plasma lens focusing concept relaxes the requirements for low emittance and energy spread of the driver beam significantly and allows to separate the issues of focusing, which can be accomplished outside the reactor chamber, and of beam transport inside the reactor. For focusing a tapered wall-stabilized discharge is proposed, a concept successfully demonstrated at GSI, Germany. For beam transport a laser pre-ionized channel can be used.

I. INTRODUCTION

Final focusing of ion beams and their propagation in a reactor chamber are crucial for heavy ion beam driven fusion power production. The concept and technical realization of these operations have strong impacts both on the design of the accelerator and the layout of the reactor chamber. Most studies today are based on 'ballistic' focusing by magnetic quadrupole lenses. This concept suffers from the sensitivity of the final focus to the current and shape of the beam pulses that are delivered by the driving accelerator. To reduce space charge blow-up of the driver beam in the final focus region the total beam current has to be divided into several beams, each with an individual final focusing system and a separate beam port in the reactor chamber.

An alternative solution is to space charge and current neutralize the beam completely and to strip the ions to a high charge state. An external focusing force is then applied to the beam to focus and transport it to the target. The advantage of this scheme is its physical simplicity because collective beam effects don't have to be considered and the beam can be treated as an ensemble of independent particles in the external focusing field. To create the focusing force the magnetic field of a high current plasma discharge can be used. This plasma lens focusing concept significantly relaxes the requirements on emittance and energy spread of the driver beam. A further advantage of this concept is the high insensitivity to the driver beam current and pulse shape.

The problems of focusing and of transport to the target are to a great extent independent of each other. For an experimental approach to evaluate the feasibility of the plasma lens concept these issues can be separated. Focusing of the ion beam can be accomplished using a wall-stabilized discharge. For the final transport through the 2-3 meter radius of the reactor chamber the focused beam can be confined in a discharge channel. Since the beam is expected to be

completely space charge and current neutralized in the discharge channel the whole beam intensity required to ignite a target can be transported in one channel or, if higher symmetry of the target illumination is necessary, in two channels. For a Bi ion beam of 10 GeV a plasma current of approximately 100 kA is sufficient to focus and transport the beam to the target. Several schemes are possible to form the discharge channel inside the reactor chamber. All of them include a laser to pre-form a path for the discharge channel.

A schematic layout of a reactor chamber using the proposed plasma lens final focusing is sketched in Figure 1. A single laser can be used to provide four channels from the reactor wall to the fusion pellet. Two of these channels are used to transport the driver beam and to illuminate the target from two sides. The remaining two channels are necessary to provide a return path for the discharge current. The discharge can be driven by one or several capacitor banks close to the reactor wall. To focus the driver beams down to the size of the discharge channel two wall-stabilized, tapered discharges are used. The angular acceptance of these lenses is big enough to combine several driver beams in each discharge and to keep a free optical path for the laser.

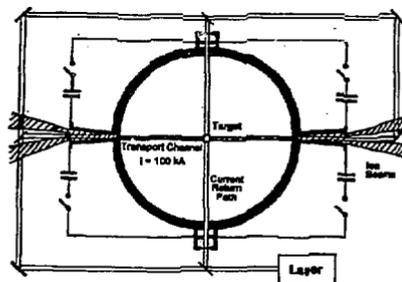


Figure 1. Schematic layout of a reactor chamber.

II FOCUSING WITH AN ADIABATIC PLASMA LENS

In a plasma lens the purely azimuthal magnetic field of a gas discharge is used to focus an ion beam moving along the axis of the discharge. Since a strong, first order focusing force is applied to the beam in both transversal planes perpendicular to the beam direction this kind of focusing is much stronger than quadrupole focusing, which is, applied to both directions, an effect of only second order [1].

The beam is expected to be in an average charge state between 2 and 3 [5]. With a discharge length of 30 cm and a discharge current of 20 kA the particles perform one and a half betatron oscillations in the lens so that an initially parallel beam of low emittance forms one focal spot inside the lens and another one at the end of the lens. The calculated emittance that this lens can handle without losing particles is 225 mm-mrad. This number is consistent with Monte-Carlo simulations of the focusing. These calculations include charge transfer processes instead of simply using an averaged charge state but do not include scattering of the ions in the discharge plasma. For the above mentioned case these calculations yield a negligible amount of particle losses below an emittance of 225 mm mrad and an almost linear increase of particle losses to about 35% for an emittance of 500 mm mrad.

At the low energy of 2 MeV scattering in the discharge plasma is an important factor. To determine the emittance increase by scattering the scattering in a 2 cm gas stripper cell has been measured for helium, nitrogen, and argon gas of up to 1 Torr pressure. From these measurements scattering angles up to 100 mrad can be expected for 0.9 MeV beam energy at the end of a 30 cm long tube with 1 Torr helium. This amounts to approximately 250 mm mrad emittance of the beam at the end of the focusing discharge, which is only slightly above the tolerable emittance. For higher beam energies or lower gas pressures no beam losses due to scattering are expected.

III. BEAM TRANSPORT IN A DISCHARGE CHANNEL

The driver beams can be combined and focused to a diameter of 10 mm outside the reactor. To keep the beam at this size during the 2 or 3 m radius of the reactor chamber the same magnetic field is required as at the end of the focusing section. This can be produced by a discharge channel of 10 mm diameter with 100 kA current. To guide such a channel from the beam port in the reactor wall to the target a laser can be used to pre-ionize the background gas in the reactor chamber.

Several coupling mechanisms of the laser energy to the gas have been studied experimentally. One of the most efficient ways is to add a small percentage of an organic molecule with a high photo ionization crosssection to the gas and to photo-ionize these organic molecules in a two photon process with an excimer laser. Breakdown of a high current discharge over up to 1.2 m along a laser path has been reported at 30% of the self breakdown voltage of the system [6]. For a reactor chamber a sufficient pre ionization can be achieved with an excimer laser of 1 to 10 J pulse energy.

A crucial point in this transport scheme is the stability of the discharge channel. Unless very high voltages are used to create the channel the high inductance of the long current path through the reactor chamber will limit the current rise time to several microseconds. The highest hydrodynamic stability of the plasma channel is expected for a discharge in a heavy gas as argon at a pressure of 10 Torr or more. An

experiment is set up to address the problems of dynamics and stability for a discharge channel of up to 90 cm length with a discharge current in the range of 50 to 100 kA and a current rise time of four microseconds. Further objectives of the experiment are the interaction of the plasma channel with a target and possible interactions between the channel and its return current path.

VI. CONCLUSION

Final focusing based on plasma lens focusing and discharge channel transport seems feasible if the stability of the channel is sufficient and if the problem of channel target interaction can be solved. The advantages of this focusing scheme for the driving accelerator are relaxed requirements for emittance and momentum spread. The advantage for the reactor layout is the much smaller area of beam ports in the reactor wall, which makes the problem of explosion debris flying up the beam lines much easier to solve.

VII. ACKNOWLEDGMENTS

One of the authors (A.T.) wishes to thank the German Humboldt foundation for granting a Feodor-Lynen fellowship to support his visit at the Lawrence Berkeley Laboratory.

VIII. REFERENCES

- [1] E. Boggasch, B. Heimrich, D.H.H. Hoffmann, "Focusing behaviour of plasma lenses compared to conventional quadrupole systems", Nucl. Instr. Meth. A 336 (1993) 438-441.
- [2] E. Boggasch, A. Tauschwitz, H. Wahl, K.-G. Dietrich, D.H.H. Hoffmann, W. Laux, M. Stetter, R. Tkotz, "Plasma lens fine focusing of heavy-ion beams", Appl. Phys. Lett. 60 (1992) 2475-2477.
- [3] A. Tauschwitz, M. de Magistris, E. Boggasch, M. Dornik, D.H.H. Hoffmann, J. Jacoby, W. Seelig, P. Spiller, H. Wetzler, "Performance of a Shape Optimized Conical Plasma Lens", GSI Report 94-10 (1994) 10
- [4] P. Chen, K. Oide, A.M. Sessler, S.S. Yu, "Plasma-Based Adiabatic Focuser", Phys. Rev. Lett. 64 (1990) 1231-1234
- [5] H.D. Betz, "Heavy Ion Charge States", in Applied Atomic Collision Physics, Pure and Applied Physics, 43-4 (1983) 1-42
- [6] C.A. Frost, J.R. Woodworth, J.N. Olsen, T.A. Green, "Plasma channel formation with ultraviolet lasers", Appl. Phys. Lett. 41 (1982) 813-815