

RMIS View/Print Document Cover Sheet

This document was retrieved from the Documentation and Records Management (DRM) ISEARCH System. It is intended for Information only and may not be the most recent or updated version. Contact a Document Service Center (see Hanford Info for locations) if you need additional retrieval information.

Accession #: D196078032

Document #: WHC-SA-3086-FP

Title/Desc:

USE OF THE WIMS-E LATTICE CODE FOR PREDICTION OF
THE TRANSURANIC SOURCE TERM FOR SPENT FUEL DOSE
ESTIMATION

Pages: 10

Use of the WIMS-E Lattice Code for Prediction of the Transuranic Source Term for Spent Fuel Dose Estimation

K. N. Schwinkendorf
S. P. Roblyer
S. A. Parra

Date Published
April 1996

To Be Presented at
Spectrum '96
ANS Nuclear and Hazardous Waste Management
International Topical Meeting
Seattle, Washington
August 18-23, 1996

Prepared for the U.S. Department of Energy
Assistant Secretary for Environmental Management



Westinghouse
Hanford Company

P.O. Box 1970
Richland, Washington

Management and Operations Contractor for the
U.S. Department of Energy under Contract DE-AC06-87RL10930

Copyright License By acceptance of this article, the publisher and/or recipient acknowledges the
U.S. Government's right to retain a nonexclusive, royalty-free license in and to any copyright covering this paper.

Approved for public release

LEGAL DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This report has been reproduced from the best available copy.

Printed in the United States of America

DISCLM-2.CHP (1-91)

INFORMATION RELEASE REQUEST - (Long Form)

(GRAY SHADED AREAS NOT TO BE FILLED IN BY INITIATOR)

1. COMPLETE THIS SECTION FOR ALL DOCUMENTS

A. Information Category		B. Document ID Number (include rev., vol., etc.)
Speech or Presentation <input checked="" type="checkbox"/> Full Paper <input type="checkbox"/> Journal Article <input type="checkbox"/> Summary <input type="checkbox"/> Multimedia Presentation <input type="checkbox"/> Abstract <input type="checkbox"/> Software <input type="checkbox"/> Visual Aid <input type="checkbox"/> Other _____		WHC-SA-3086-FP
		C. List attachments (i.e., copyright permission, copyright transfer)

D. Document Title	E. WHC Project or Program
Use of the WIMS-E Lattice Code for Prediction of the Transuranic Source Term for Spent Fuel Dose Estimation.	SNFP

F. New or novel (patentable) subject matter? If "Yes", has disclosure been submitted by WHC? <input type="checkbox"/> No or Yes If "Yes", Disclosure No(s): _____	<input checked="" type="checkbox"/> No or Yes	G. Information received from others in confidence, such as proprietary data, and/or inventions? <input type="checkbox"/> No or Yes If "Yes", contact WHC General Counsel.
H. Copyrights?	<input checked="" type="checkbox"/> No or Yes If "Yes", attach permission.	I. Trademarks? <input checked="" type="checkbox"/> No or Yes If "Yes", identify in document.

2. COMPLETE THIS SECTION FOR ALL DOCUMENTS REQUIRING SUBMISSION TO OSTI

A. Unclassified Category	UC -	B. Budget & Reporting Code	B&R -
--------------------------	------	----------------------------	-------

3. COMPLETE THIS SECTION ONLY FOR A JOURNAL SUBMISSION


A. Title of Journal

4. COMPLETE THIS SECTION ONLY FOR A SPEECH OR PRESENTATION

A. Title for Conference or Meeting	B. Group or Society Sponsoring	
Spectrum '96	American Nuclear Society	
C. Date(s) of Conference or Meeting	D. City/State	E. Will material be published in proceedings? <input checked="" type="checkbox"/> No or Yes Will material be handed out? <input checked="" type="checkbox"/> No or Yes
Aug 18-23 1996	Seattle, Washington	

5. REVIEWS

Reviewers	Yes	Signature indicates Approval as Requested unless otherwise indicated Name (prints)	Signature/Date	Limited-Use Info.
General Counsel	<input type="checkbox"/>			<input type="checkbox"/>
DOE-RL	<input checked="" type="checkbox"/>	<i>E. D. Sellers approved per telecon 1.8.96</i>		<input type="checkbox"/>
Communications	<input type="checkbox"/>			<input type="checkbox"/>
Applied Technology-Export Controlled Information or International Program	<input type="checkbox"/>			<input type="checkbox"/>
Other	<input type="checkbox"/>			<input type="checkbox"/>
Other	<input type="checkbox"/>			<input type="checkbox"/>

6. Applied Technology Material Referenced <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes	INFORMATION RELEASE ADMINISTRATION APPROVAL IRA Approval is required before release. Release is contingent upon resolution of mandatory comments. NOTE: This block for IRA use only.	
7. Release Level <input checked="" type="checkbox"/> Public <input type="checkbox"/> Limited Distribution		
8. Author/Requestor K. N. Schwinkendorf <i>K.N. Schwinkendorf</i> 4/11/96 (Print and Sign) Date		
9. Responsible Manager <i>[Signature]</i> 4/11/96 A. E. Walter (Print and Sign) Date		
	Date Cancelled	Date Disapproved

USE OF THE WIMS-E LATTICE CODE FOR PREDICTION OF THE TRANSURANIC SOURCE TERM FOR SPENT FUEL DOSE ESTIMATION

Kevin N. Schwinkendorf
Westinghouse Hanford Company
P.O. Box 1970 HO-32
Richland, Washington 99352
(509) 376-0960

Steven P. Roblyer
Westinghouse Hanford Company
P.O. Box 1970 HO-32
Richland, Washington 99352
(509) 376-0436

Santiago A. Parra
Westinghouse Hanford Company
P.O. Box 1970 HO-32
Richland, Washington 99352
(509) 373-3379

ABSTRACT

A recent source term analysis has shown a discrepancy between ORIGEN2 transuranic isotopic production estimates and those produced with the WIMS-E lattice physics code. Excellent agreement between relevant experimental measurements and WIMS-E was shown, thus exposing an error in the cross section library used by ORIGEN2.

I. INTRODUCTION

The planned re-racking of N Reactor fuel assemblies and packing of scrap into multiple canister overpack (MCO) containers has generated some concern as to the size of the spontaneous neutron source term, important in characterizing the estimated dose. Previous calculations using the RADNUC code (an automated interpolator code using ORIGEN2 production tables) has possibly over-estimated the size of the ^{244}Cm contribution by over an order of magnitude. The overall over-estimation of the source term may be at least a factor of five; this will result in greater (and unnecessary) expense in shielding requirements.

The ORIGEN2 computer code uses effective one-group cross sections in its burnup equations. These cross sections must come from somewhere, and various libraries exist for different applications. At least one existing ORIGEN2 library uses cross sections extracted out of older WIMS-D calculations; another library (for ORIGEN-S) was created specifically for N Reactor MKIV and MKIA inners and outers, using the Oak Ridge SCALE system.

The latest version of WIMS-E, version 6a, has recently been obtained from the British AEA Technology. This latest version of the code comes with the latest cross section library (1994) and comes in both 69 and 172 energy groups. This cross section

library was created from the latest cross section evaluations from the Joint European File (JEF2.2), from ENDF-B/VI, and for the first time, includes extension of the transuranic burnup equations into the curium chains.

Preliminary results from WIMS-E 6a show a much smaller quantity of ^{244}Cm produced than the earlier ORIGEN calculations. In addition, WIMS-E 6a isotopic predictions for irradiated MKIV fuel (both inner and outer) are in excellent agreement with measured isotopic production data.¹

In an attempt to upgrade ORIGEN2 capabilities for burnup analysis of N Reactor fuel types, new effective one-group microscopic cross sections have been extracted out of WIMS-E output for both MKIV and MKIA inners and outers as a function of burnup.

It is believed that the discrepancy in the ^{244}Cm production is due to an error in the extraction of the one-group cross sections out of the earlier WIMS-D results.

II. ISOTOPIC PRODUCTION CALCULATIONS

The WIMS-E 6a computer code² was used in a burnup mode for both MKIV and MKIA N Reactor fuel types. Hot operating conditions (temperatures, thermally expanded dimensions and reduced densities) were taken from the DCODE fuels performance code, used extensively in the past in support of fuel design and operation of the N Reactor. To estimate the transuranic isotopic distribution of the spent fuel inventory, a database is required that contains information on the quantity of initial uranium metal and the total exposure present in each of the groups of spent fuel. A small FORTRAN post-processor program was written to extract the isotopic data out of the WIMS-E output files, and combine this data with the exposure

database. For every exposure group, the database contains the quantity of uranium metal and the exposure it has acquired. The WIMS-E production tables give the isotopic quantities (e.g., gram per metric ton of initial uranium) as a function of exposure. The post-processor takes an exposure group and uses a three-point interpolation to calculate the grams per metric ton of each isotope at that exposure, and multiplies this by the initial uranium in the group; the result is the total quantity of each isotope, for each group of spent fuel.

As a conservative estimate for the source term prediction, the highest-exposure 270 MKIV fuel assemblies (five tiers of 54 assemblies each) were assumed to be loaded into a single MCO. To treat non-linearities of isotopic quantities with burnup, it was decided to approximate these 270 fuel assemblies by equal mass quantities of MKIV fuel, each at five different exposures. The MKIA basis was 288 fuel assemblies (six tiers of 48 assemblies each). A FORTRAN program was used to interpolate the transuranic isotopics for each of the exposure bins, and sum over the five (or six) bins to find the total.

III. CALCULATION VALIDATION

Transuranic isotope quantities have been measured and documented for known burnups.¹ WIMS-E isotopic predictions agree very well for all of the isotopes that were compared. WIMS-E performs a cylindrical integral transport calculation in 69 neutron energy groups and then uses the transport solution to provide fluxes that drive the burnup equations in each burnable material. This is repeated for each burnup steps. WIMS-E therefore predicts the fraction of power (and exposure) produced in the inner and outer elements of the tube-in-tube geometry of N Reactor fuel. Power sharing ratios represent the ratio of either inner or outer element specific power (power per unit mass) to the assembly average specific power. These ratios are burnup dependent. Figure 1 shows how these ratios change with burnup; these values are consistent with the power sharing ratio assumed in the older ORIGEN model. Figures 2 and 3 illustrate the ²³⁵U depletion in MKIV inner and outer elements, as predicted by WIMS-E and as measured. Figures 4 and 5 show the same comparison for ²³⁶U buildup; the WIMS-E calculation assumed an initial ²³⁶U content of 400 ppm. The plutonium isotope comparisons are shown in Figures 6 through 15.

Further along the burnup chain are the curium isotopes. Figures 16 and 17 show predicted ²⁴⁴Cm contents for both inner and outer elements. The agreement is very good.

Figure 1. Power Ratio vs Exposure. MKIV assemblies.

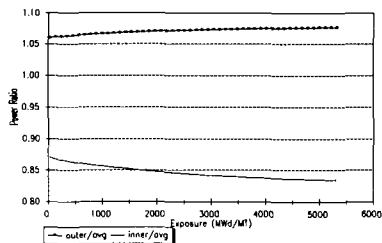


Figure 2. U-235 vs Exposure. N Reactor MKIV Inner.

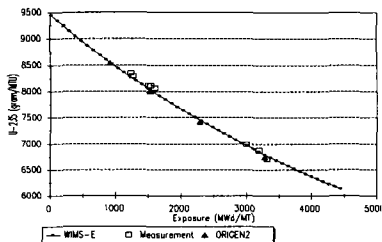


Figure 3. U-235 vs Exposure. N Reactor MKIV Outer.

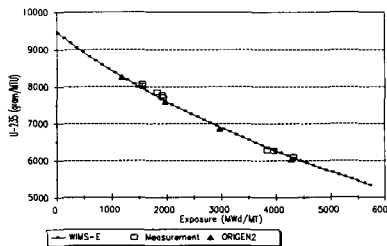


Figure 4. U-236 vs Exposure.
N Reactor MKIV Inner.

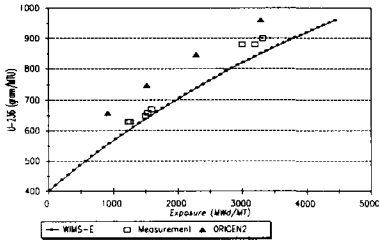


Figure 5. U-236 vs Exposure.
N Reactor MKIV Outer.

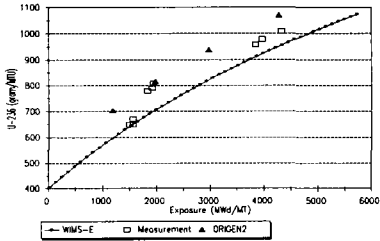


Figure 6. Pu-238 vs Exposure.
N Reactor MKIV Inner.

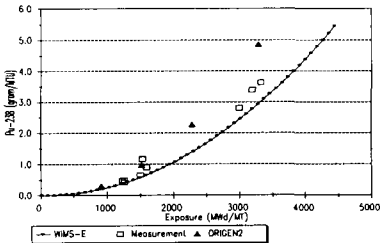


Figure 7. Pu-239 vs Exposure.
N Reactor MKIV Outer.

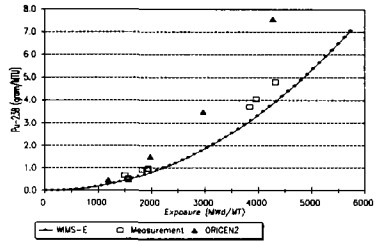


Figure 8. Pu-239 vs Exposure.
N Reactor MKIV Inner.

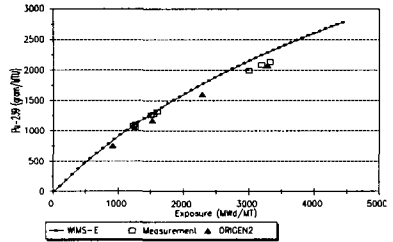


Figure 9. Pu-239 vs Exposure.
N Reactor MKIV Outer.

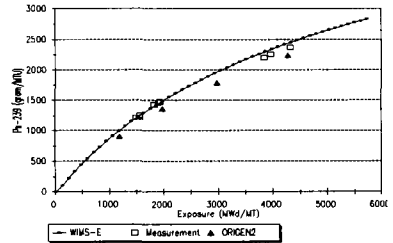


Figure 10. Pu-240 vs Exposure.
N Reactor MKIV Inner.

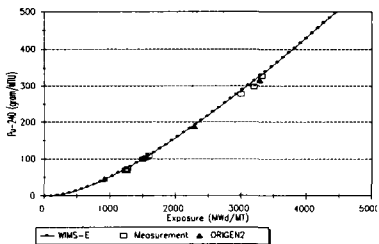


Figure 11. Pu-240 vs Exposure.
N Reactor MKIV Outer.

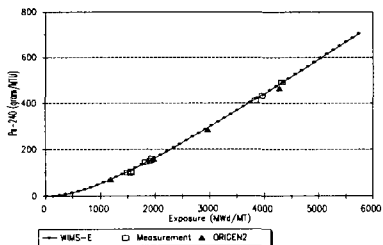


Figure 12. Pu-241 vs Exposure.
N Reactor MKIV Inner.

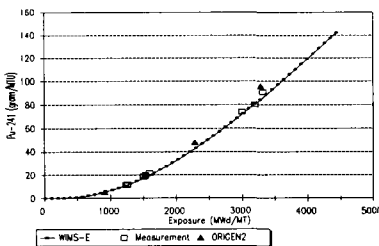


Figure 13. Pu-241 vs Exposure.
N Reactor MKIV Outer.

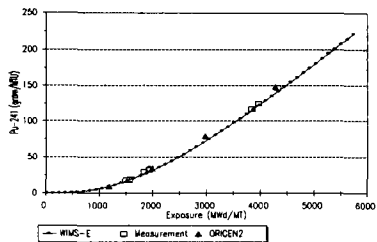


Figure 14. Pu-242 vs Exposure.
N Reactor MKIV Inner.

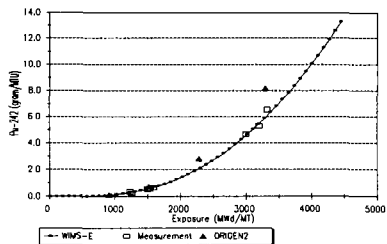


Figure 15. Pu-242 vs Exposure.
N Reactor MKIV Outer.

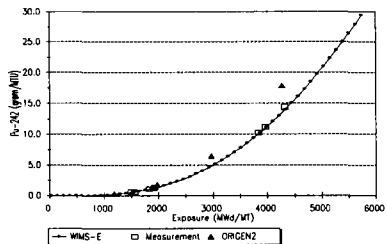


Figure 16. Cm-244 vs Exposure.
N Reactor MKIV Inner.


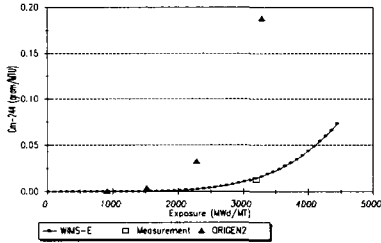


Figure 17. Cm-244 vs Exposure.
N Reactor MKIV Outer.

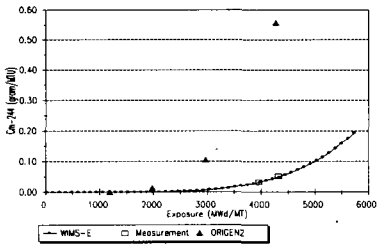

IV. EFFECTIVE ONE-GROUP CROSS SECTIONS

The effective self-shielded one-group microscopic cross section is defined by the equation:

$$\bar{\sigma}_x = \frac{\sum_{g=1}^G \sigma_{x,g} \phi_g}{\sum_{g=1}^G \phi_g} \quad (1)$$

In Equation, $\bar{\sigma}_x$ is the effective one-group microscopic cross section of reaction type x . The 69-group neutron flux spectrum, ϕ_g , is used as the weighting function to average the microscopic group-dependent cross section, $\sigma_{x,g}$. The summation in the numerator is performed automatically by using the reaction rate output edit module W-WIRE, contained within the WIMS-E code. The summation in the

denominator is simply the one-group neutron flux, and is output by using the W-WED module. A small FORTRAN program was written to read the ASCII text file produced by WIMS-E, and collect the data required to evaluate $\bar{\sigma}_x$. This post-processing was performed for both inner and outer elements, and for both MKIV and MKIA fuel types, as a function of burnup; 50 burnup steps were performed. Effective one-group cross sections were calculated for several uranium and transuranium isotopes, listed in the table below:

Nuclide Evaluated	WTMS-E ID code
²³⁵ U	2235
²³⁶ U	2236
²³⁸ U	2238
²³⁷ U	2237
²³⁷ Np	3237
²³⁹ Np	3239
²³⁹ Pu	4238
²³⁹ Pu	4239
²⁴⁰ Pu	4240
²⁴¹ Pu	4241
²⁴² Pu	4242
²⁴¹ Am	5241
^{242m} Am	5242
²⁴³ Am	5243
²⁴³ Cm	6243
²⁴⁴ Cm	6244

The final set of effective one-group microscopic cross sections was delivered for modification of the ORIGEN2 cross section library.

REFERENCES

1. Wittekind, W. D., *Fuel Segregation Detector Calibration and DCODE Computer Modeling*, UNI-2384, UNC Nuclear Industries, Inc., Richland, Washington (1984).
2. Gubbins, M. E., M. J. Roth, and C. J. Taubman, *A General Introduction to the Use of the WIMS-E Modular Program*, AEEW-R 1329, Reactor Physics Division, AEE Winfrith, England (1982)