

An Automated, Image Processing System

For Concrete Evaluation

Federal Manufacturing & Technologies

C. W. Baumgart,

K. D. Linder, and

S. P. Cave

KCP-613-6111

Published November 1998

Approved for public release; distribution is unlimited.



Prepared Under Contract Number DE-ACO4-76-DP00613 for the
United States Department of Energy

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade names, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Printed in the United States of America.

This report has been reproduced from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P. O. Box 62, Oak Ridge, Tennessee 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U. S. Department of Commerce, 5285 Port Royal Rd., Springfield, Virginia 22161.

Copyright © 1998 by AlliedSignal Inc. The Government is granted for itself and others acting on its behalf a paid-up, nonexclusive, irrevocable worldwide license in this data to reproduce, prepare derivative works, and perform publicly and display publicly.

A	
prime contractor with the United States	Allied Signal Inc.
Department of Energy under Contract Number DE-ACO 4-76-DPO 0613.	Federal Manufacturing & Technologies P. O. Box 4191 59 Kansas City, Missouri 64141-6159

KCP-613-6111

Distribution Category UC-706

Approved for public release; distribution is unlimited.

AN AUTOMATED, IMAGE PROCESSING SYSTEM

FOR CONCRETE EVALUATION

C. W. Baumgart,

K. D. Linder, and

S. P. Cave

Published November 1998

Paper submitted to ANNIE '98 (Artificial Neural Networks in Engineering)

November 1, 1998

St. Louis, MO



An Automated, Image Processing System
for Concrete Evaluation

Dr. Chris W. Baumgart

Technical Project Specialist

AlliedSignal Federal Manufacturing & Technologies*

PO Box 4339, Albuquerque, NM 87196

505-844-2585 (voice) 505-844-3751 (fax)

cbaumgart@kcp.com (e-mail)

Dr. Kim Dalton Linder

Senior Engineer

AlliedSignal Federal Manufacturing & Technologies

PO Box 4339, Albuquerque, NM 87196

505-844-9927 (voice) 505-844-3751 (fax)

klinder@kcp.com (e-mail)

Mr. Steven P. Cave

Technical Project Specialist

AlliedSignal Federal Manufacturing & Technologies

PO Box 4339, Albuquerque, NM 87196

505-844-5604 (voice) 505-844-3751 (fax)

scave@kcp.com (e-mail)

ABSTRACT:

AlliedSignal Federal Manufacturing & Technologies (FM&T) was asked to perform a proof-of-concept study for the Missouri Highway and Transportation Department (MHTD), Research Division, in June 1997. The goal of this proof-of-concept study was to ascertain if automated scanning and imaging techniques might be applied effectively to the problem of concrete evaluation. In the current evaluation process, a concrete sample core is manually scanned under a microscope. Voids (or air spaces) within the concrete are then detected visually by a human operator by incrementing the sample under the crosshairs of a microscope and by counting the number of "pixels" which fall within a void. Automation of the scanning and image analysis processes is desired to improve the speed of the scanning process, to improve evaluation consistency, and to reduce operator fatigue. An initial, proof-of-concept image analysis approach was successfully developed and demonstrated using acquired black and white imagery of concrete samples. In this paper, the automated scanning and image capture system currently under development will be described and the image processing approach developed for the proof-of-concept study will be demonstrated. A development update and plans for future enhancements are also presented.

*Operated for the United States Department of Energy under Contract No. DE-ACO4-76-DP00613.

© Copyright AlliedSignal Inc., 1998.

Keyword I: Machine Vision and Image Processing

Keywords II: Classification-Fusion, Computer Vision, Data-Analysis, Data-Fusion, Data-Visualization, Design-Automation, Feature-Extraction, Feature-Identification and Classification, Image-Data Acquisition, Image- Interpretation, Image-Processing, Machine-Vision, Machine-Vision and Image Processing, Matching-Fuzzy, Texture Classification

Introduction

Automated machine vision techniques are being used with increasing frequency to improve the efficiency, throughput, and accuracy of manual inspection and evaluation processes in a wide variety of applications. Such applications rely on computer- and vision-based software to perform the tedious process of inspection, evaluation, and presentation while freeing the operator for data review and interpretation of the inspection results (Nielson, Hagen, and Muller, 1988). One such application has been prototyped by AlliedSignal FM&T as a result of a request for technical assistance from the MHTD Research Division.

The MHTD currently performs concrete evaluation for the purpose of determining the quality of newly laid concrete, as well as to examine concrete degradation due to aging. In the current MHTD evaluation approach, a concrete sample core is obtained from a section of roadway to be evaluated. The face of core sample is then polished and placed on a linear traverse. The sample is then scanned manually. Voids (or air spaces) within the concrete are detected visually through a microscope by incrementing the sample under the microscope crosshairs and by counting the number of "pixels" which fall within a void. The quality of the concrete is based on a characterization of the air voids existing in the sample. Both the relative percentage of air voids compared to total sample surface area and the distribution of void diameters are used in calculating 16 different microscopic properties of the concrete.

In the MHTD request for technical assistance, FM&T was asked to perform a proof-of-concept study to ascertain if video imaging techniques might be applied effectively to the problem of concrete evaluation, using such techniques to automatically scan concrete samples and determine the microscopic properties of interest. Many imaging techniques exist for applications where objects must be segmented from an image and their shapes characterized (Low, 1991; Ritter and Wilson, 1996; Russ, 1995). FM&T has developed a number of such video imaging and remote sensing applications in past years, successfully integrating data/image acquisition, signal processing, feature extraction, and pattern recognition techniques into user-friendly, automated analysis environments (Baumgart, et al, 1996; Linder, et al, 1998).

Automation of this currently manual process poses the following technical challenges.

- Voids must be detected automatically in the imagery and discriminated from aggregate, sand crystals, and cracks since the number of void pixels must be estimated in the sample.
- Each detected void must be characterized individually since a distribution of void diameters is required.
- Automated scanning of the sample must be performed to high precision to preclude overlap in adjacent fields-of-view.
- Consistency of the scanning and evaluation process is an absolute requirement.

Proof-of-Concept System Description

The system hardware used for this proof-of-concept study consists of a research grade compound microscope (a Nikon Labophot-2®), a black-and-white CCD video camera (Sony model SSC-M370 c-mount), a video monitor, and a 166-MHz Pentium personal computer equipped with an Alacron video frame grabber for acquisition of 640 x 480 pixel images. An intense light source illuminates the surface of the concrete sample from a very low, grazing angle to accentuate the voids and improve contrast. This system configuration is illustrated in Figure 1.

The fundamental processing steps involve capturing an image from the microscope field-of-view followed by the application of image segmentation and shape feature extraction techniques to the imagery. Each "object" extracted from an image is characterized with a set of shape, intensity, and local neighborhood associated features. These extracted features are then used as input into a

fuzzy logic inferencing procedure that identifies which of the detected objects are actually voids and which are background "clutter" objects (coarse aggregate, sand crystals, cracks, etc.).

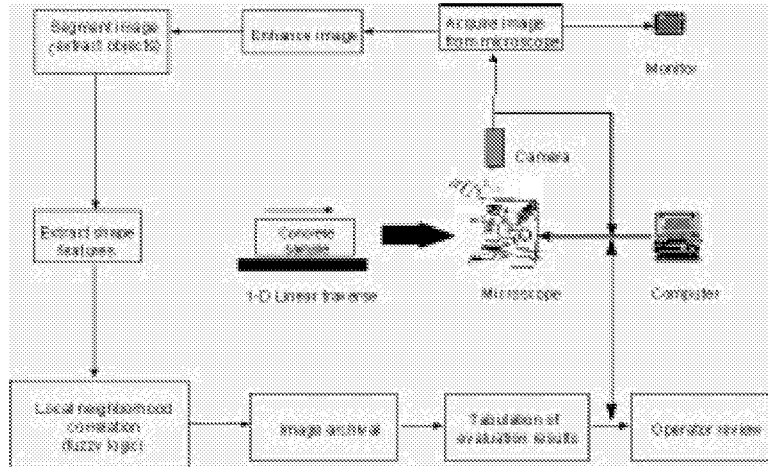


Figure 1. Hardware and data flow concept for automated scanning system.



Figure 2. Original image of concrete surface.