

MAY 28 1997  
Sta 22

43 ENGINEERING DATA TRANSMITTAL

2. To: (Receiving Organization) Robert D. Lipp, FMEF Building Cog. Engineer		3. From: (Originating Organization) Advanced Fuel Facilities Transition		4. Related EDT No.: NA	
5. Proj./Prog./Dept./Div.: FMEF/19110		6. Design Authority/ Design Agent/Cog. Engr.: Greg Dixon		7. Purchase Order No.: NA	
8. Originator Remarks: Structural Analysis of Hatch Cover Plates on Fuels and Materials Examination Facility High Bay Mezzanine				9. Equip./Component No.: NA	
				10. System/Bldg./Facility: 427/FMEF	
11. Receiver Remarks:		11A. Design Baseline Document? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		12. Major Assm. Dwg. No.: NA	
				13. Permit/Permit Application No.: NA	
				14. Required Response Date: NA	

15. DATA TRANSMITTED					(F)	(G)	(H)	(I)
(A) Item No.	(B) Document/Drawing No.	(C) Sheet No.	(D) Rev. No.	(E) Title or Description of Data Transmitted	Approval Designator	Reason for Trans- mittal	Originator Dispo- sition	Receiv- er Dispo- sition
1	HNF-SD-FM-TA-004	-	0	Structural Analysis of Hatch Cover Plates on Fuels and Materials Examination Facility High Bay Mezzanine	S	1	1	1

16. KEY					
Approval Designator (F)		Reason for Transmittal (G)		Disposition (H) & (I)	
E, S, Q, D or N/A (see WHC-CM-3-5, Sec. 12.7)		1. Approval	4. Review	1. Approved	4. Reviewed no/comment
S		2. Release	5. Post-Review	2. Approved w/comment	5. Reviewed w/comment
		3. Information	6. Dist. (Receipt Acknow. Required)	3. Disapproved w/comment	6. Receipt acknowledged

17. SIGNATURE/DISTRIBUTION (See Approval Designator for required signatures)											
(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN	(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN
1	1	Design Authority	G. E. DIXSON	5/22/97		3	4	K. L. BENNETT			
1	1	Design Agent	G. E. DIXSON	5/27/97							
1	1	Cog. Eng.	R. D. LIPP	5/19/97							
1	1	Cog. Mgr.	E. J. BITTEN	5/22/97							
1	1	QA									
1	1	Safety	S. A. NORLING	5/27/97							
		Env.									

18. Signature of EDT Originator G. E. DIXSON Date: 5-27-97		19. Authorized Representative for Receiving Organization R. D. LIPP Date: 5/29/97		20. Design Authority/ Cognizant Manager E. J. BITTEN Date: 5/28/97 FOR E.J. BITTEN PER TELECON		21. DOE APPROVAL (if required) Ctrl. No. N/A <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/comments <input type="checkbox"/> Disapproved w/comments	
--	--	---	--	--	--	---	--

5-29-97

# Structural Analysis of Hatch Cover Plates on Fuels and Materials Examination Facility High Bay Mezzanine

**Greg Dixon**

Babcock and Wilcox Hanford Company, Richland, WA 99352  
U.S. Department of Energy Contract DE-AC06-96RL13200


EDT/ECN: 617702 UC: 506  
Org Code: 19110 Charge Code: B1199  
B&R Code: EX7002000 Total Pages: 554  
*538441*  
*57109*  
*in 11-11*

Key Words: FMEF, Cover, Plate, Analysis

Abstract: This supporting document and it's attached calculations verify that the circular hatch cover plates on the FMEF, 42' level mezzanine are strong enough to support the weight of one of the Idaho National Engineering Laboratory Light Duty Utility Arm trailer rear wheels.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.



*JK Perkins (Quibis)* 5/29/97  
Release Approval Date

Release Stamp

**Approved for Public Release**

**STRUCTURAL ANALYSIS OF HATCH COVER PLATES  
ON FUELS AND MATERIALS EXAMINATION FACILITY  
HIGH BAY MEZZANINE**

**1.0 PURPOSE**

In order to move the Idaho National Engineering Laboratory (INEL) Light Duty Utility Arm (LDUA) trailer into position for testing on the Fuels and Materials Examination Facility (FMEF) 42' level mezzanine one of the trailer's wheels will have to sit on a circular hatch cover fabricated from one-inch thick steel plate. The attached calculations verify that the hatch cover plate is strong enough to support the weight of the INEL LDUA trailer's wheel.

**2.0 SUMMARY**


The maximum load for a wheel on the hatch cover plate was assumed to be half of one-quarter of the total weight of the trailer or 2,700 pounds. This is conservative because the trailers center of gravity is near the front pair of wheels. The load was assumed to be distributed around an eight-inch diameter circle at the center of the plate and the plate's boundary was assumed to be simply supported. The computed peak stress of 6,200 psi is roughly one-sixth of the yield strength of structural steel (ASTM A36). Based on this the hatch cover plate is strong enough to support the INEL LDUA trailer wheel.

Prepared By: John Friley Date: 5/27/97 Project: INEL LDA  
 Title/Subject: SUPPORT PLATE STRESSES  
 Checked By: Chris Smith

PROBLEM STATEMENT: WHEN POSITIONING THE INEL LDA ONE OF THE REAR WHEELS WILL REST ON A PLATE WHICH CURRENTLY DISPLAYS A SIGN WHICH READS "NO LOAD". IT WAS REPORTED THAT THIS SIGN IS PRESENT BECAUSE (TO DATE) NO STRUCTURAL ANALYSIS HAS BEEN PERFORMED. THE MAXIMUM LOAD THAT WILL BE EXERTED ON THE STEEL PLATE IS 2700 POUNDS. THE PURPOSE OF THIS CALCULATION IS TO SHOW STRUCTURAL ADEQUACY OF THE PLATE TO CARRY THIS LOAD (WITH SUBSTANTIAL EXCESS CAPACITY)

THE FOLLOWING DATA IS AVAILABLE FOR THE PLATE:

1. DIAMETER (42")
2. MATERIAL (STEEL)
3. PLATE THICKNESS (1")
4. MATERIAL YIELD STRENGTH (36,000 PSI) -- PLATE WAS ASSUMED TO BE A36 STRUCTURAL STEEL
5. EDGE BOUNDARY CONDITIONS CONSIST OF A BOLT CIRCLE RESTING ON SUPPORTS (SEE SKETCH BELOW)

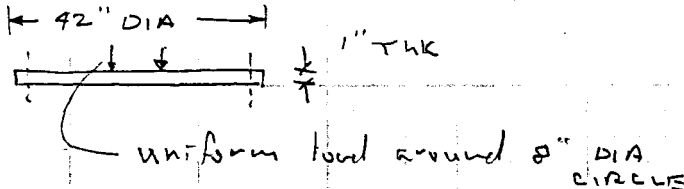

THE FOLLOWING CONSERVATIVE ASSUMPTIONS WERE MADE IN PERFORMING THE CALCULATIONS.

1. THE LOAD WAS ASSUMED TO BE DISTRIBUTED AROUND A "SMALL" 8" DIAMETER CIRCLE LOCATED IN THE CENTER OF THE PLATE. A CENTRAL LOAD WILL LIKELY GIVE HIGHER STRESSES THAN ONE LOCATED CLOSE TO A SUPPORTING EDGE.
2. THE BOUNDARY OF THE PLATE WAS ASSUMED TO BE SIMPLY SUPPORTED (THIS IS MUCH MORE CONSERVATIVE THAN THE CLAMPED CASE)
3. THE CALCULATION FORMULA WAS TAKEN FROM: TIMOSHENKO, THEORY OF PLATES AND SHELLS, MCGRAW-HILL, 2ND EDITION, 1959, PAGE 62, TABLE 3. THIS FORMULA GIVES PEAK (FLEXURE) STRESS FOR CIRCULAR, SIMPLY SUPPORTED PLATES UNDER THE ASSUMED LOADING CONDITION. (COPIES OF THE FORMULA AND RELEVANT TABLE ARE ATTACHED).

