

Currents Driven by Electron Cyclotron Waves

by

Charles F. F. Karney and Nathaniel J. Fisch

Plasma Physics Laboratory, Princeton University

Princeton, New Jersey 08544 USA

Abstract

Certain aspects of the generation of steady-state currents by electron cyclotron waves are explored. A numerical solution of the Fokker-Planck equation is used to verify the theory of Fisch and Boozer and to extend their results into the nonlinear regime. Relativistic effects on the current generated are discussed. Applications to steady-state tokamak reactors are considered.

DISCLAIMER



## I. INTRODUCTION

The generation of electric currents in a plasma by means of electron cyclotron wave absorption appears to be one of the more promising schemes of providing a steady-state toroidal current in a tokamak.<sup>1</sup> These waves can be employed to generate toroidal current merely by heating selected electrons and, interestingly, without directly injecting substantial toroidal momentum into these electrons. The wave launching structures are advantageously simple; because the wave need not have high parallel (to  $\vec{B}$ , the dc magnetic field) momentum content, its parallel phase velocity can be superluminal and, accordingly, no slow wave structure is necessary. Moreover, the utilization of the high frequency range (the wave frequency,  $\omega$ , is comparable to  $\Omega_e$ , the electron cyclotron frequency) implies that the wave power density is also high. It follows that free space waves of high power density may be injected into the plasma through conveniently small waveguide apertures in order to drive the toroidal current.

The main problem in generating current by this means is the power requirement, both in terms of the magnitude of the recycled power in a tokamak reactor as well as the capital costs of the equipment. Efficient cw power sources for this range of frequencies are yet to be developed. Assuming that these sources can be developed, the current must still be generated with minimal power dissipation for the scheme to be economically feasible in a fusion reactor. This minimization requires the absorption of the wave by only the fastest electrons, which are the most collisionless and hence retain their directed current longest. In this respect, this scheme is similar to the alternative technique of current generation by lower hybrid waves,<sup>2</sup> which also exploits, among other things, the relative infrequency with which the superthermal electrons experience collisions.

The present scheme, however, may allow the wave to resonate even with relativistic electrons<sup>3</sup> whereas the lower hybrid waves are constrained by an accessibility condition that, depending on the plasma  $\beta$  and temperature, allows resonance only with somewhat slower electrons.

It is an object of the present paper to analyze, both analytically and numerically, the mechanisms by which the absorption of electron cyclotron waves leads to the production of current. The paper is organized as follows: In Section II we consider analytically the wave absorption from the standpoint of linear theory in a slab model low density plasma. This simplified analysis nonetheless indicates the most promising injection angle of the wave into the tokamak and reasonably estimates the speed of the electrons that absorb the wave. In Section III we check numerically the formula given in Ref. 1 for  $J/P_d$ , the current generated per power dissipated, and we find close verification of the theory. We then turn to other effects that are likely to enter the problem in important parameter regimes. In Section IV we consider nonlinear effects, i.e., the effect that finite or even large wave power has on the amount of current generated and the wave damping rate. In Section V we assess the implications of relativistic effects<sup>3</sup> that become pertinent in reactor grade plasmas. In Section VI we present a summary of our findings.

Throughout our discussion we shall be comparing our observations with analytical and numerical treatments of the closely related and more familiar problem of current generation by lower hybrid waves<sup>2,4</sup> where the wave-particle interaction takes place at the Landau resonance. We conclude the present section with an important distinction between the two mechanisms. The resonance condition for electrons to exchange energy with the waves is

$$\omega - k_{\parallel} v_{\parallel} = n\Omega_e(s),$$

where  $k_{\parallel}$  is the wave parallel wavenumber,  $v_{\parallel}$  is the electron parallel velocity,  $s$  measures distance in the direction of the tokamak major radius and for lower hybrid waves  $n = 0$ , while for electron cyclotron waves  $n = \pm 1$ . It may be seen that, neglecting the poloidal magnetic field and toroidal curvature effects, electrons with the same  $v_{\parallel}$  absorb the lower hybrid wave. Near the plasma center, the plasma is hotter and denser than near the plasma periphery, so the absorption can be concentrated there as there are more electrons there to absorb the wave. This situation is depicted in Fig. 1(a), where a spectrum of waves with purposefully high parallel phase velocity is utilized to avoid power absorption near the cool and underdense periphery.

In contrast, as electron cyclotron waves propagate into regions of different magnetic field, they not only resonate with more electrons, but they resonate with electrons of different parallel velocity. This is depicted in Fig. 1(b), which indicates the phenomenon in the case of the extraordinary wave, which is launched from the high-field side of the tokamak, where there are no resonant electrons. At some interior point, however, there may be a large number of resonant electrons. Just as for the lower-hybrid wave, as the wave propagates inward, more and more electrons become resonant. However, in contrast to the case of the lower-hybrid wave, the electrons becoming resonant are those that are slower and slower as the wave nears the resonant surface,  $\omega = \Omega_e$ . The slower electrons are less efficient to heat for generating currents so that it becomes critical that the electron cyclotron wave damp completely before  $v_{\parallel}$  becomes too small.

## II. WAVE ABSORPTION

The effect of electron cyclotron resonance heating is to increase primarily the perpendicular velocity of the resonant electrons. The velocity increase lies in this direction because the waves have very little parallel momentum content compared to energy content, so that when the wave is absorbed by an electron, the electron energy increases, but, by momentum conservation, its parallel momentum barely increases. That the waves themselves have little parallel momentum to impart to the electrons is a consequence of their superluminal parallel phase velocity. The energy in a wave is proportional to  $\omega$ , while its momentum is proportional to  $\vec{k}$ . Since  $\omega/k_{\parallel} > c$ , the waves possess relatively little momentum.

Neglecting then the small parallel momentum of the wave (which vanishes in the limit  $\omega/k_{\parallel} \rightarrow \infty$ ), we view the wave-particle interaction as a diffusive process in velocity space where

$$\frac{\partial f}{\partial t} = \frac{1}{v_{\perp}} \frac{\partial}{\partial v_{\perp}} v_{\perp} D_{rf} \frac{\partial}{\partial v_{\perp}} f, \quad (1)$$

where  $f$  is the electron velocity distribution and  $D_{rf}$  is the wave diffusion coefficient which may be written heuristically as  $D_{rf} = \langle \Delta v_{\perp}^2 \rangle / \Delta t$ , where  $\Delta v_{\perp}$  is the characteristic velocity change in an autocorrelation time  $\Delta t$ . The waves accelerate electrons through a perpendicular electric field,  $E_{\perp}$ . For extraordinary waves we may write

$$\Delta v_{\perp} = \frac{e}{m} E_{\perp} \Delta t, \quad (2)$$

where  $e/m$  is the electron charge to mass ratio. The correlation time of the waves is given approximately by

$$\Delta t = \pi / \Delta k_{\perp} v_{\perp} , \quad (3)$$

where we have chosen the constant  $\pi$  so that

$$D_{rf} = \frac{\Delta v^2}{\Delta t} = \left( \frac{eE_{\perp}}{m} \right)^2 \frac{\pi}{v_{\perp} \Delta k_{\perp}} , \quad (4)$$

which is just the result derived in a more precise manner.<sup>5</sup> The power dissipated may be found from Eq. (1) as

$$P_d = \int \frac{1}{2} n_o m v_{\perp}^2 \frac{\partial f}{\partial t} d^3v = 2n_o m D_{rf} \int f d^3v \equiv 2n_r m D_{rf} , \quad (5)$$

where we integrated twice by parts to obtain the second equality, assuming  $D_{rf}$  is independent of  $v_{\perp}$  in a range in  $v_{\perp}$ , and we define  $n_r$  as the number of resonant electrons. The interpretation of Eq. (5) is that the power dissipated depends directly on the number of resonant electrons. (This result is a consequence of taking  $D_{rf}$  to be independent of  $v_{\perp}$ .) In the linear limit, the distribution function is a Maxwellian and  $n_r$  and the damping rate are independent of  $D_{rf}$ . It is possible, however, that  $n_r$  could change due to nonlinear effects. Should  $n_r$  increase, then the wave damping rate, with increasing  $D_{rf}$ , would increase rather than decrease, in contrast to the scaling in the case of lower hybrid waves. It is difficult, however, to find  $n_r$  analytically. We do, however, explore numerically nonlinear aspects of this problem in Section IV.

We consider now the implications of the linear theory on the efficiency of driving current. Using Eq. (4) and assuming  $k_{\parallel} > k_{\perp}$ , we may write the temporal damping of extraordinary waves as

$$\gamma = \frac{\pi \omega_{pe}^2}{k_{\parallel} \Delta v_{\parallel}} \frac{n_r}{n_o}, \quad (6)$$

where  $\omega_{pe}$  is the electron plasma frequency, and  $n_r$  is the density of resonant electrons in a width  $\Delta v_{\parallel}$ . The spatial damping of the wave is given in the limit of underdense plasma as

$$\alpha_s = \frac{\gamma}{v_{gs}} = \frac{\gamma k}{c k_s} = \frac{\pi}{k_s c} \frac{\omega_{pe}^2}{\Delta v_{\parallel}} \frac{n_r}{n_o}, \quad (7)$$

where subscript  $s$  denotes the direction that is also parallel to  $\hat{v}_R$ , where  $R$  is the major radius.

It is important to determine the region of velocity space in which the largest portion of the wave energy is absorbed. The wave enters the plasma at some horizontal position  $s = s_a$  and eventually loses its power at some position  $s = s_b$ . It may be imagined that at  $s = s_a$  there are no or very few electrons resonant with the wave, whereas at  $s = s_b$  there are a substantial number of electrons, hopefully with normalized parallel velocity  $v_{\parallel}/v_{te} = w \gg 1$ , that are resonant with the wave. Thus,  $s_b$  satisfies the equation

$$1 = \int_{s_b}^{s_a} \alpha(s) ds = \int_{s_b}^{\infty} \alpha(s) ds = \frac{\pi \omega_{pe}^2}{k_s c n_o \Delta v_{\parallel}} \int_{s_b}^{\infty} n_r ds. \quad (8)$$

The integral is perhaps more transparent in  $w$ -space where we write

$$\frac{n_r}{n_o} = \frac{\Delta w}{\sqrt{2\pi}} e^{-w^2/2}, \quad (9)$$

and

$$\frac{dw}{ds} = \frac{1}{v_{te}} \frac{d}{ds} \left[ \frac{\omega - \Omega_e(s)}{k_{\parallel}} \right] = \frac{\Omega_e}{k_{\parallel} R v_{te}}, \quad (10)$$

so that Eq. (8) becomes

$$I = \sqrt{\frac{\pi}{2}} \left( \frac{k_{\parallel}}{k_s} \right) \left( \frac{\omega_{pe}}{\Omega_e} \right) \left( \frac{R}{c/\omega_{pe}} \right) \frac{e^{-w^2/2}}{w}, \quad (11)$$

where  $w$  is the normalized resonant parallel velocity at  $s = s_b$ .

For fusion grade plasma, it is easily seen from Eq. (11) that  $w \gtrsim 4$  is attainable consistent with full damping of the extraordinary wave. Further optimization (i.e., damping at higher  $w$ ) can be obtained by minimizing  $k_s$  for a given  $k_{\parallel}$ . This corresponds to angling the wave not only in the toroidal direction, but also in the vertical direction as it enters the plasma.

Note that because of the exponential dependence on  $w$ , nearly all the wave energy is absorbed in a narrow range  $\Delta w$  in  $w$ . This corresponds to a narrow width  $\Delta s$  in  $s$ . To estimate the damping width  $\Delta s$ , consider that a Maxwellian exponentiates in a width  $\Delta w = 1/w$ . Thus, making use of Eq. (10), we find that  $\Delta s = k_{\parallel} R v_{te} \Delta w / \Omega_e$ , or in normalized parameters

$$\frac{\Delta s}{a} = \frac{0.1}{T_{10}^{1/2}} \left( \frac{R}{3a} \right),$$

where  $a$  is the minor radius and  $T_{10}$  is the temperature normalized to 10 keV. In the regime  $T_{10} \gtrsim 1$ , pertinent to reactors, it is seen that  $\Delta s/a$  is indeed small. The heating and current generation profiles can, however, be much broader than is apparent at first glance. This is because  $\Delta s$  only measures distance parallel to  $\vec{v}_R$ . In fact, by vertically angling the wave



( $k_s \ll k_\perp$ ) not only is the current generated at higher  $w$ , but the deposition profile is broader since the wave damping now occurs over a longer length that intersects many magnetic surfaces.

In order to determine which is actually the best configuration for current generation, a full propagation study, such as has been conducted for the heating profiles,<sup>6</sup> would have to be undertaken. Note that for a given plasma (i.e., density and temperature profiles and dimensions) there is the opportunity to vary five wave parameters: the frequency, which determines the vertical resonance surface; the poloidal angle at which the waveguide intersects the plasma periphery; the angles of injection, both in the toroidal direction and in the vertical direction; and, finally, the fifth parameter is the narrowness of the wave spectrum for a given power. The power is given roughly by the amount of current to be generated. The fifth parameter involved in the optimization dictates whether this power is to be concentrated in a narrow spectrum of  $k_\perp$  or not.

### III. CHECK OF THE LINEAR THEORY

A formula was derived in Ref. 1 for the quantity  $J/P_d$  for the case where the waves push electrons at velocities much exceeding the thermal velocity. This analysis represented a significant advance on the previous one-dimensional theory<sup>2</sup> in that it distinguishes the scattering of electrons in pitch angle and energy. Furthermore, it treats the case of electron cyclotron damping which was not covered by the one-dimensional treatment. The important approximation made in Ref. 1 was the neglect of diffusion in the energy direction. (Slowing down only was included in this direction.) The derivation itself is only valid when the speed of the resonant electrons far exceeds the electron thermal speed. We now seek to check the

theoretical result of Ref. 1 by computing  $J/P_d$  from a numerical solution of the two-dimensional Fokker-Planck equation.

The Fokker-Planck program used is the same as described in Refs. 4 and 7. That is, it solves

$$\frac{\partial}{\partial \tau} f = \frac{\partial}{\partial \vec{u}} \vec{D}_{rf} \frac{\partial}{\partial \vec{u}} f + \left. \frac{\partial f}{\partial \tau} \right|_{\text{coll}}, \quad (12)$$

where  $\vec{D}_{rf}$  is the wave diffusion tensor (a function of  $\vec{v}$ ) and the collision term  $\left. \frac{\partial f}{\partial \tau} \right|_{\text{coll}}$  is calculated assuming fixed, constant temperature backgrounds of electrons and ions. As before, we adopt a normalization where  $\tau = v_0 t$  [ $v_0 = \log \Lambda \omega_{pe}^4 / (2\pi n_0 v_{te}^3)$ ],  $\vec{u} = \vec{v} / v_{te}$  ( $v_{te}^2 = T_e / m$ ). Normalized current and power dissipation are measured in units of  $e n_0 v_{te}$  and  $v_0 n_0 T_e$  respectively. In addition we define  $x$  and  $w$  to be the perpendicular and parallel (to  $\vec{B}_0$ ) components of  $\vec{u}$ . The domain of integration is  $u \leq 10$  with the condition that there be no flux of particles normal to the boundary. Normally, we will only be concerned with cases where only the  $\vec{x}\vec{x}$  (cyclotron damping) or the  $\vec{w}\vec{w}$  (Landau damping) component of  $\vec{D}$  is nonzero.

With these normalizations  $J/P_d$  is predicted to be<sup>1</sup>

$$\frac{J}{P_d} = \frac{\hat{S} \cdot \nabla (w u^3)}{S \cdot \nabla u} \frac{4}{5 + Z_1}, \quad (13)$$

where  $\hat{S}$  is a unit vector in the direction in which the wave pushes the electrons (i.e.,  $\hat{S} = \vec{x}$  for cyclotron damping and  $\hat{S} = \vec{w}$  for Landau damping) and  $Z_1$  is the ion charge state. In practice Eq. (13) should be integrated over the spectrum of waves. A further complication arises if the waves are strong enough to alter the distribution function  $f$  significantly because

then  $f$  must be determined before Eq. (13) can be applied. These difficulties rule out a detailed comparison of Eq. (13) with the numerical results obtained for the Landau damping case.<sup>4</sup>

Here we circumvent these difficulties by choosing  $\bar{D}$  to be small and localized in velocity space. Although the localization of  $\bar{D}$  may be difficult to realize, this approach does allow us to check the physics embodied in Eq. (13). We take  $\bar{D}_{rf}$  to have a form which is zero except for  $w_1 < w < w_2$  and  $x < 1$  where it is equal to a constant  $D$  multiplying either  $\vec{x}\vec{x}$  or  $\vec{w}\vec{w}$ . We take  $w_2 - w_1 = 1$  and  $D = 10^{-3}$ . Figure 2 shows  $J/P_d$  plotted as a function of  $\langle w^2 \rangle$  where the average is computed with a Maxwellian weighting. There is excellent agreement between the numerical results (the symbols) and the analytical predictions (the lines). Interestingly, the theory and numerical results appear to agree fairly well even with  $w$  small for the cyclotron damping case but not for the Landau damping case. This is because the parallel input of momentum begins to be very substantial for low-phase velocity waves<sup>7</sup> and  $J/P_d$  must begin to increase as  $1/w$ . This effect is not present for the ECRH. Note, however, that these numerical calculations were performed assuming the background electrons to be nondrifting. If this constraint is relaxed,<sup>7</sup> the results for  $J/P_d$  for  $w_{1,2} \lesssim 1$  should be increased by a factor of about 2.

#### IV. NONLINEAR RESULTS

Normally we will be interested in cases where  $D_{rf}$  is large enough to perturb  $f$  significantly. To illustrate the type of behavior we might expect, we show in Fig. 3 plots of  $f$  for  $D = \infty$  and  $w_1 = 4$ ,  $w_2 = 5$  for the cases of cyclotron and Landau damping. (As in the previous section, we take  $D_{rf}$  to be a constant  $D$  for  $w_1 < w < w_2$ . The perpendicular extent of the waves was determined only by the integration region,  $u \leq 10$ .)

A novel method was developed to treat the case of  $D \rightarrow \infty$ . This is based on the observation that  $\hat{S} \cdot \partial f / \partial \vec{v}$  must be zero. (Recall  $\hat{S}$  is the direction in which the waves accelerate the particles.) This is achieved by replacing the diffusion operator by an averaging operator where the averaging is performed in strips aligned with  $\hat{S}$ .

Returning to Fig. 3, we first of all note that the perturbation to  $f$  is much greater in the cyclotron damping case. The reason for this is that the waves accelerate the particles so that they tend to stay in the resonant region. The waves are, therefore, more effective at accelerating the particles than waves which interact with particles via the Landau resonance. The greater perturbation in the cyclotron damping case means first that more current is generated (for Fig. 3,  $J = 3 \times 10^{-3}$  for cyclotron damping and  $6 \times 10^{-4}$  for Landau damping). Since much of this current is carried by relatively collisionless particles with high perpendicular velocity,  $J/P_d$  is approximately twice its value in the low- $D$  limit. (For  $w_1 = 4$  and  $w_2 = 5$ ,  $J/P_d = 37$  for  $D \rightarrow \infty$  while  $J/P_d = 17$  for  $D \rightarrow 0$ .) In fact, the cyclotron damped waves have overtaken the Landau damped waves which at low  $D$  were more efficient in terms of  $J/P_d$ . (For Landau damped waves with  $w_1 = 4$  and  $w_2 = 5$ ,  $J/P_d = 31$  for  $D \rightarrow \infty$  and  $J/P_d = 26$  for  $D \rightarrow 0$ .)

The ease with which cyclotron damped waves can perturb  $f$  has one interesting consequence, namely, that the power dissipated by the wave does not necessarily saturate as  $D$  is increased. ( $P_d$  did saturate for the case shown in Fig. 3 because of the effective cutoff on  $D$  at  $u = 10$ .) Such a saturation does occur with waves which are Landau damped and the results in the damping rate becoming zero as  $D \rightarrow \infty$ . With cyclotron-damped waves, the behavior of the damping rate as  $D$  varies is a function of the  $v_{\perp}$  dependence of  $D$ . In particular, even when  $D$  is large enough to greatly distort  $f$  the damping rate may be fairly close to the linear damping rate.

Figure 4 shows  $J/P_d$  and  $P_d$  as functions of  $D$  for  $w_1 = 4$  and  $w_2 = 5$ . As  $D$  is increased,  $J/P_d$  shows a steady rise while  $P_d$  is very nearly proportional to  $D$  showing the constancy of the damping rate. This is so even though the distribution at the highest value of  $D$  given in Fig. 4,  $D = 0.25$  is far from a Maxwellian; see Fig. 5. For comparison, the lower hybrid case is illustrated in Fig. 4 also. Note the strong saturation of  $P_d$ .

A corollary of the nearly linear behavior of  $P_d$  with  $D$  is that the damping of a particular component of the wave spectrum is not greatly affected by the neighboring components. This is illustrated in Table I where the cases of  $(w_1, w_2) = (4, 5), (5, 6),$  and  $(4, 6)$  with  $D = 0.1$  are compared. We see that  $J$  and  $P_d$  for the  $(4, 6)$  case is given to within 10% by the sums of the  $(4, 5)$  and  $(5, 6)$  cases. On the other hand, the discrepancy with lower hybrid waves is a factor of about 2.

The results presented in this section need to be taken with some caution because when  $D_{rf}$  is constant (as in these computations), there is a possibility of a runaway in the perpendicular direction since at high  $v_{\perp}$  the collisions are not able to hold the electrons back effectively so that particles would be continuously accelerated in  $v_{\perp}$  precluding the establishment of a steady state. The presence of the numerical cutoff of the waves at  $u = 10$  would then dramatically alter the results. However, in practice the finite perpendicular wavelength of the waves causes  $D$  to take a Bessel function dependence<sup>5</sup> so that  $D_{rf} \sim 1/v_{\perp}$  for high  $v_{\perp}$ . (In the special case of linear polarization, there is a cancellation which results in  $D_{rf} \sim 1/v_{\perp}^3$ .) This decay of  $D_{rf}$  is probably sufficiently fast to ensure the existence of a steady state. (We are assuming that at large  $v_{\perp}$  the effectiveness of  $D_{rf}$  is diluted by the geometrical factor arising from the fact the fraction of the velocity space shell at  $u$  occupied by the resonant

region is proportional to  $1/u$ . The effective  $D_{rf}$  then decays as  $1/u^2$  which is at the same rate as the frictional term in the Fokker-Planck equation. This allows the establishment of a steady state in which  $f$  decays exponentially with  $u$ .)

Now the  $1/v_{\perp}$  dependence takes over at  $v_{\perp} \sim \Omega_e/k_{\perp} \sim c$ . For typical electron temperatures ( $\sim 10$  keV) this would be  $x \sim 10$ . If we solve for  $f$  with a boundary at  $u = 10$ , then the error entailed by introducing the boundary will be small if  $f$  at the boundary is small since we know  $f$  in fact decays exponentially beyond the boundary. Because the decay rate depends on  $D_{rf}$ , we must also restrict  $D_{rf}$  from being too large. In order to determine the behavior of the particles at larger values of  $D_{rf}$  where the large  $v_{\perp}$  behavior of  $D_{rf}$  is important we must include relativistic effects because the velocities of these particles are close to that of light. This is addressed in the next section.

#### V. RELATIVISTIC EFFECTS

In this section we outline how various relativistic effects may play a role. These effects, which are pertinent to fusion grade plasmas, are all rather weak in the lower temperature reactors ( $T_{10} < 2$ ), but become increasingly important at the higher temperatures that are characteristic of more advanced reactors.

The most important relativistic effect relates to the efficiency of current generation. As described in Ref. 3, this efficiency is somewhat reduced for mildly relativistic electrons, but approaches zero for very relativistic electrons. In view of this inefficiency of relativistic electrons, this effect supercedes the additive deleterious effect of power loss through synchrotron radiation of very fast electrons.

There are other relativistic effects that impinge on the wave-particle interaction itself. One effect is the decrease in  $D_{rf}$  due to finite gyroradius effects, which is an effect available nonrelativistically too. We turn here, however, to more fundamentally relativistic effects. In our analysis, we assumed that electrons were pushed by the wave only in  $v_{\perp}$  space where they remained in resonance with the wave. The result of this would be that, in the absence of collisional effects, there would be complete flattening in  $v_{\perp}$  space for the resonant electrons, i.e.,  $f \rightarrow 0$ . Relativistic effects change this picture in two ways. First of all, as the electron perpendicular energy increases, so does its relativistic mass, which means that it can fall out of resonance. To be specific, the resonance condition is now

$$v_{\perp} = (\omega - \Omega_e/\gamma)/k_{\perp} .$$

where  $\gamma = (1 - v^2/c^2)^{-1/2}$  and  $\Omega_e$  is the cyclotron frequency of non-relativistic electrons. The result of the electron falling out of resonance is that the flattening in  $v_{\perp}$  cannot continue and  $f$  will not vanish anywhere in the collisionless limit.

The second relativistic effect impinging on the flattening of  $f$  relates to the direction in which electrons are diffused. This diffusion path may be thought of as that sector of velocity space where  $f$  is induced to be constant by the influence of a wave with parallel phase velocity  $\omega/k_{\parallel}$ . It is given by

$$E - p_{\parallel} \omega/k_{\parallel} = \text{constant} , \quad (14)$$

which is the relativistic statement of conservation of energy and parallel momentum. The effect of this is again to push electrons not purely in the perpendicular direction and hence to push them out of the resonance with the wave. Now,  $f$  becomes normalizable in the collisionless limit.

To appreciate Eq. (14), it is helpful to picture these diffusion paths. In the nonrelativistic limit, Eq. (14) describes the familiar concentric circles in velocity space about the point  $(v_{\perp} = 0, v_{\parallel} = \omega/k_{\parallel})$ . Consider, however, Fig. 6(a) where diffusion paths due to a wave at  $\omega/k_{\parallel} = 0.6 c$  are depicted. The familiar circles are now seen to be somewhat distorted in order to assure that the particle velocity remain less than  $c$ . In Fig. 6(b) we show diffusion paths due to a superluminal wave with  $\omega/k_{\parallel} = 2 c$ . Here, the topology of the paths are seen to have changed from ellipsoidal to hyperboloidal surfaces. The topology change is characteristic of superluminal waves and occurs in momentum space too. In Fig. 6(c) we show the diffusion paths in momentum space for  $\omega/k_{\parallel} = 1.1 c$ .

We now turn to relativistic effects that impinge upon technological considerations. From an engineering standpoint, it would be most preferred to use a wave of the lowest possible frequency and to inject it from the low field side of the tokamak.

Consider first the launching of the extraordinary plasma wave which must be done from the high-field side of the tokamak. The resonance condition  $k_{\parallel} v_{\parallel} = \omega - \Omega_e/\gamma$  may be written as

$$\left| \frac{\omega}{\Omega_e/\gamma} \right| = \left( 1 + \frac{v_{\perp}^2}{\omega/k_{\parallel}} \right)^{-1} \quad (15)$$



and two implications with respect to minimizing  $\omega$  become apparent. Note that  $\omega/k_{\parallel} > c$ ; however, at reactor grade temperatures,  $v_{\parallel}$  may approach  $c$ . Thus, we may bound

$$\frac{1}{2} < \frac{\omega}{\Omega_e/\gamma} < 1,$$

and the lower (preferable) limit is accessible only for nearly parallel injection ( $k_{\parallel} \gg k_{\perp}$ ) and absorption by relativistic electrons. This limit is preferred because it minimizes the frequency of the power source.

The second point to be made about Eq. (15) is that for relativistic electrons  $\gamma$  becomes large, which has the effect of requiring a smaller frequency power source.

For the ordinary wave, which is launched from the low field side, similar considerations are pertinent. Here we have

$$\left| \frac{\omega}{\Omega_e/\gamma} \right| = \left( 1 - \frac{k_{\parallel} v_{\parallel}}{\omega} \right)^{-1},$$

and, for this wave  $k_{\parallel}$  small implies  $\omega$  smaller and  $\omega > \Omega_e/\gamma$  is always true.

## VI. CONCLUSIONS

We have examined various aspects of current drive by electron cyclotron waves. Although the current drive mechanism is intrinsically less efficient than for current drive by lower hybrid waves, the greater flexibility of positioning the wave spectrum and the nonlinear enhancement of  $J/P_D$  given in Section IV offset this disadvantage.

The most interesting result of the numerical studies of the nonlinear problem is that the damping rate of the wave is nearly independent of the

power level. The weak dependence that there is is masked by the exponential factor  $\exp(-w_1^2/2)$  entering the formula for the power dissipated. This means that ray-tracing codes may safely use linear damping theory. Nonlinear effects become important in estimating the current drive efficiency, where the nonlinearity can enhance  $J/P_d$  by up to a factor of about 2.

In order for the current to be generated in a single direction, we require that all the power be absorbed before the cyclotron layer. In Section II it was shown that this was easily achieved with the extraordinary wave in a reactor. An additional margin of safety is provided, however, by positioning the source close to the top or bottom of the machine (but still in the high-field side of the cyclotron layer) since the group velocity, normal to the cyclotron layer is, thereby, reduced. Such an arrangement also allows easier access for the waveguides.

We have presented here only the numerical results for the extraordinary wave for which  $D$  is independent of  $v_{\perp}$  for low  $v_{\perp}$ . For the ordinary wave the polarization of the wave is such that the electric field vector is rotating in the opposite direction to that of the electrons. The diffusion coefficient  $D$  then behaves as  $v_{\perp}^4$  for low  $v_{\perp}$ . This is more difficult to model numerically because of the greater importance of an accurate treatment of the behavior of large  $v_{\perp}$  particles. We expect that for a given  $w_1$  and  $w_2$  the efficiency of current generation will be greater because more of the current is carried by collisionless high-velocity particles. However, the damping rate is also weaker so that more current will be generated at lower values of  $w_1$ .

Several phenomena influence the diffusion of electrons at high  $v_{\perp}$ . Finite wavelength effects cause the diffusion coefficient to oscillate with

a Bessel function dependence. Equally important, however, may be relativistic effects which change both the diffusion paths and the resonant region. Relativistic effects also allow the use of frequencies substantially below the cyclotron frequency. This will be important in hot second-generation reactors.

#### ACKNOWLEDGMENTS

The authors would like to thank E. Ott for useful discussions.

This work was supported by the United States Department of Energy under contract number DE-AC02-76-CH03073.

REFERENCES

- [1] FISCH, N. J. and BOOZER, A. H., Phys. Rev. Lett. 45, 720 (1980).
- [2] FISCH, N. J., Phys. Rev. Lett. 41, 873 (1978) and 42, 410 (1979).
- [3] FISCH N. J., Princeton Plasma Physics Laboratory Report PPPL-1739 (1981).
- [4] KARNEY, C. F. F. and FISCH, N. J., Phys. Fluids 22, 1817 (1979).
- [5] KENNEL, C. F. and ENGELMANN, F., Phys. Fluids 9, 2377 (1966).
- [6] OTT, E., HUI, B., and CHU, K. R., Phys. Fluids 23, 1031 (1980).
- [7] FISCH, N. J. and KARNEY, C. F. F., Phys. Fluids 24, 27 (1981).

TABLE I.

J and  $P_d$  for  $(w_1, w_2) = (4, 5), (5, 6),$  and  $(4, 6)$ , and  $D = 0.1$ . The subscripts cyc and lh denote cyclotron waves and lower hybrid waves. The column headed "sum" is the sum of the columns  $(4, 5)$  and  $(4, 6)$ .

$(w_1, w_2)$	(4, 5)	(5, 6)	sum	(4, 6)
$J_{cyc}$	$1.7 \times 10^{-4}$	$2.5 \times 10^{-6}$	$1.8 \times 10^{-4}$	$2.1 \times 10^{-4}$
$P_{d,cyc}$	$7.9 \times 10^{-6}$	$7.9 \times 10^{-8}$	$8.0 \times 10^{-6}$	$8.8 \times 10^{-6}$
$J_{lh}$	$7.4 \times 10^{-4}$	$1.1 \times 10^{-5}$	$7.5 \times 10^{-4}$	$1.4 \times 10^{-3}$
$P_{d,lh}$	$2.2 \times 10^{-5}$	$2.4 \times 10^{-7}$	$2.2 \times 10^{-5}$	$3.6 \times 10^{-5}$

FIGURE CAPTIONS

Fig. 1. Comparison of electron cyclotron and lower hybrid methods of current drive. The wave spectrum and distribution function for the lower hybrid (a) and the electron cyclotron (b) methods of current drive.

Fig. 2.  $J/P_D$  for small  $D$  as a function of  $\langle w \rangle$  where  $D = 10^{-3}$ ,  $w_2 - w_1 = 1$ . The waves exist only for  $x < 1$ . The open circles denote cyclotron damping and closed circles Landau damping. The lines show the theoretical predictions of Eq. (13).

Fig. 3. The steady-state distribution functions for  $D \rightarrow \infty$  with  $w_1 = 4$ , and  $w_2 = 5$ . Figures (a) and (b) show the cases of electron cyclotron waves and lower hybrid waves, respectively.

Fig. 4.  $J/P_D$  (a) and  $P_D$  (b) as functions of  $D$  for  $w_1 = 4$  and  $w_2 = 5$ . The open circles denote cyclotron damping and the closed circles Landau damping.

Fig. 5. Steady-state distribution for  $D \approx 0.25$ ,  $w_1 = 4$ , and  $w_2 = 5$  (cyclotron damping).

Fig. 6. Diffusion paths for particles in waves. Velocity space with (a)  $\omega/k_{\parallel} = 3.6 c$ , (b)  $\omega/k_{\parallel} = 2 c$ , (c) momentum space with  $\omega/k_{\parallel} = 1.1 c$ .

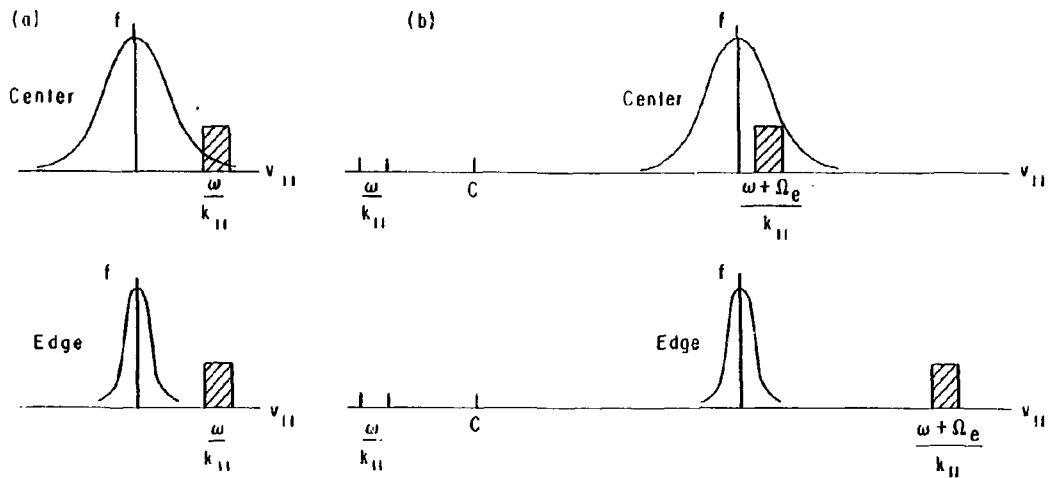


Fig 1 Comparison of electron cyclotron and lower hybrid methods of current drive. The wave spectrum and distribution function for the lower hybrid (a) and the electron cyclotron (b) methods of current drive.

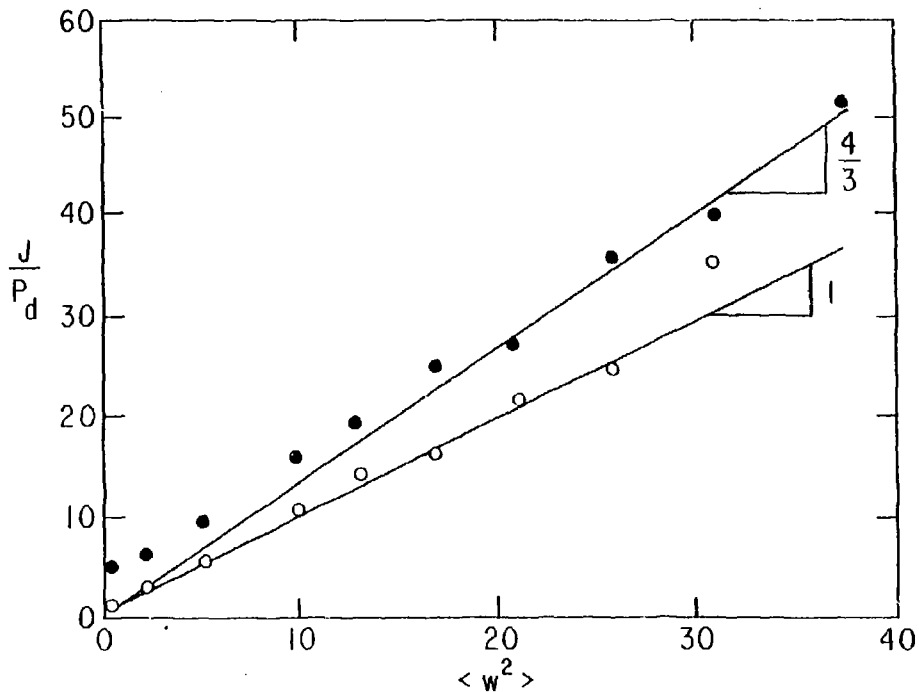


Fig. 2  $J/P_d$  for small  $D$  as a function of  $\langle w^2 \rangle$  where  $D = 10^{-3}$ ,  $w_2 - w_1 = 1$ . The waves exist only for  $x < 1$ . The open circles denote cyclotron damping and closed circles Landau damping. The lines show the theoretical predictions of Eq. (13).



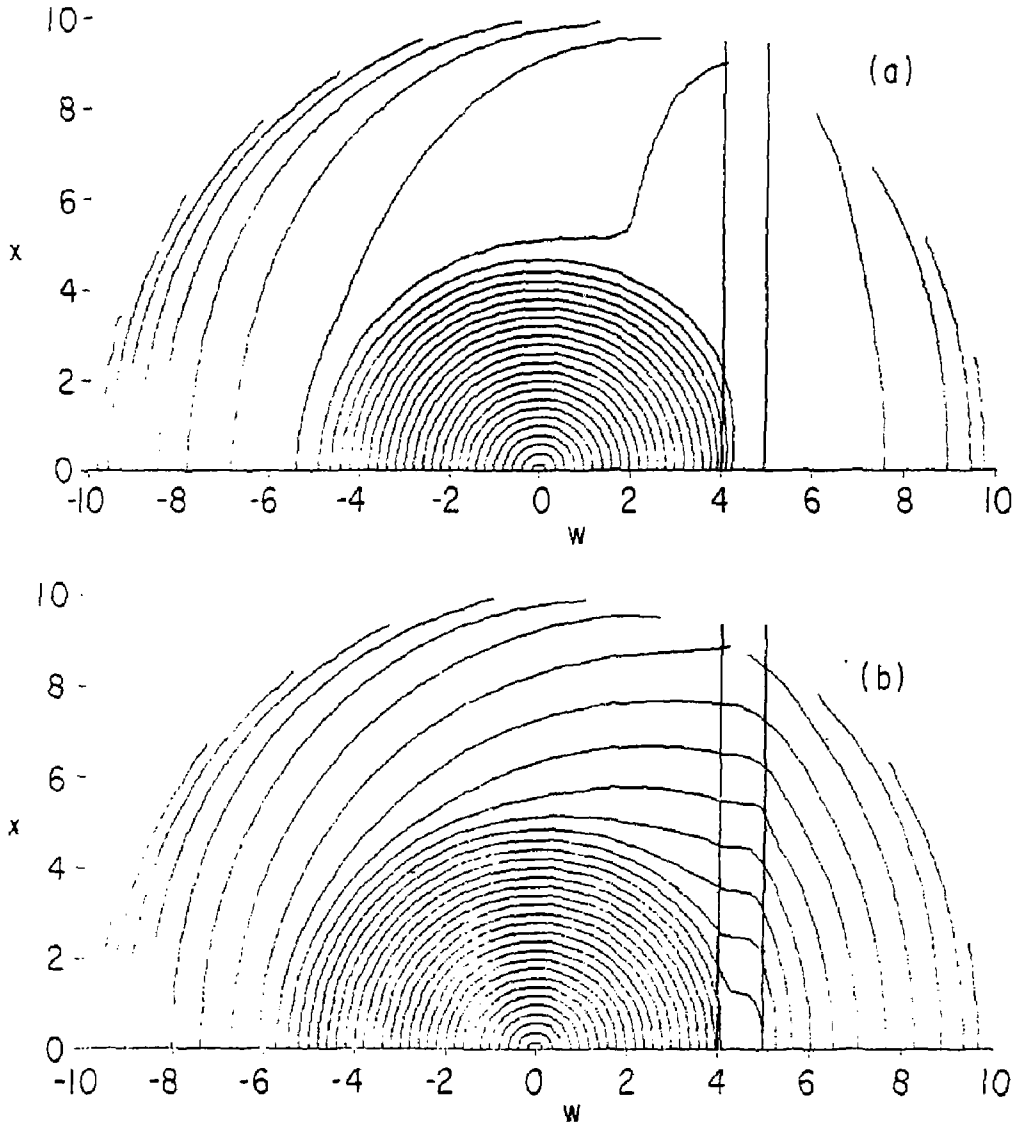


Fig. 3 The steady-state distribution functions for  $D^+ \approx$  with  $w_1 = 4$ , and  $w_2 = 5$ . Figures (a) and (b) show the cases of electron cyclotron waves and lower hybrid waves, respectively.

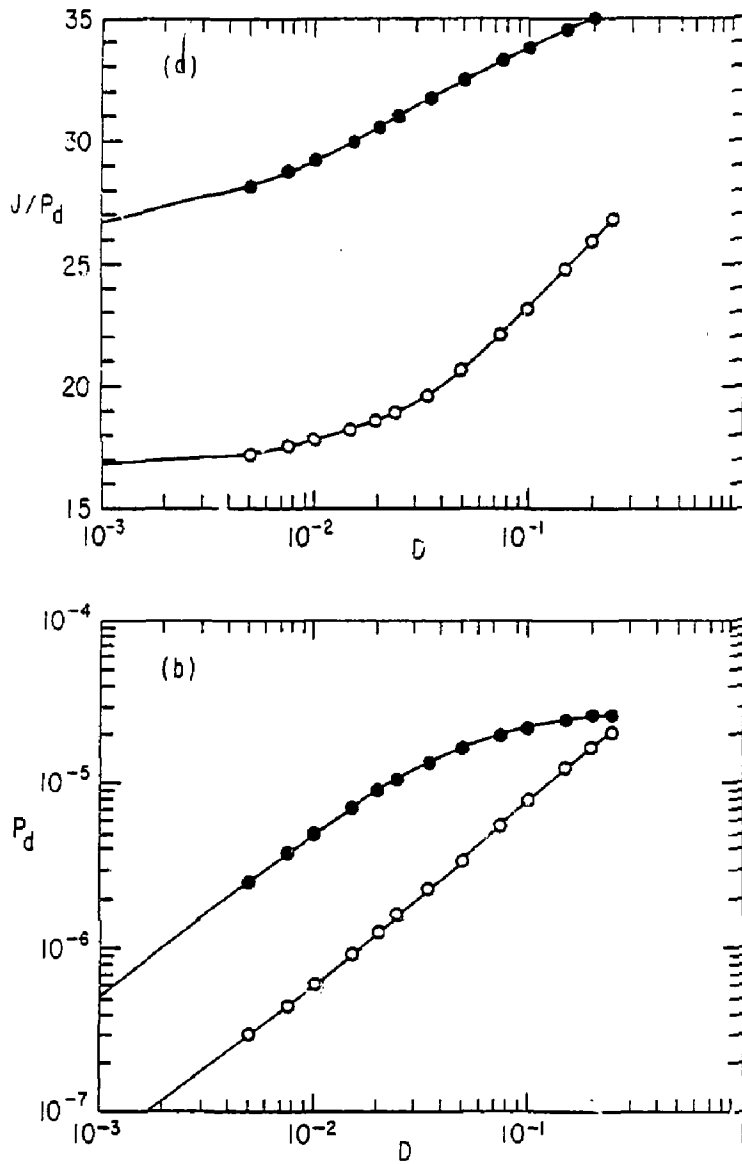


Fig. 4  $J/P_d$  (a) and  $P_d$  (b) as functions of  $D$  for  $w_1 = 4$  and  $w_2 = 5$ . The open circles denote cyclotron damping and the closed circles Landau damping.

# 81T0119

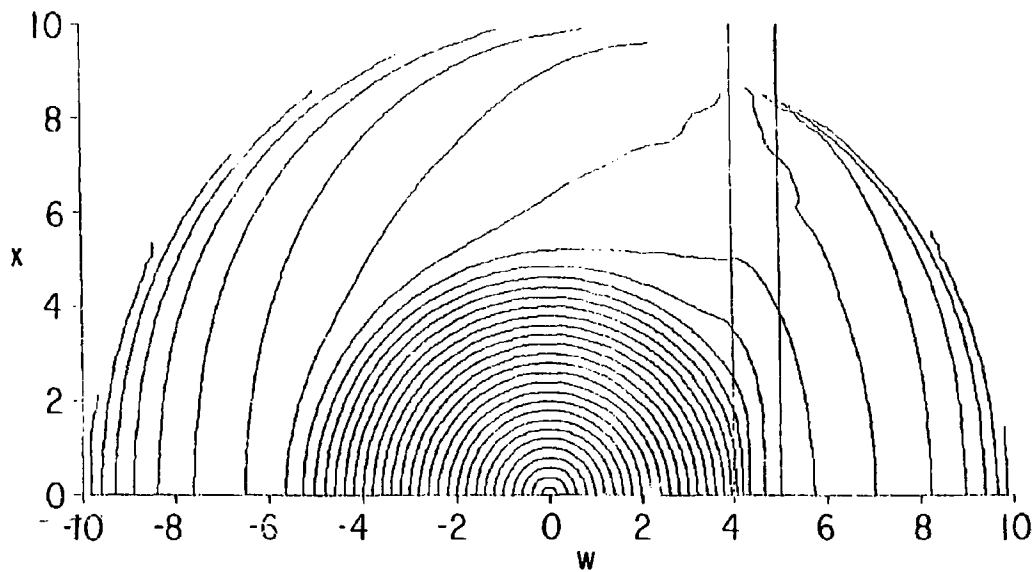


Fig. 5 Steady-state distribution for  $D = 0.25$ ,  $w_1 = 4$ ,  $w_2 = 5$  (cyclotron damping).

#810121

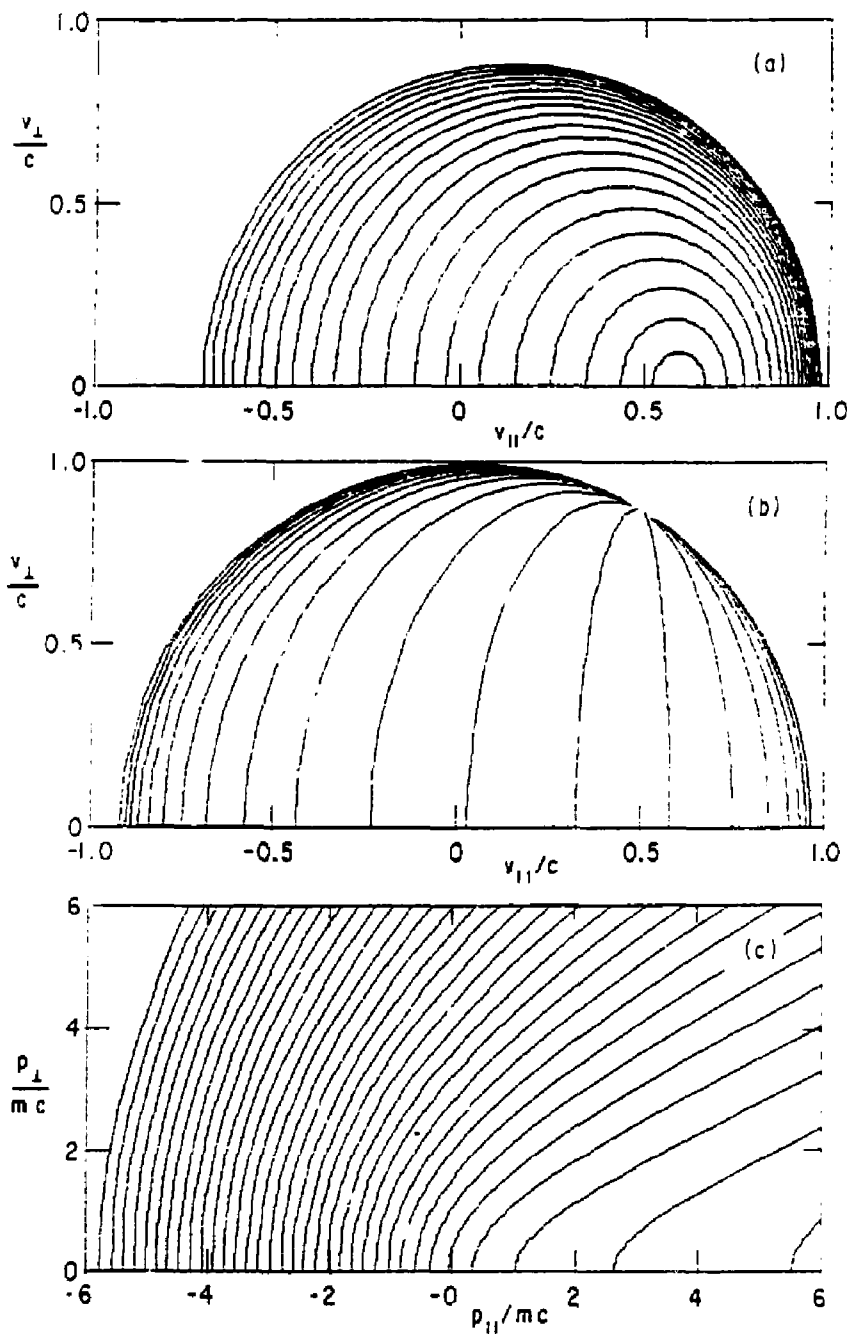


Fig. 6 Diffusion paths for particles in waves. Velocity space with (a)  $\omega/k_{\parallel} = 0.6 c$ , (b)  $\omega/k_{\parallel} = 2 c$ , (c) momentum space with  $\omega/k_{\parallel} = 1.1 c$ .

## EXTERNAL DISTRIBUTION IN ADDITION TO TIC UC-20

## ALL CATEGORIES

- R. Askew, Auburn University, Alabama  
 S. T. Wu, Univ. of Alabama  
 Geophysical Institute, Univ. of Alaska  
 G.L. Johnston, Sonoma State Univ, California  
 H. H. Kuehl, Univ. of S. California  
 Institute for Energy Studies, Stanford University  
 H. D. Campbell, University of Florida  
 N. L. Oleson, University of South Florida  
 W. M. Stacey, Georgia Institute of Technology  
 Benjamin Ma, Iowa State University  
 Magne Kristiansen, Texas Tech. University  
 W. L. Wiese, Nat'l Bureau of Standards, Wash., D.C.  
 Australian National University, Canberra  
 C.N. Watson-Munro, Univ. of Sydney, Australia  
 F. Cap, Inst. for Theo. Physics, Austria  
 Dr. M. Heinder, Institute for Theoretical Physics  
 Technical University of Graz  
 Ecole Royale Militaire, Bruxelles, Belgium  
 D. Palumbo, C. European Comm. B-1049-Brussels  
 P.H. Sakanaka, Instituto de Fisica, Campinas, Brazil  
 M.P. Bachynski, MPB Tech., Ste. Anne de Bellevue,  
 Quebec, Canada  
 C. R. James, University of Alberta, Canada  
 T.W. Johnston, INRS-Energie, Vareenes, Quebec  
 H. M. Skarsgard, Univ. of Saskatchewan, Canada  
 Inst. of Physics, Academia Sinica, Peking  
 People's Republic of China  
 Inst. of Plasma Physics, Hefei,  
 Anhwei Province, People's Republic of China  
 Library, Tang Hua Univ., Peking, People's  
 Republic of China  
 Zhengwu Li, Southwestern Inst. of Phys., Leshan,  
 Sichuan Province, People's Republic of China  
 Librarian, Culham Laboratory, Abingdon, England (2)  
 A.M. Dupas Library, C.E.N.-G, Grenoble, France  
 Central Res. Inst. for Physics, Hungary  
 S. R. Sharma, Univ. of Rajasthan, JAIPUR-4, India  
 R. Shingal, Meerut College, India  
 A.K. Sundaram, Phys. Res. Lab., India  
 Biblioteca, Frascati, Italy  
 Biblioteca, Milano, Italy  
 G. Rostagni, Univ. Di Padova, Padova, Italy  
 Preprint Library, Inst. de Fisica, Pisa, Italy  
 Library, Plasma Physics Lab., Gokasho, Uji, Japan  
 S. Mori, Japan Atomic Energy Res. Inst., Tokai-Mura  
 Research Information Center, Nagoya Univ., Japan  
 S. Shoda, Tokyo Inst. of Tech., Japan  
 Inst. of Space & Aero. Sci., Univ. of Tokyo  
 T. Uchida, Univ. of Tokyo, Japan  
 H. Yamato, Toshiba R. & D. Center, Japan  
 M. Yoshikawa, JAERI, Tokai Res. Est., Japan  
 Dr. Tsuneo Nakakita, Toshiba Corporation,  
 Kawasaki-Ku Kawasaki, 210 Japan  
 N. Yajima, Kyushu Univ., Japan  
 R. England, Univ. Nacional Auto-noma de Mexico  
 B. S. Liley, Univ. of Waikato, New Zealand  
 S. A. Moss, Saab Univas Norge, Norway  
 J.A.C. Cabral, Univ. de Lisboa, Portugal  
 O. Petrus, A.L.I. CUZA Univ., Romania  
 J. de Villiers, Atomic Energy Bd., South Africa  
 A. Maurech, Comisaria De La Energy y Recursos  
 Minerales, Spain  
 Library, Royal Institute of Technology, Sweden  
 Cen. de Res. En Phys. Des Plasmas, Switzerland  
 Librarian, Fom-Instituut voor Plasma-Fysica,  
 The Netherlands
- Bibliothek, Stuttgart, West Germany  
 R.D. Buhler, Univ. of Stuttgart,  
 West Germany  
 Max-Planck-Inst. fur Plasmaphysik,  
 W. Germany  
 Nucl. Res. Estab., Julich, West Germany  
 K. Schindler, Inst. Fur Theo. Physik,  
 W. Germany
- EXPERIMENTAL  
 THEORETICAL
- M. H. Brennan, Flinders Univ. Australia  
 H. Barnard, Univ. of British Columbia, Canada  
 S. Screenivasan, Univ. of Calgary, Canada  
 J. Radet, C.E.N.-B.P., Fontenay-aux-Roses,  
 France  
 Prof. Schatzman, Observatoire de Nice,  
 France  
 S. C. Sharma, Univ. of Cape Coast, Ghana  
 R. N. Aiyer, Laser Section, India  
 B. Buti, Physical Res. Lab., India  
 L. K. Chavda, S. Gujarat Univ., India  
 I.M. Das, Banaras Hindu Univ., India  
 S. Cuperman, Tel Aviv Univ., Israel  
 E. Greenspan, Nucl. Res. Center, Israel  
 P. Rosenau, Israeli Inst. of Tech., Israel  
 Int'l. Center for Theo. Physics, Trieste, Italy  
 I. Kawakami, Nihon University, Japan  
 T. Nakayama, Ritsumeikan Univ., Japan  
 S. Nagao, Tohoku Univ., Japan  
 J.I. Sakai, Toyama Univ., Japan  
 S. Tjotta, Univ. I Bergen, Norway  
 M.A. Hellberg, Univ. of Natal, South Africa  
 H. Wilhelmson, Chalmers Univ. of Tech.,  
 Sweden  
 Astro. Inst., Sonnenborgh Obs.,  
 The Netherlands  
 T. J. Boyd, Univ. College of North Wales  
 K. Hubner, Univ. Heidelberg, W. Germany  
 H. J. Kaeppler, Univ. of Stuttgart,  
 West Germany  
 K. H. Spatschek, Univ. Essen, West Germany
- EXPERIMENTAL  
 ENGINEERING
- B. Grek, Univ. du Quebec, Canada  
 P. Lukac, Komenskeho Univ., Czechoslovakia  
 G. Horikoshi, Nat'l Lab for High Energy Physics,  
 Tsukuba-Gun, Japan
- EXPERIMENTAL
- F. J. Padoni, Univ. of Wollongong, Australia  
 J. Kistemaker, Fom Inst. for Atomic  
 & Molec. Physics, The Netherlands
- THEORETICAL
- F. Verheest, Inst. Vor Theo. Mech., Belgium  
 J. Teichmann, Univ. of Montreal, Canada  
 T. Kahan, Univ. Paris VII, France  
 R. K. Chhajlani, India  
 S. K. Trehan, Panjab Univ., India  
 T. Namikawa, Osaka City Univ., Japan  
 H. Narumi, Univ. of Hiroshima, Japan  
 Korea Atomic Energy Res. Inst., Korea  
 E. T. Karlson, Uppsala Univ., Sweden  
 L. Stenflo, Univ. of UMEA, Sweden  
 J. R. Seraf, New Univ., United Kingdom